TEXAS INSTRUMENTS
Data sheet acquired from Harris Semiconductor
SCHS107A – Revised March 2002

CD40194B Types

CMOS 4-Bit Bidirectional Universal Shift Register

NOT RECOMMENDED FOR NEW DESIGNS

High-Voltage Types (20 Volt Rating)

■ CD40194B is a universal shift register featuring parallel inputs, parallel outputs SHIFT RIGHT and SHIFT LEFT serial inputs, and a direct overriding clear input. In the parallel-load mode (S0 and S1 are high), data is loaded into the associated flip-flop and appears at the output after the positive transition of the CLOCK input. During loading, serial data flow is inhibited. Shift right and shift left are accomplished synchronously on the positive clock edge with data entered at the SHIFT RIGHT and SHIFT LEFT serial inputs, respectively. Clocking of the register is inhibited when both mode control inputs are low. When low, the RESET input resets all stages and forces all outputs low.

The CD40194 types are supplied in 16-lead ceramic dual-in-line packages (D and F suffixes), 16-lead dual-in-line plastic packages (E suffix), 16-lead small-outline package (NSR suffix), and in chip form (H suffix).

Features:

- Medium-speed: f_{CL} = 12 MHz (typ.) @ V_{DD} = 10 V
- Fully static operation
- Synchronous parallel or serial operation
- Asynchronous master reset
- Standardized, symmetrical output characteristics
- 5-V, 10-V, and 15-V parametric ratings
- Meets all requirements of JEDEC Tentative Standard No. 13B, "Standard Specifications for Description of 'B' Series CMOS Devices"

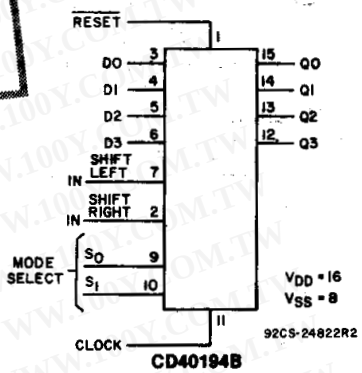

CD40194B
FUNCTIONAL DIAGRAM

Applications:

- Arithmetic unit bus registers
- Serial/parallel conversions
- General-purpose register for bus-organized systems
- General-purpose registers

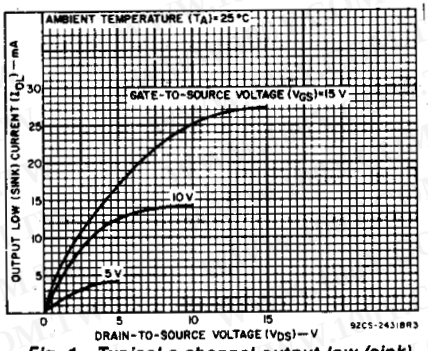

Fig. 1—Typical n-channel output low (sink) current characteristics.

MAXIMUM RATINGS, *Absolute-Maximum Values:*

DC SUPPLY-VOLTAGE RANGE, (V_{DD})
Voltages referenced to V_{SS} Terminal) ..... −0.5V to +20V
INPUT VOLTAGE RANGE, ALL INPUTS ..... −0.5V to V_{DD} +0.5V
DC INPUT CURRENT, ANY ONE INPUT ..... ±10mA
POWER DISSIPATION PER PACKAGE (P_D):
For T_A = −55°C to +100°C 500mW
For T_A = +100°C to +125°C ..... Derate Linearity at 12mW/°C to 200mW
DEVICE DISSIPATION PER OUTPUT TRANSISTOR
FOR T_A = FULL PACKAGE-TEMPERATURE RANGE (All Package Types) 100mW
OPERATING-TEMPERATURE RANGE (T_A) ..... −55°C to +125°C
STORAGE TEMPERATURE RANGE (T_{stg}) ..... −65°C to +150°C
LEAD TEMPERATURE (DURING SOLDERING):
At distance 1/16 ± 1/32 inch (1.59 ± 0.79mm) from case for 10s max ..... +265°C

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

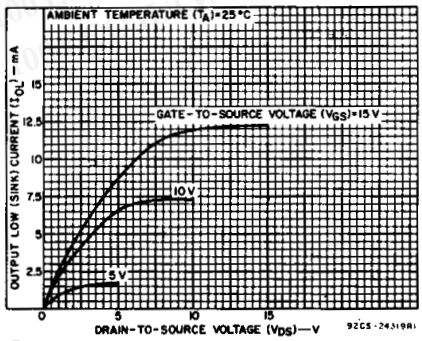

Fig. 2—Minimum n-channel output low (sink) current characteristics.

Copyright © 2002, Texas Instruments Incorporated

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

RECOMMENDED OPERATING CONDITIONS at T_A = 25°C, Except as Noted.
For maximum reliability, nominal operating conditions should be selected so that operation is always within the following ranges:

CHARACTERISTIC		VDD (V)	LIMITS Min.	LIMITS Max.	UNITS
Supply-Voltage Range (For Package-Temperature Range)			3	18	V
Setup Time, D0, D3, SR_{IN}, SL_{IN} to clock	t_S	5	100	—	ns
		10	70	—	
		15	50	—	
SELECT 0, SELECT 1 to clock		5	400	—	
		10	220	—	
		15	130	—	
Hold Time, D0, D03, SR_{IN}' SL_{IN} to clock	t_H	5	0	—	
		10	0	—	
		15	0	—	
SELECT 0, SELECT 1 to clock		5	0	—	
		10	0	—	
		15	0	—	
Clock Pulse Width,	t_W	5	180	—	
		10	80	—	
		15	50	—	
Clock Input Frequency	f_{CL}	5	—	3	MHz
		10	—	6	
		15	—	8	
Clock Input Rise or Fall Time,	t_rCL, t_fCL	5	1000	—	μs
		10	100	—	
		15	100	—	
Reset Pulse Width,	t_{WR}	5	300	—	ns
		10	200	—	
		15	140	—	

CONTROL TRUTH TABLE FOR CD40194B SERIES

CLOCK	MODE SELECT S_0	MODE SELECT S_1	$\overline{RESET}$	ACTION
X	0	0	1	No Change
↑	1	0	1	Shift Right (Q0 toward Q3)
↑	0	1	1	Shift Left (Q3 toward Q0)
↑	1	1	1	Parallel Load
X	X	X	0	Reset

1 = High level
0 = Low level
X = Don't care
▲ = Level change

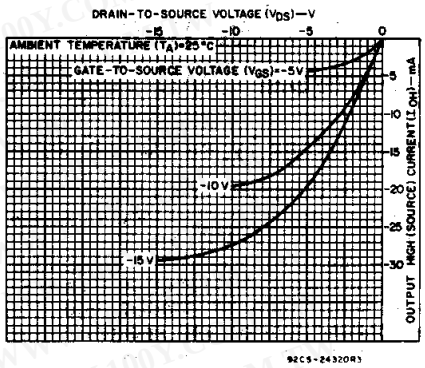

Fig. 3—Typical p-channel output high (source) current characteristics.

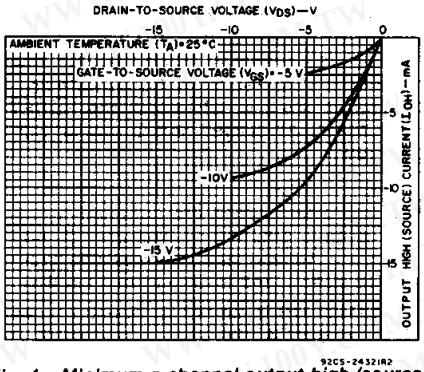

Fig. 4—Minimum p-channel output high (source) current characteristics.

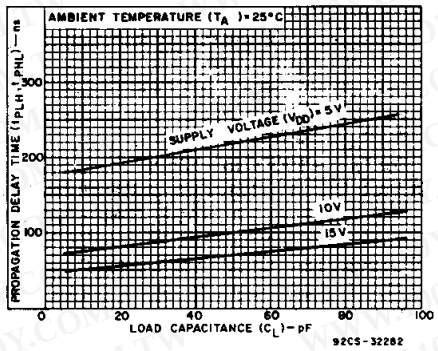

Fig. 5—Typical propagation delay time as a function of load capacitance, (CLOCK to Q).

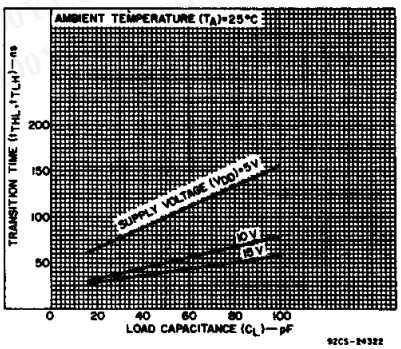

Fig. 6—Typical transition time as a function of load capacitance.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

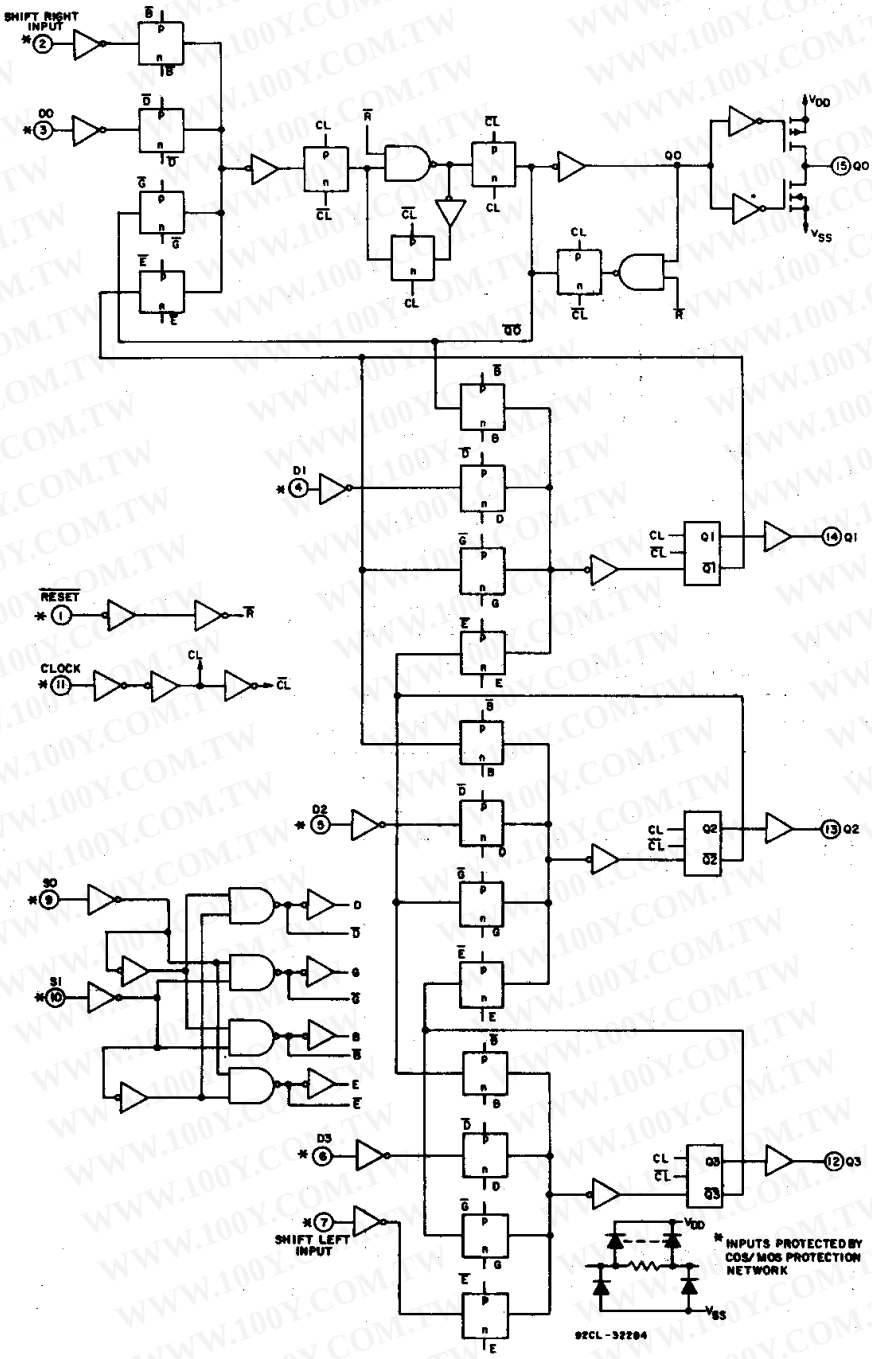

Fig. 8—CD40194B logic diagram.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

STATIC ELECTRICAL CHARACTERISTICS

CHARACTERISTIC	CONDITIONS			LIMITS AT INDICATED TEMPERATURES (°C)							UNITS
	V_O (V)	V_{IN} (V)	V_{DD} (V)	−55	−40	+85	+125	+25 Min.	+25 Typ.	+25 Max.	
Quiescent Device Current, I_{DD} Max.	—	0,5	5	5	5	150	150	—	0.04	5	μA
	—	0,10	10	10	10	300	300	—	0.04	10	
	—	0,15	15	20	20	600	600	—	0.04	20	
	—	0,20	20	100	100	3000	3000	—	0.08	100	
Output Low (Sink) Current, I_{OL} Min.	0.4	0,5	5	0.64	0.61	0.42	0.36	0.51	1	—	mA
	0.5	0,10	10	1.6	1.5	1.1	0.9	1.3	2.6	—	
	1.5	0,15	15	4.2	4	2.8	2.4	3.4	6.8	—	
Output High (Source) Current, I_{OH} Min.	4.6	0,5	5	−0.64	−0.61	−0.42	−0.36	−0.51	−1	—	
	2.5	0,5	5	−2	−1.8	−1.3	−1.15	−1.6	−3.2	—	
	9.5	0,10	10	−1.6	−1.5	−1.1	−0.9	−1.3	−2.6	—	
	13.5	0,15	15	−4.2	−4	−2.8	−2.4	−3.4	−6.8	—	
Output Voltage: Low-Level, V_{OL} Max.	—	0,5	5	0.05				—	0	0.05	V
	—	0,10	10	0.05				—	0	0.05	
	—	0,15	15	0.05				—	0	0.05	
Output Voltage: High-Level, V_{OH} Min.	—	0,5	5	4.95				4.95	5	—	
	—	0,10	10	9.95				9.95	10	—	
	—	0,15	15	14.95				14.95	15	—	
Input Low Voltage, V_{IL} Max.	0.5,4.5	—	5	1.5				—	—	1.5	
	1,9	—	10	3				—	—	3	
	1.5,13.5	—	15	4				—	—	4	
Input High Voltage, V_{IH} Min.	0.5,4.5	—	5	3.5				3.5	—	—	
	1,9	—	10	7				7	—	—	
	1.5,13.5	—	15	11				11	—	—	
Input Current I_{IN} Max.	—	0,18	18	±0.1	±0.1	±1	±1	—	$\pm10^{-5}$	±0.1	μA
3-State Output Leakage Current, I_{OUT} Max.	0,18	0,18	18	±0.4	±0.4	±12	±12	—	$\pm10^{-4}$	±0.4	μA

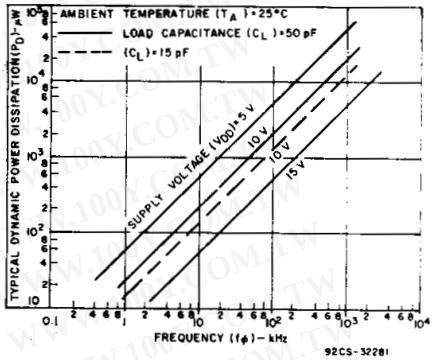

Fig. 9—Typical power dissipation as a function of frequency.

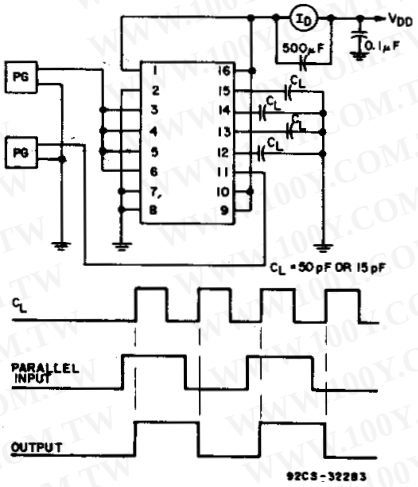

Fig. 10—Dynamic power dissipation test circuit.



Fig. 11—Quiescent-device-current test circuit.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

DYNAMIC ELECTRICAL CHARACTERISTICS at T_A = 25°C, Input t_r, t_f = 20 ns, C_L = 50 pF, R_L = 200 kΩ

CHARACTERISTIC	TEST CONDITIONS V_{DD} V	LIMITS Min.	Typ.	Max.	UNITS
Propagation Delay Time: Clock to Q t_{PHL}, t_{PLH}	5	—	220	440	ns
	10	—	100	200	
	15	—	70	140	
Output Transition Time t_{THL}, t_{TLH}	5	—	100	200	
	10	—	50	100	
	15	—	40	80	
Minimum Setup Time: t_S D0, D3, SR_{IN}, SL_{IN} to Clock	5	—	80	160	
	10	—	35	70	
	15	—	20	50	
SELECT 0, SELECT 1 to Clock	5	—	200	400	
	10	—	110	220	
	15	—	65	130	
Minimum Hold Time: t_H D0, D3, SR_{IN}, SL_{IN} to Clock	5	—	−65	0	
	10	—	−25	0	
	15	—	−15	0	
SELECT 0, SELECT 1 to Clock	5	—	−170	0	
	10	—	−95	0	
	15	—	−55	0	
Minimum Clock Pulse Width t_W	5	—	90	180	
	10	—	40	80	
	15	—	25	50	
Maximum Clock Input Frequency f_{CL}	5	3	6	—	MHz
	10	6	12	—	
	15	8	15	—	
Maximum Clock Rise or Fall Time t_rCL, t_fCL	5	—	—	1000	μs
	10	—	—	100	
	15	—	—	100	
Mininum Reset Pulse Width* t_{WR}	5	—	150	300	ns
	10	—	100	200	
	15	—	70	140	
Reset Propagation Delay t_{PRHL}	5	—	230	460	
	10	—	90	180	
	15	—	65	130	
Input Capacitance C_{IN}	Any Input	—	5	7.5	pF

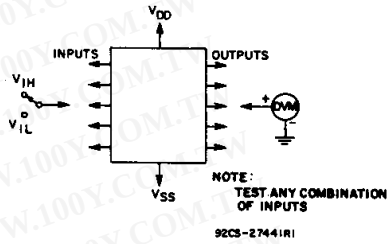

Fig. 12—Input-voltage test circuit.

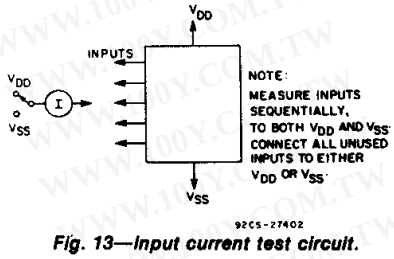

Fig. 13—Input current test circuit.

TERMINAL DIAGRAM

Top View



CD40194B

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

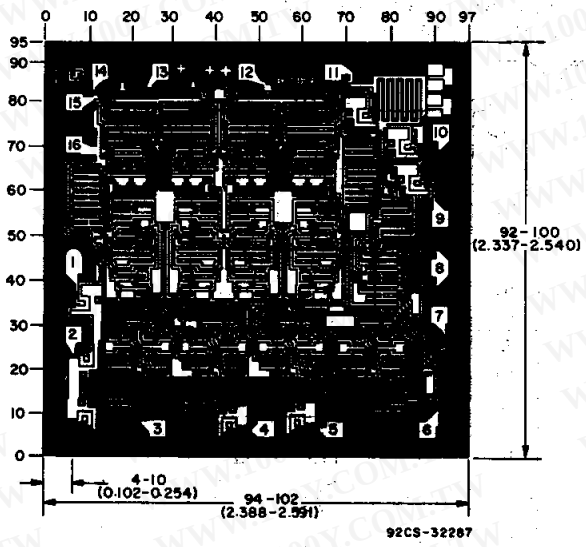

Dimensions and pad layout for CD40194BH

Dimensions in parentheses are in millimeters and are derived from the basic inch dimensions as indicated. Grid graduations are in mils (10^{-3} inch).

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, modifications, enhancements, improvements, and other changes to its products and services at any time and to discontinue any product or service without notice. Customers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All products are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its hardware products to the specifications applicable at the time of sale in accordance with TI's standard warranty. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by government requirements, testing of all parameters of each product is not necessarily performed.

TI assumes no liability for applications assistance or customer product design. Customers are responsible for their products and applications using TI components. To minimize the risks associated with customer products and applications, customers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any TI patent right, copyright, mask work right, or other TI intellectual property right relating to any combination, machine, or process in which TI products or services are used. Information published by TI regarding third–party products or services does not constitute a license from TI to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. Reproduction of this information with alteration is an unfair and deceptive business practice. TI is not responsible or liable for such altered documentation.

Resale of TI products or services with statements different from or beyond the parameters stated by TI for that product or service voids all express and any implied warranties for the associated TI product or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Copyright © 2002, Texas Instruments Incorporated