

**DESCRIPTION**

The CNX48U, H11B1, MOC8080 and TIL113 have a gallium arsenide infrared emitter optically coupled to a silicon planar photodarlington.



<b>CNX48U</b>	<b>H11B1</b>	<b>H11B2</b>	<b>H11B255</b>	<b>H11B3</b>
<b>MOC8080</b>	<b>TIL113</b>			

**FEATURES**

- High sensitivity to low input drive current
- Meets or exceeds all JEDEC Registered Specifications
- VDE 0884 approval available as a test option  
-add option .300. (e.g., H11B1.300)

**APPLICATIONS**

- Low power logic circuits
- Telecommunications equipment
- Portable electronics
- Solid state relays
- Interfacing coupling systems of different potentials and impedances.

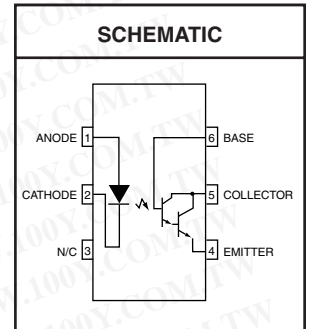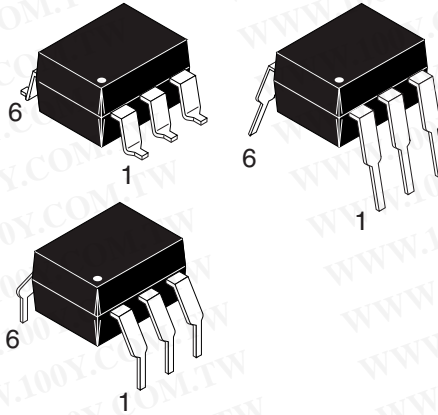

Parameter	Symbol	Device	Value	Units
<b>TOTAL DEVICE</b>				
Storage Temperature	$T_{STG}$	All	-55 to +150	°C
Operating Temperature	$T_{OPR}$	All	-55 to +100	°C
Lead Solder Temperature	$T_{SOL}$	All	260 for 10 sec	°C
Total Device Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	$P_D$	All	250	mW
			3.3	mW/°C
<b>EMITTER</b>				
Continuous Forward Current	$I_F$	All	100	mA
Reverse Voltage	$V_R$	All	6	V
Forward Current - Peak (300 $\mu\text{s}$ , 2% Duty Cycle)	$I_F(pk)$	All	3.0	A
LED Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	$P_D$	All	100	mW
			1.8	mW/°C
<b>DETECTOR</b>				
Collector-Emitter Breakdown Voltage	$BV_{CEO}$	CNX48U, TIL113	30	V
		H11B1, H11B2 H11B3	25	
		H11B255 MOC8080	55	
Collector-Base Breakdown Voltage	$BV_{CBO}$	CNX48U, H11B1 H11B2, H11B3 TIL113	30	V
		H11B255 MOC8080	55	V
Emitter-Collector Breakdown Voltage	$BV_{ECO}$	All	7	V
Detector Power Dissipation @ $T_A = 25^\circ\text{C}$ Derate above 25°C	$P_D$	All	150	mW
			2.0	mW/°C

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

<b>CNX48U</b>	<b>H11B1</b>	<b>H11B2</b>	<b>H11B255</b>	<b>H11B3</b>
<b>MOC8080</b>	<b>TIL113</b>			

**ELECTRICAL CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  Unless otherwise specified.)

**INDIVIDUAL COMPONENT CHARACTERISTICS**

Parameter	Test Conditions	Symbol	Device	Min	Typ**	Max	Unit	
<b>EMITTER</b>								
Input Forward Voltage	( $I_F = 10\text{ mA}$ )	$V_F$	H11B1, H11B2 H11B255 MOC8080 TIL113	0.8	1.2	1.5	V	
	( $I_F = 10\text{ mA}$ )		CNX48U		1.2	1.3		
	( $I_F = 10\text{ mA}$ , $T_A = -55^\circ\text{C}$ )		MOC8080		0.9	1.3		1.7
	( $I_F = 10\text{ mA}$ , $T_A = 100^\circ\text{C}$ )				0.7	1.05		1.4
	( $I_F = 50\text{ mA}$ )		H11B3			1.35		1.5
Reverse Leakage Current	( $V_R = 6\text{ V}$ )	$I_R$	All		0.001	10	$\mu\text{A}$	
Capacitance	( $V_F = 0\text{ V}$ , $f = 1.0\text{ MHz}$ )	C	All		50		pF	
<b>DETECTOR</b>								
Collector-Emitter Breakdown Voltage	( $I_C = 1\text{ mA}$ , $I_F = 0$ )	$BV_{CEO}$	CNX48U	30	60		V	
	( $I_C = 100\ \mu\text{A}$ , $I_F = 0$ )		TIL113					
	( $I_C = 10\text{ mA}$ , $I_F = 0$ )		H11B1, H11B2 H11B3	25	60			
	( $I_C = 100\ \mu\text{A}$ , $I_F = 0$ )		H11B255					
	( $I_C = 1\text{ mA}$ , $I_F = 0$ )		MOC8080					55
Collector-Base Breakdown Voltage	( $I_C = 100\ \mu\text{A}$ , $I_E = 0$ )	$BV_{CBO}$	CNX48U, H11B1 H11B2, H11B3 TIL113	30	100		V	
	( $I_C = 100\ \mu\text{A}$ , $I_F = 0$ )		H11B255 MOC8080					55
Emitter-Collector Breakdown Voltage	( $I_E = 100\ \mu\text{A}$ , $I_B = 0$ )	$BV_{ECO}$	All	7	10		V	
Collector-Emitter Dark Current	( $V_{CE} = 10\text{ V}$ , Base Open)	$I_{CEO}$	All		1	100	nA	

Note

 \*\* Typical values at  $T_A = 25^\circ\text{C}$ 

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**CNX48U H11B1 H11B2 H11B255 H11B3**  
**MOC8080 TIL113**

**TRANSFER CHARACTERISTICS** ( $T_A = 25^\circ\text{C}$  Unless otherwise specified.)

DC Characteristics	Test Conditions	Symbol	Device	Min	Typ**	Max	Units	
Collector Output Current <sup>(1)</sup>	$(I_F = 10 \text{ mA}, V_{CE} = 5 \text{ V})$	$I_C$ (CTR)	MOC8080	50 (500)			mA (%)	
			H11B255	10 (100)				
	$(I_F = 10 \text{ mA}, V_{CE} = 1 \text{ V})$		CNX48U	60 (600)				
			TIL113	30 (300)				
	$(I_F = 1 \text{ mA}, V_{CE} = 5 \text{ V})$		H11B1	5 (500)				
			H11B2	2 (200)				
	$(I_F = 1 \text{ mA}, V_{CE} = 1 \text{ V})$		CNX48U	5 (500)				
$(I_F = 0.5 \text{ mA}, V_{CE} = 1 \text{ V})$	1.75 (350)							
Saturation Voltage	$(I_F = 1 \text{ mA}, I_C = 1 \text{ mA})$	$V_{CE(sat)}$	H11B1, H11B2 H11B3, MOC8080			1.0	V	
	$(I_F = 5 \text{ mA}, I_C = 10 \text{ mA})$		CNX48U			1.0		
	$(I_F = 50 \text{ mA}, I_C = 50 \text{ mA})$		H11B255			1.0		
	$(I_F = 8 \text{ mA}, I_C = 2 \text{ mA})$		TIL113			1.25		
AC Characteristics	$(I_C = 10 \text{ mA}, V_{CE} = 10 \text{ V})$ $(R_L = 100 \Omega)$ (Fig.7)	$t_{on}$	H11B1 H11B2		25		$\mu\text{s}$	
		$t_{off}$	H11B255 H11B3		18			
	$(I_F = 10 \text{ mA}, V_{CC} = 5 \text{ V})$ $(R_E = 100 \Omega), (R_{BE} = 1\text{M}\Omega)$ (Fig. 8)	$t_{on}$	CNX48U		3.5			
		$t_{off}$			36			
	$(I_F = 1 \text{ mA}, V_{CC} = 5 \text{ V})$ $(R_E = 1\text{k}\Omega), (R_{BE} = 10\text{M}\Omega)$ (Fig. 8)	$t_{on}$	MOC8080		70			
		$t_{off}$			190			
	$(I_F = 5 \text{ mA}, V_{CC} = 10 \text{ V})$ $(R_L = 100 \Omega)$ (Fig.7)	$t_{on}$	TIL113		3.5			
		$t_{off}$			25			
	$(I_F = 200 \text{ mA}, I_C = 50 \text{ mA})$ $(V_{CC} = 10 \text{ V}) (R_L = 100 \Omega)$ (Fig.7)	$t_{on}$			0.35	5		
		$t_{off}$			55	100		

**ISOLATION CHARACTERISTICS**

Characteristic	Test Conditions	Symbol	Min	Typ**	Max	Units
Input-Output Isolation Voltage <sup>(2)</sup>	$(I_{I-O} \leq 1 \mu\text{A}, V_{rms}, t = 1 \text{ min.})$		5300			Vac(rms)
Isolation Resistance <sup>(2)</sup>	$(V_{I-O} = 500 \text{ VDC})$	$R_{ISO}$		$10^{11}$		$\Omega$
Isolation Capacitance <sup>(2)</sup>	$(V_{I-O} = \emptyset, f = 1 \text{ MHz})$	$C_{ISO}$		0.8		pf

Note

\*\* Typical values at  $T_A = 25^\circ\text{C}$

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

**CNX48U H11B1 H11B2 H11B25 H11B3**  
**MOC8080 TIL113**

Fig. 1 Output Current vs. Input Current

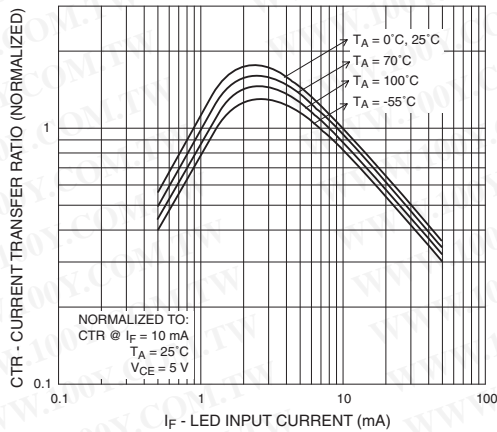


Fig. 2 Current Transfer Ratio vs. Ambient Temperature

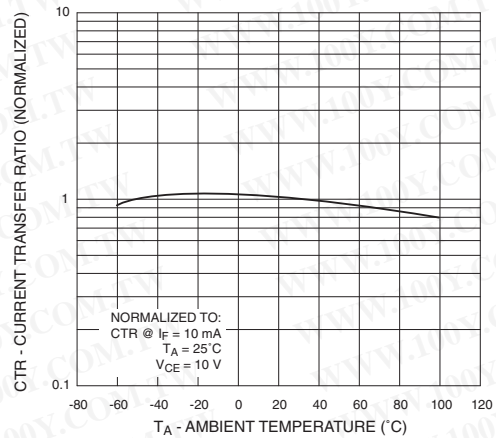


Fig. 3 Collector Current vs. Collector-Emitter Voltage

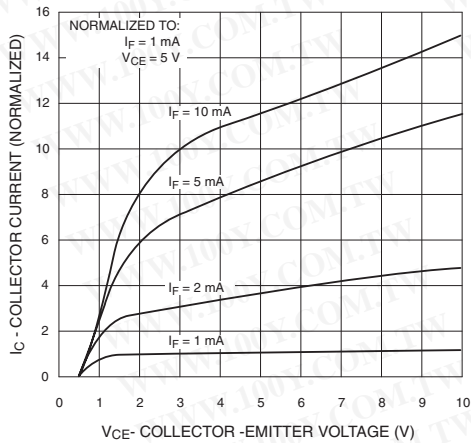


Fig. 4 Dark Current vs. Ambient Temperature

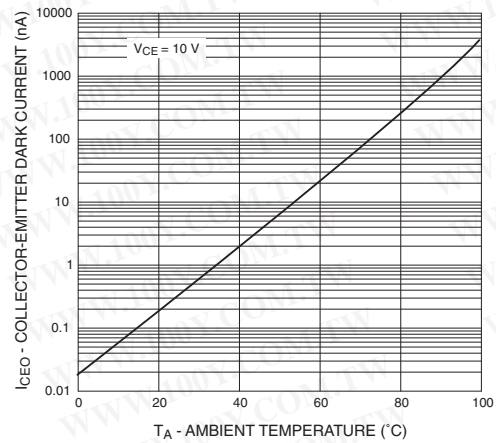


Fig. 5 Turn-On Time vs. Input Current


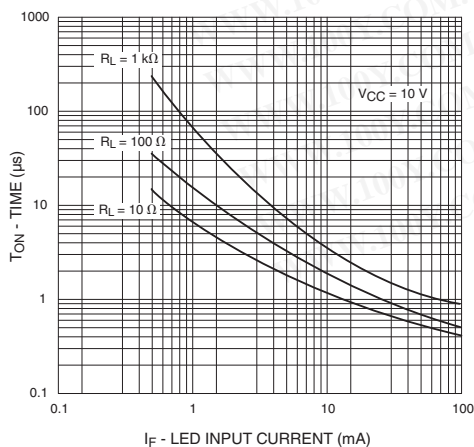


Fig. 6 Turn-Off Time vs. Input Current

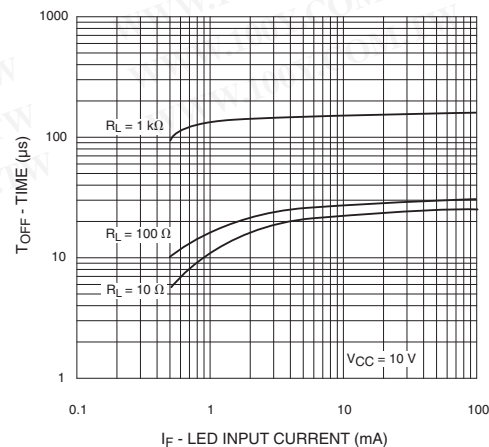


CNX48U H11B1 H11B2 H11B25 H11B3  
MOC8080 TIL113

**TYPICAL ELECTRO-OPTICAL CHARACTERISTIC CURVES**

(25°C Free air temperature unless otherwise specified) (Cont.)


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

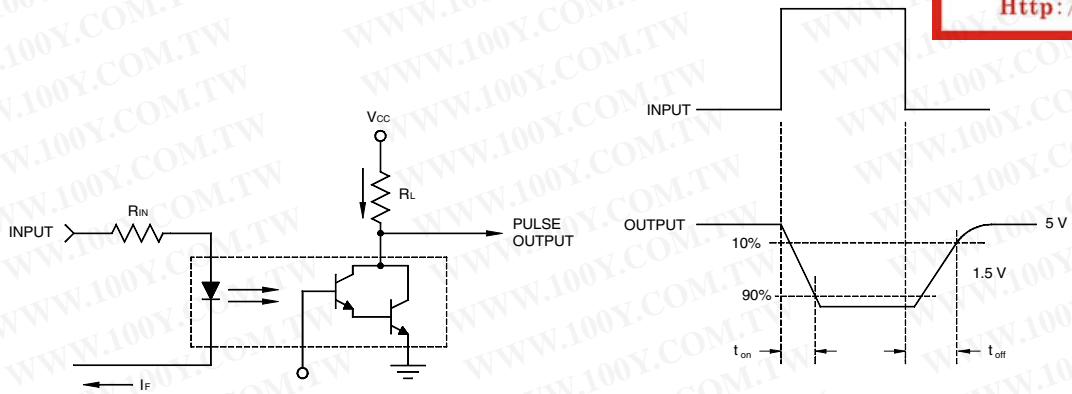

Test Circuit (All devices except CNX48U)

Switching Waveforms (All devices except CNX48U)

Fig. 7 Switching Time Test Circuit and Waveforms (All devices except CNX48U)

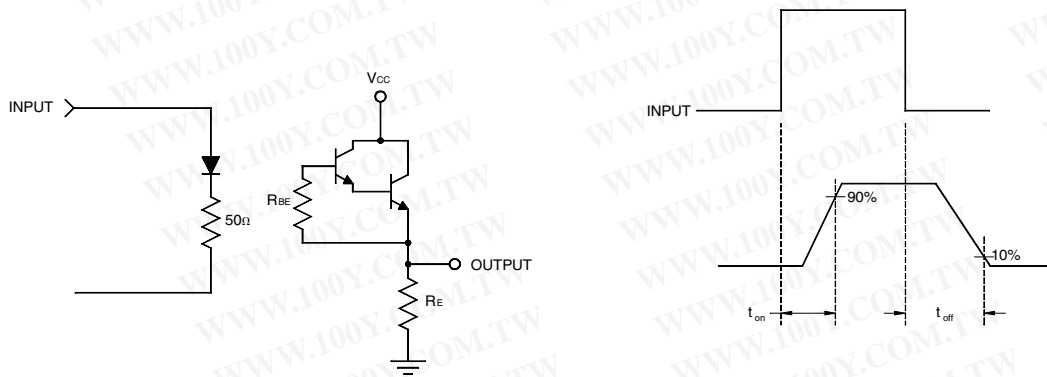

Test Circuit (CNX48U only)

Switching Waveforms (CNX48U only)


Fig. 8 Switching Time Test Circuit and Waveforms (CNX48U only)

Notes


1. The current transfer ratio( $I_C/I_F$ ) is the ratio of the detector collector current to the LED input current with  $V_{CE} @ 10 V$ .
2. For this test, LED pins 1 and 2 are common and phototransistor pins 4,5 and 6 are common.

CNX48U H11B1 H11B2 H11B25 H11B3  
MOC8080 TIL113


**Package Dimensions (Through Hole)**

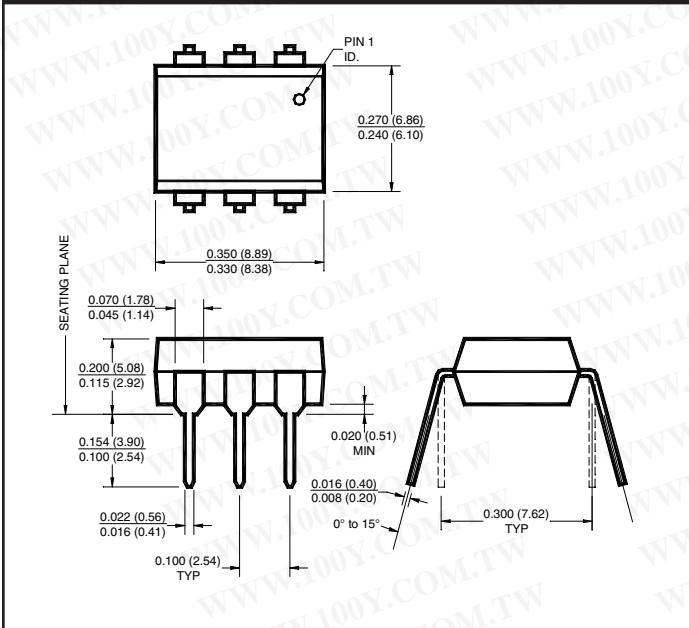


**Package Dimensions (Surface Mount)**

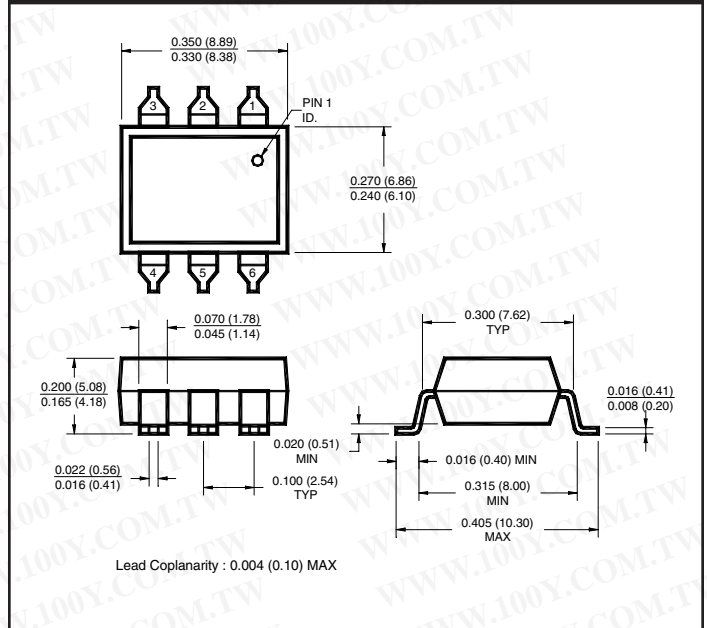

**Package Dimensions (0.4" Lead Spacing)**

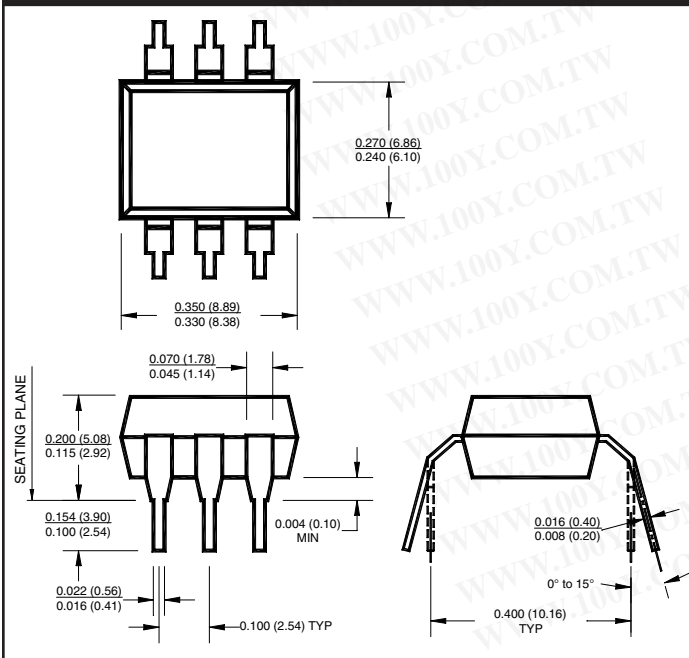

**Recommended Pad Layout for Surface Mount Leadform**

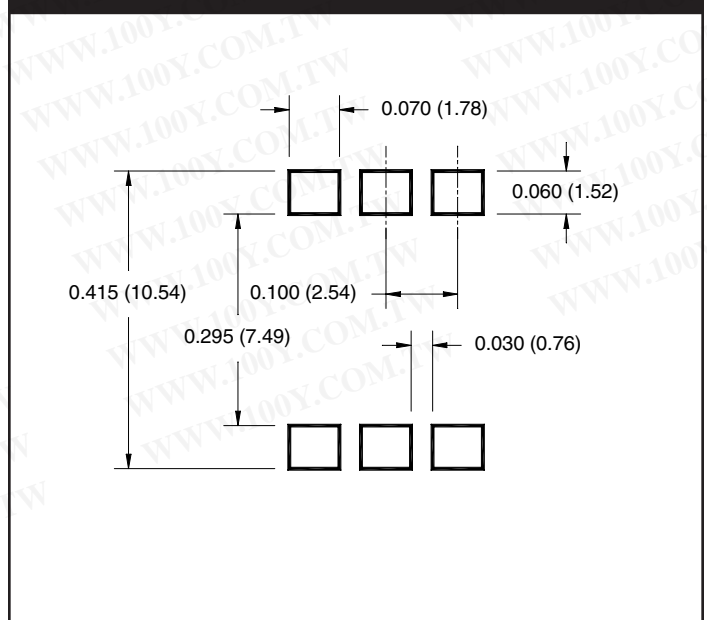

**NOTE**

All dimensions are in inches (millimeters)


勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

CNX48U H11B1 H11B2 H11B255 H11B3  
MOC8080 TIL113

**ORDERING INFORMATION**

Option	Order Entry Identifier	Description
S	.S	Surface Mount Lead Bend
SD	.SD	Surface Mount; Tape and reel
W	.W	0.4" Lead Spacing
300	.300	VDE 0884
300W	.300W	VDE 0884, 0.4" Lead Spacing
3S	.3S	VDE 0884, Surface Mount
3SD	.3SD	VDE 0884, Surface Mount, Tape & Reel

**QT Carrier Tape Specifications ("D" Taping Orientation)**

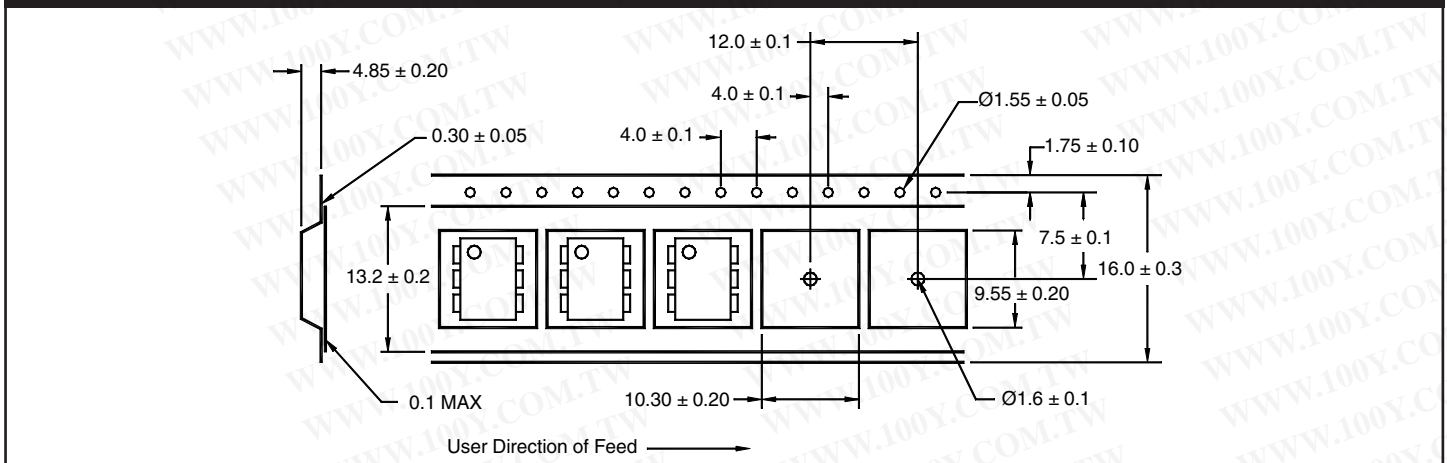

**NOTE**

All dimensions are millimeters

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

## LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

勝特力材料 886-3-5753170  
勝特力电子(上海) 86-21-54151736  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)