特力材料 886-3-5753170 勝 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www. 100y. com. tw

DM74LS14 Hex Inverter with Schmitt Trigger Inputs

ooy.com.

## August 1986 FAIRCHILD **Revised March 2000** SEMICONDUCTOR **DM74LS14** Hex Inverter with Schmitt Trigger Inputs **General Description** This device contains six independent gates each of which performs the logic INVERT function. Each input has hysteresis which increases the noise immunity and transforms a slowly changing input signal to a fast changing, jitter free output.

### **Ordering Code:**


WWW.100Y.COM.T

WWW.100Y.COM

Order Number Package Num		Package Description
DM74LS14M	M14A	14-Lead Small Outline Integrated Circuit (SOIC), JEDEC MS-120, 0.150 Narrow
DM74LS14SJ	M14D	14-Lead Small Outline Package (SOP), EIAJ TYPE II, 5.3mm Wide
DM74LS14N	N14A	14-Lead Plastic Dual-In-Line Package (PDIP), JEDEC MS-001, 0.300 Wide

### **Connection Diagram**

### **Function Table**



Input	Output
Α	Y
LON	Н
Н	L

 $Y = \overline{\Delta}$ 

H = HIGH Logic Level WWW.100Y.COM L = LOW Logic Level

© 2000 Fairchild Semiconductor Corporation DS006353

Http://www. 100y. com. tw

# WWW.100Y.COM.TW WWW.100Y.COM.TW DM74L WWW.100Y.

#### Absolute Maximum Ratings(Note 1)

Supply Voltage	7V	
Input Voltage	7V	
Operating Free Air Temperature Range	0°C to +70°C	
Storage Temperature Range	-65°C to +150°C	

WW.100Y.COM.T

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the Electrical Characteristics tables are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation. WWW.100

### **Recommended Operating Conditions**

Symbol	Parameter	Min	Nom	Max	Unit
V <sub>CC</sub>	Supply Voltage	4.75	5	5.25	V
V <sub>T+</sub>	Positive-Going Input Threshold Voltage (Note 2)	1.4	1.6	1.9	V
V <sub>T-</sub>	Negative-Going Input Threshold Voltage (Note 2)	0.5	0.8	1.	V
HYS	Input Hysteresis (Note 2)	0.4	0.8		V
I <sub>OH</sub>	HIGH Level Output Current	Jun al		-0.4	mA
I <sub>OL</sub>	LOW Level Output Current	M.	-	8	mA
T <sub>A</sub>	Free Air Operating Temperature	0		70	°C

### **Electrical Characteristics**


Symbol	Parameter	Conditions	Min	Typ (Note 3)	Max	Units
VI	Input Clamp Voltage	$V_{CC} = Min, I_I = -18 \text{ mA}$	Vn.		-1.5	V
V <sub>OH</sub>	HIGH Level Output Voltage	V <sub>CC</sub> = Min, I <sub>OH</sub> = Max V <sub>IL</sub> = Max	2.7	3.4	NN	V
V <sub>OL</sub>	LOW Level Output Voltage	V <sub>CC</sub> = Min, I <sub>OL</sub> = Max V <sub>IH</sub> = Min	OM.	0.35	0.5	v
	N.100 CONT.	$V_{CC} = Min, I_{OL} = 4 mA$	07	0.25	0.4	MM.
HT+	Input Current at Positive-Going Threshold	$V_{CC} = 5V, V_I = V_{T+}$	COM	-0.14		mA
lτ_	Input Current at Negative-Going Threshold	$V_{CC} = 5V, V_{I} = V_{T-}$	N.CO	-0.18		mA
4	Input Current @ Max Input Voltage	$V_{CC} = Max, V_I = 7V$		Nr.	0.1	mA
III 📢	HIGH Level Input Current	$V_{CC} = Max, V_I = 2.7V$	NY.	T	20	μA
IIL	LOW Level Input Current	$V_{CC} = Max, V_I = 0.4V$	-1 C	DNY.	-0.4	mA
los	Short Circuit Output Current	V <sub>CC</sub> = Max (Note 4)	-20	1.1	-100	mA
ICCH	Supply Current with Outputs HIGH	V <sub>CC</sub> = Max	1	8.6	16	mA
I <sub>CCL</sub>	Supply Current with Outputs LOW	V <sub>CC</sub> = Max	100 2	12	21	mA

### **Switching Characteristics**


	' and T <sub>A</sub> = 25°C	$R_L = 2 k\Omega$				
Symbol	Parameter	C <sub>L</sub> =	C <sub>L</sub> = 15 pF		C <sub>L</sub> = 50 pF	
		Min	Max	Min	Max	
t <sub>PLH</sub>	Propagation Delay Time LOW-to-HIGH Level Output	5	22	8	25	ns
PHL	Propagation Delay Time HIGH-to-LOW Level Output	5	22	10	33	ns

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787

Http://www.100y.com.tw

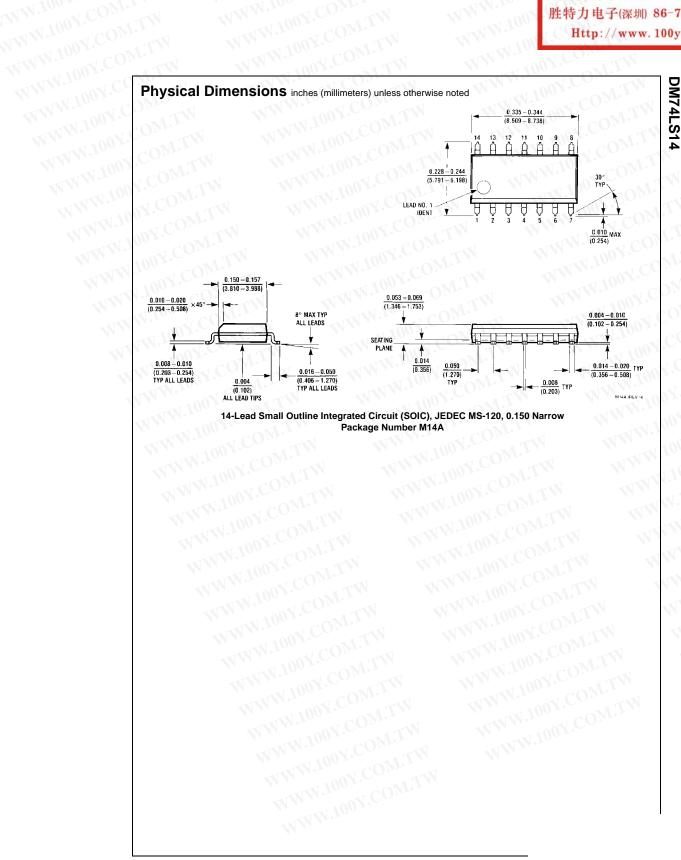

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

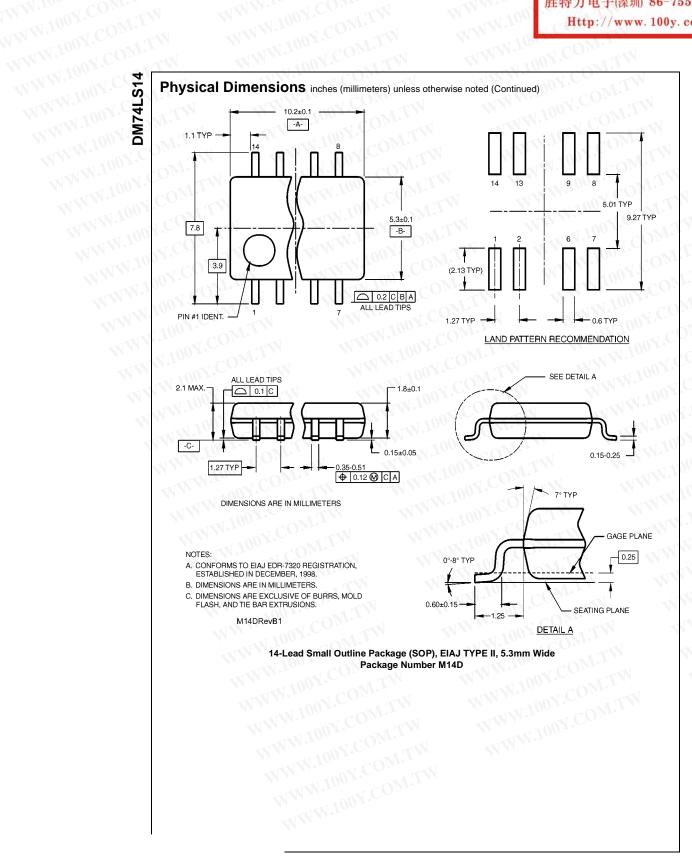

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787

Http://www. 100y. com. tw

