

Photomicrosensor

EE-SX670(A)/
470






Photomicrosensor with 100-mA Switching Capacity that can be Built into Equipment

- Standard, L-shaped, T-shaped, and close mounting: 5-series models available.
- Select from fifteen output variations, including Light-ON or Light-OFF/ON models.
- Response frequency as high as 1 kHz.
- Easy operation monitoring with bright light indicator.
- Wide operating voltage range (5 to 24 VDC) makes smooth connection of the photomicrosensor with TTLs, relays, and programmable controllers (PC) possible.
- Dust-proof slit.
- EE-SX670A/671A/672A/673A/674A models come with a Light-OFF indicator, which lights when an object is detected.



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Ordering Information

Appearance	Sensing method	Sensing distance	Output configuration	Model	Weight
Standard 	Transmissive type (channel-type)	5 mm (channel width)	Light-OFF/ON (see note 1)	*EE-SX670	Approx. 3.1 g
			Light-ON	*EE-SX470	
L-shaped 			Light-OFF/ON (see note 1)	*EE-SX671	Approx. 3.0 g
			Light-ON	*EE-SX471	
T-shaped 			Light-OFF/ON (see note 1)	*EE-SX672	Approx. 2.4 g
			Light-ON	*EE-SX472	
Close-mounting 			Light-OFF/ON (see note 1)	*EE-SX673	Approx. 2.3 g
			Light-ON	*EE-SX473	
Close-mounting 			Light-OFF/ON (see note 1)	EE-SX674	Approx. 3.0 g
			Light-OFF/ON (see note 1)	EE-SX674A (see note 2)	
	Light-ON	EE-SX474			

- Note:**
1. The Light-OFF/ON models can be used as Light-ON models when the L terminal and positive (+) terminal are short-circuited. A L terminal and positive (+) terminal short circuit Connector (EE-1001-1) is available.
 2. These models are fitted with a LIGHT OFF indicator light.


Specifications

■ Ratings

Item	Standard	L-shaped	T-shaped	Close-mounting
	EE-SX670(A), EE-SX470	EE-SX671(A), EE-SX471	EE-SX672(A), EE-SX472	EE-SX673(A), EE-SX473, EE-SX674(A), EE-SX474
Supply voltage	5 to 24 VDC \pm 10%, ripple (p-p): 10% max.			
Current consumption	35 mA max.			
Standard reference object	Opaque: 2 x 0.8 mm			
Sensing distance	5 mm			
Differential distance	0.025 mm			
Control output	At 5 to 24 VDC: 100-mA load current (I_C) with a residual voltage of 0.8 V max. 40-mA load current (I_C) with a residual voltage of 0.4 V max.			
Indicator (see note 1)	Light indicator (red)			
Response frequency (see note 2)	1 kHz max. (3 kHz average)			
Connecting method	Dedicated connectors: EE-1009/1006(A)/1010/1001-01/1001; direct soldering			
Light source	GaAs infrared LED with a peak wavelength of 940 nm			
Receiver	Si phototransistor with a sensing wavelength of 850 nm max.			

Note: 1. The indicator is GaP red LED (peak emission wavelength: 690 nm).

2. The response frequency was measured by detecting the following rotating disks.



■ Characteristics


Ambient illumination (see note)	Fluorescent light: 1,000 lx max.
Enclosure ratings	IEC IP50
Ambient temperature	Operating: -25° to 55° C Storage: -30° to 80° C
Ambient humidity	Operating: 5% to 85% Storage: 5% to 95%
Vibration resistance	Destruction: 20 to 2,000 Hz, (with a peak acceleration of 10G), 1.5-mm double amplitude for 2 hrs (with 4-minute cycles) each in X, Y, and Z directions
Shock resistance	Destruction: 500 m/s ² (approx. 50G) for 3 times each in X, Y, and Z directions
Soldering heat resistance	260 \pm 5 $^{\circ}$ C when the portion between the tip of the terminals and the position 1.5 mm from the terminal base is dipped into the solder for 10 \pm 1 seconds
Material	Case: Polybutylene phthalate (PBT), Cover: Polycarbonate (PC), Emitter/receiver: Polycarbonate (PC)

Note: The ambient illuminance is measured on the surface of the receiver.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Engineering Data

Sensing Position Characteristics (Typical)

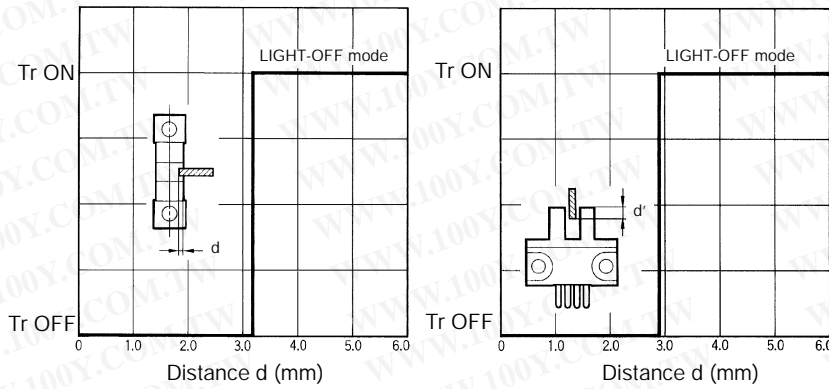

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Repeated Sensing Position Characteristics (Typical)

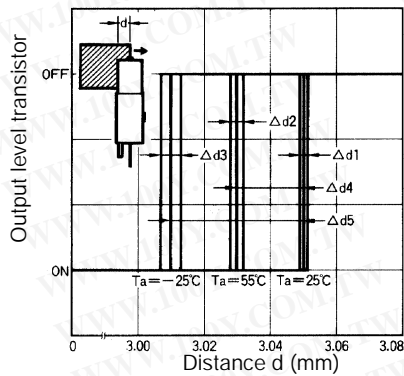


$V_{CC} = 12\text{ V}$
 No. of repetitions: 20
 $nd_1 = 0.002\text{ mm}$
 $nd_2 = 0.004\text{ mm}$
 $nd_3 = 0.005\text{ mm}$
 $nd_4 = 0.02\text{ mm}$
 $nd_5 = 0.04\text{ mm}$

Operation

Output Circuit Diagrams

EE-SX670, -SX671, -SX672, -SX673, -SX674


Light ON/OFF

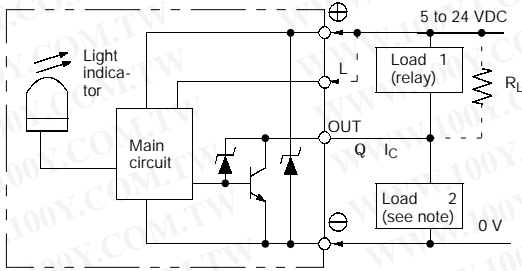

Note: When using on voltage output, always insert a resistor in RL and use load 2.

EE-SX470, -SX471, -SX472, -SX473, -SX474


Light ON

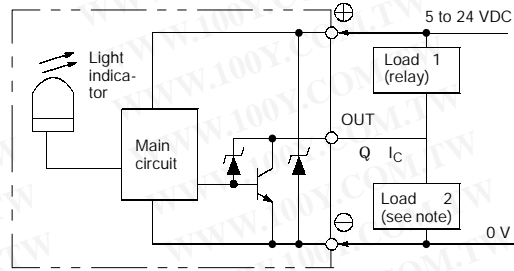

Note: Voltage output (when the sensor is connected to a transistor circuit).

EE-SX670A, -SX671A, -SX672A, -SX673A, -SX674A

Light ON/OFF

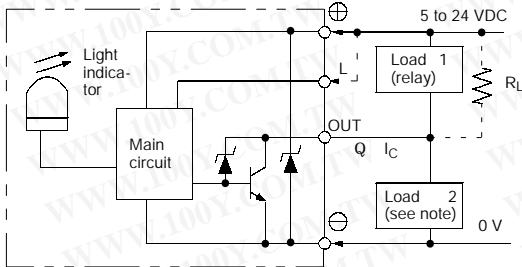

Note: When using on voltage output, always insert a resistor in RL and use load 2.


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Timing Chart

EE-SX670, -SX671, -SX672, -SX673, -SX674


Light ON

(When terminals L and ⊕ are short-circuited)




Light OFF

(When terminals L and ⊕ are open)



EE-SX470, -SX471, -SX472, -SX473, -SX474


Light ON



EE-SX670A, -SX671A, -SX672A, -SX673A, -SX674A


Light ON

(When terminals L and ⊕ are short-circuited)



Light OFF



(When terminals L and ⊕ are open)



Dimensions

Note: All units are in millimeters unless otherwise indicated.

EE-SX670
EE-SX670A
EE-SX470

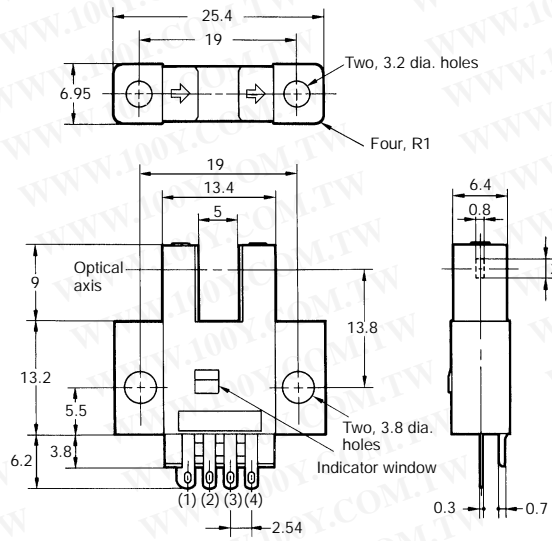



勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Terminal Arrangement

(1)	⊕	Vcc
(2)	L	L (see note)
(3)	OUT	OUT PUT
(4)	⊖	GND (0 V)

Note: EE-SX470 is a vacant terminal

EE-SX671
EE-SX671A
EE-SX471

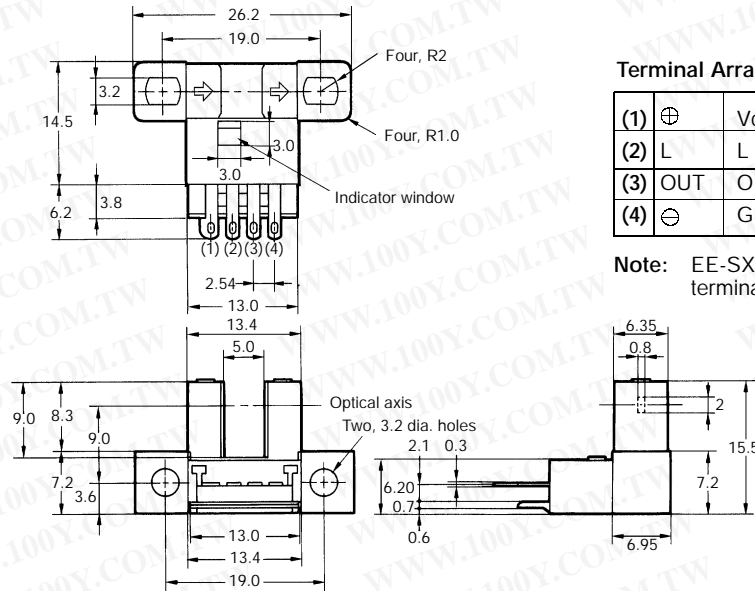



Terminal Arrangement

(1)	⊕	Vcc
(2)	L	L (see note)
(3)	OUT	OUT PUT
(4)	⊖	GND (0 V)

Note: EE-SX471 is a vacant terminal

EE-SX672
EE-SX672A
EE-SX472





Terminal Arrangement

(1)	⊕	Vcc
(2)	L	L (see note)
(3)	OUT	OUT PUT
(4)	⊖	GND (0 V)

Note: EE-SX472 is a vacant terminal



EE-SX673
EE-SX673A
EE-SX473

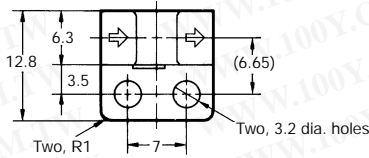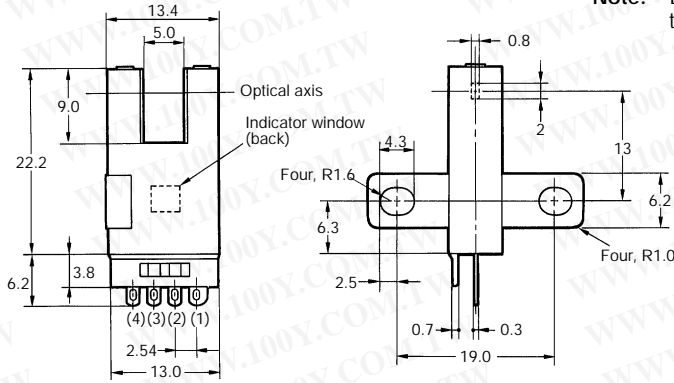

Terminal Arrangement


(1)	⊕	Vcc
(2)	L	L (see note)
(3)	OUT	OUT PUT
(4)	⊖	GND (0 V)

Note: EE-SX473 is a vacant terminal

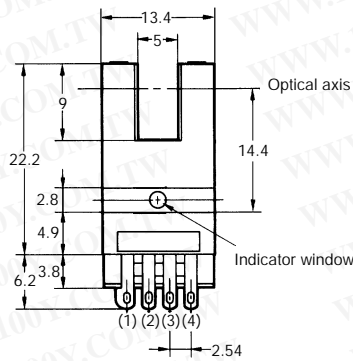

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

EE-SX674
EE-SX674A
EE-SX474

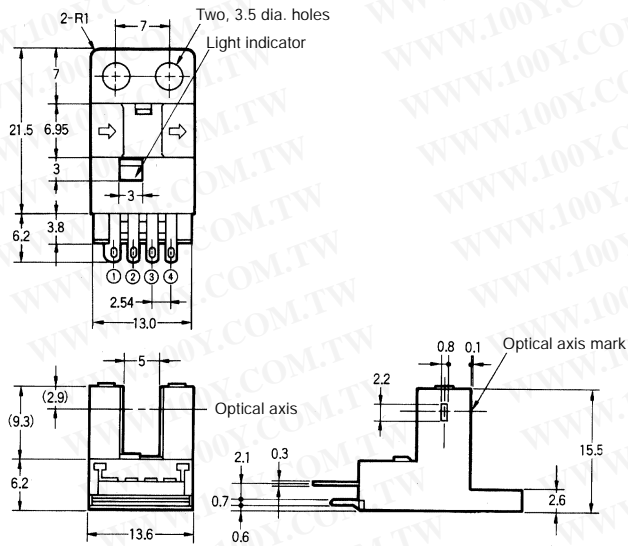

Terminal Arrangement

(1)	⊕	Vcc
(2)	L	L (see note)
(3)	OUT	OUT PUT
(4)	⊖	GND (0 V)

Note: EE-SX474 is a vacant terminal

Applicable Connectors

EE-1009, EE-1010, EE-1001-1, EE-1001, EE-1006, EE-1006A
Refer to page 70 for details.

Precautions

Refer to page NO TAG, *Precautions* in *Technical Information*, for general precautions.

When direct soldering to the terminal, use the following guidelines.

Soldering Conditions

Item	Temperature	Permissible time	Remarks
Soldering Iron	350°C max.	3 sec max.	The portion between the base of the terminals and the position 1.5 mm from the terminal base must not be soldered.

The terminal base uses a polycarbonate resin, which could be deformed by excessive soldering heat.

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw