
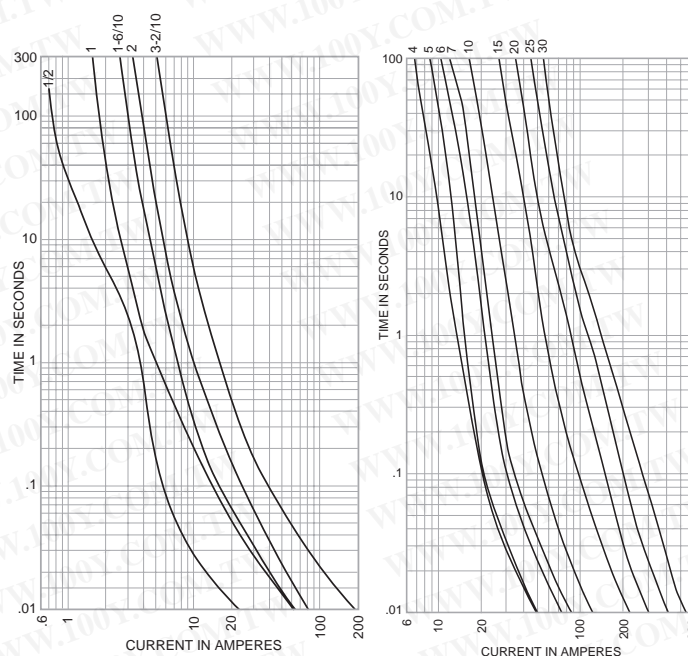


Tron® Time-Delay Fuses

13/32" x 1-1/2" Midget**500 Volt, 1/10-30 Amps**

- Fibre tube.
- Nickel plated brass endcaps.
- For motor control transformers and other circuits with in-rush currents.

Time-Current Characteristic Curve—Average Melt

RMS SYMMETRICAL IN AMPERES

Catalog Symbol: FNQ (5AG)

TIME-DELAY

1/10 TO 30A

500Vac (OR LESS)

Interrupting Rating: 10,000A

UL LISTED, STD 248-14, (GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED (CLASS 1422-01; FILE 53787)

Catalog Symbol and Ampere Ratings


| | | | |
|------------|------------|------------|--------|
| FNQ-1/10 | FNQ-8/10 | FNQ-3-2/10 | FNQ-9 |
| FNQ-1/8 | FNQ-1 | FNQ-3-1/2 | FNQ-10 |
| FNQ-15/100 | FNQ-1-1/8 | FNQ-4 | FNQ-12 |
| FNQ-3/16 | FNQ-1-1/4 | FNQ-4-1/2 | FNQ-14 |
| FNQ-2/10 | FNQ-1-1/2 | FNQ-5 | FNQ-15 |
| FNQ-1/4 | FNQ-1-6/10 | FNQ-5-6/10 | FNQ-20 |
| FNQ-3/10 | FNQ-2 | FNQ-6 | FNQ-25 |
| FNQ-4/10 | FNQ-2-1/4 | FNQ-6-1/4 | FNQ-30 |
| FNQ-1/2 | FNQ-2-1/2 | FNQ-7 | — |
| FNQ-6/10 | FNQ-3 | FNQ-8 | — |

Carton Quantity and Weight

| Ampere Ratings | Carton Qty | Weight* Lbs. | Kg. |
|----------------|------------|-----------------|------|
| 1-30 | 10 | .180 | .082 |

* Weight per carton.

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

- 
- Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses
 See Data Sheets listed below
- Open fuseblocks - 1104, 2104
 - Finger-safe fuseholders - 1109, 1102, 1103, 1151
 - Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
 - In-line fuseholders - 2127, 2126

CE

The only controlled copy of this Data Sheet is the electronic read-only version located on the Bussmann Network Drive. All other copies of this Data Sheet are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.