勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

November 1996 **Revised August 2003**

AIRCHIL

WWW.100Y.COM

WWW.100Y.COA

SEMICONDUCTORIN

NC7SZ66 TinyLogic® Low Voltage UHS Single SPST **Normally Open Bus Switch**

General Description


The NC7SZ66 is a ultra high-speed (UHS) CMOS compatible single-pole/single-throw (SPST) bus switch. The LOW On Resistance of the switch allows inputs to be connected to outputs with minimal propagation delay and without generating additional ground bounce noise. The device is organized as a 1-bit switch with a switch enable (OE) signal. When OE is HIGH, the switch is on and Port A is connected to Port B. When OE is LOW, the switch is open and a high-impedance state exists between the two ports.

Features


- Space saving SOT23 or SC70 5-lead package
- Ultra small MicroPak[™] leadless package
- Broad V_{CC} Operating Range 1.65V–5.5V
- Rail-to-rail signal handling
- **Ξ** 5Ω switch connection between two ports Minimal propagation delay through the switch
- Low I_{CC}
- Zero bounce in flow-through mode
- Control input compatible with CMOS input levels

Ordering Code:

Order Number	Package Number	Product Code Top Mark	Package Description	Supplied As
NC7SZ66M5X	MA05B	7Z66	5-Lead SOT23, JEDEC MO-178, 1.6mm	3k Units on Tape and Reel
NC7SZ66P5X	MAA05A	Z66	5-Lead SC70, EIAJ SC-88a, 1.25mm Wide	3k Units on Tape and Reel
NC7SZ66L6X	MAC06	EE	6-Lead MicroPak, 1.0mm Wide	5k Units on Tape and Reel



Connection Diagrams

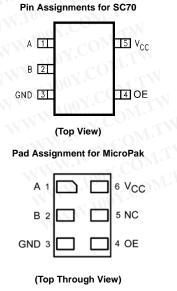

Pin Descriptions

Pin Names	Description
OE	Switch Enable Input
A	Bus A I/O
В	Bus B I/O
NC 🕥	No Connect

Function Table

	OE	B ₀	Function
	L	HIGH-Z State	Disconnect
	Н	A ₀	Connect
TinyLog	ic® is a registered tr	ademark of Fairchild	Semiconductor Co



© 2003 Fairchild Semiconductor Corporation DS012177 WWW.100Y

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www. 100y. com. tw

WWW.100Y.COM.TW WWW.100Y.COM.TW NC7SZ66

Absolute Maximum Ratings(Note 1)

WWW.100Y.COM.T

Recommended Operating	
Conditions (Note 3)	

WWW.100Y

Supply Voltage (V _{CC})	-0.5V to +7.0V	Con
DC Switch Voltage (V _S)	-0.5V to V _{CC} +0.5V	Powe
DC Input Voltage (VIN) (Note 2)	-0.5V to +7.0V	Contro
DC Input Diode Current		Switch
(I _{IK}) V _{IN} < 0V	–50 mA	Switch
DC Output (I _{OUT}) Sink Current	128 mA	Input
DC V _{CC} /GND Current (I _{CC} /I _{GND})	±100 mA	Cor
Storage Temperature Range		Cor
(T _{STG})	-65°C to +150°C	Swi
Junction Lead Temperature		Opera
under Bias (T _J)	+150°C	Thern
Junction Lead Temperature (TL)		so
(Soldering, 10 Seconds)	+260°C	SC
Power Dissipation (P _D) @ +85°C		Note 1:
SOT23-5	200 mW	the safe operated
SC70-5	150 mW	Characte The "Re for actua
		Note 2: the input
		Note 3:

Conditions (Note 3)	WEAR
Power Supply Operating (V _{CC})	1.65V to 5.5V
Control Input Voltage (VIN)	0V to 5.5V
Switch Input Voltage (VIN)	0V to V _{CC}
Switch Output Voltage (VOUT)	OV to V _{CC}
Input Rise and Fall Time (t _r , t _f)	1. M.I.V
Control Input; V _{CC} = 2.3V–3.6V	0 ns/V to 10 ns
Control Input; V _{CC} = 4.5–5.5V	0 ns/V to 5 ns
Switch I/O	0 ns/V to DC
Operating Temperature (T _A)	-40°C to +85°C
Thermal Resistance (θ _{JA})	100 1. COM
SOT23-5	300°C/Watt
SC70-5	425°C/Watt

The "Absolute Maximum Ratings" are those values beyond which ety of the device cannot be guaranteed. The device should not be ed at these limits. The parametric values defined in the Electrical cteristics tables are not guaranteed at the absolute maximum ratings. ecommended Operating Conditions" table will define the conditions al device operation.

Note 2: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.

	100 r	V _{cc}	T _A = -	-40°C to +	-85°C		A = +25°	С		I.W.W
Symbol	Parameter	(V)	Min	Typ (Note 5)	Max	Min	Тур	Мах	Units	Conditions
VIH	HIGH Level	1.65 to 1.95	$0.75 \ V_{CC}$	NN		NY.		1TA	v	WI
	Input Voltage	2.3 to 5.5	0.7 V _{CC}		1.1/1		CO	N		W
VIL	LOW Level	1.65 to 1.95		N	0.25 V _{CC}	100		111	v	N. I.
	Input Voltage	2.3 to 5.5	T		0.3 V _{CC}		d C) Mar	v	W
I _{IN}	Control Input Leakage Current	0 to 5.5		±0.05	±1.0	1.100	v C	OM.	μA	$0 \le V_{IN} \le 5.5V$
OFF	OFF Leakage Current	1.65 to 5.5	14	±0.05	±10.0	x110	0 >		μA	$0 \le A, B \le V_{CC}$
R _{ON}	Switch On Resistance	U.S.	A V	3	7		~~ ·	CO.	- 11	$V_{IN} = 0V, I_{IN} = 30 \text{ mA}$
	(Note 4)	4.5		5	12	1.1.1	00	- CO	1.1	$V_{IN} = 2.4V, I_{IN} = 15 \text{ mA}$
	VAC. NO	COr	A V	7	15		100			$V_{IN} = 4.5V$, $I_{IN} = 30$ mA
	N.100	3.0		4	9	NIN	To.	-16	<u>.</u>	V _{IN} = 0V, I _{IN} = 24 mA
	WW TOO	3.0	NT N	10	20		1100	1.	Ω	$V_{IN} = 3V$, $I_{IN} = 24$ mA
	W.IV	2.3	1.1.1	5	12	INN	N	~1	ON:	$V_{IN} = 0V$, $I_{IN} = 8$ mA
	WW 10	2.5	1.10	13	30		11	0		$V_{IN} = 2.3V, I_{IN} = 8 \text{ mA}$
	WW.L	1.8	11-1	7	28	NIN	A 4	1	CO	$V_{IN} = 0V$, $I_{IN} = 4$ mA
		1.0	A.	25	60			00	0	$V_{IN} = 1.8V$, $I_{IN} = 4 \text{ mA}$
R _{flat}	On Resistance Flatness	5.0		W			6			$I_A = -30 \text{ mA}, \ 0 \le V_{Bn} \le V$
	(Note 4)(Note 6)(Note 7)	3.3	AON.				12	100	Ω	$I_A = -24 \text{ mA}, \ 0 \le V_{Bn} \le V$
	WW V	2.5		NT.		N	28	1100	32	$I_A = -8 \text{ mA}, \ 0 \leq V_{Bn} \leq V_C$
	View	1.8	(O)	1.	* 1		125	N.2	1	$I_A = -4 \text{ mA}, 0 \le V_{Bn} \le V_C$
I _{CC}	Quiescent Supply Current	1.65 to 5.5		0.05	10			W.10	μΑ	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0$

Note 4: Measured by the voltage drop between A and B pins at the indicated current through the switch. On Resistance is determined by the lower of the voltages on the two (A or B) pins.

Note 5: All typical values are at the specified V_CC, and $T_A=25^\circ C.$ Note 6: Parameter is characterized but not tested in production.

Note 7: Flatness is defined as the difference between the maximum and minimum value of On Resistance over the specified range of conditions.

WWW.100Y.COM.TV

AC EI	ectrical Character	ristics	N.TV M.T M.T	N TN TN	M	NMN NMN MMN	胜特力电 胜特力电 Http	
OW.	N WAW	1001	T _A =	= -40°C to +	85°C,	N.V	1001.00	M.T.N
Symbol	Parameter	V _{cc}	C _L = 50) pF, RU= RI) = 500 Ω	Units	Conditions	Figure
COM		(V)	Min	Typ (Note 8)	Max		WW.100 Y C	Number
t _{PHL} , t _{PLH}	Propagation Delay Bus to Bus	1.65 to 1.95		T.Mo	4.3		100	-0N.3
	(Note 9)	2.3-2.7	V.C	U.S.	1.2	ns	V _{IN} = OPEN	Figures
1.0	1.1	3.0-3.6	0.21	-MA	0.8	ns	.10°	1, 2
	VI VI	4.5-5.5	No.		0.3	ns		
t _{PZL} , t _{PZH}	Output Enable Time	1.65 to 1.95	1.5	7.0	14.2		.War	AT CON
N.C.	1 1/17.	2.3-2.7	1.5	3.3	7.0	ns	$V_{IN} = 2 \times V_{CC}$ for t_{PZL}	Figures
	DN.	3.0-3.6	1.5	2.4	5.5	ns	$V_{IN} = 0V$ for t_{PZH}	1, 2
	WT	4.5-5.5	1.5	2.0	4.5	ns		0
t _{PLZ} , t _{PHZ}	Output Disable Time	1.65 to 1.95	1.5	9.2	18.2	N	NW.	1.0
11001	VI.M.	2.3-2.7	1.5	5.3	9.0	ns	V _{IN} = 2 x V _{CC} for t _{PLZ}	Figures
1.10	COM	3.0-3.6	1.5	4.0	7.0	ns	$V_{IN} = 0V$ for t_{PHZ}	1, 2
		4.5-5.5	1.5	2.7	5.0	ns		


Note 8: All typical values are at the specified V_{CC} , and $T_A = 25^{\circ}C$.

Note 9: This parameter is guaranteed by design but is not tested. The switch contributes no propagation delay other than the RC delay of the typical On WWW.100 Resistance of the switch and the 50 pF load capacitance, when driven by an ideal voltage source (zero output impedance). Jai VO

Capacitance

	Parameter	Тур	Max	Units	Conditions
C _{IN}	Control Pin Input Capacitance	2	Too.	pF	$V_{CC} = 0V$
CI/O	Input/Output Capacitance	6		pF	$V_{CC} = 5.0V$

勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

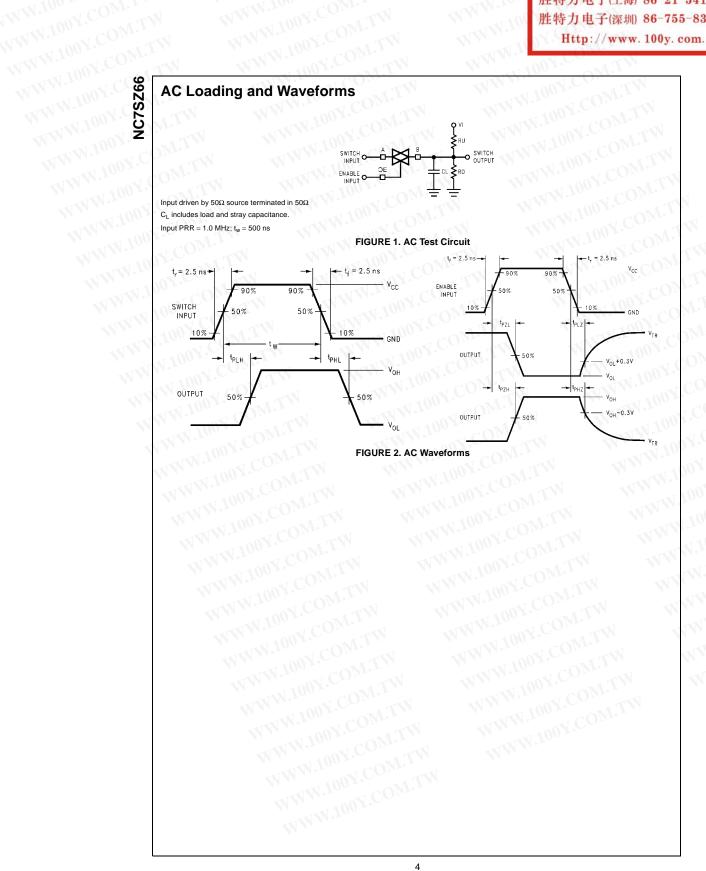


WWW.100Y 勝特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw


W.100Y.COM.TW

WW.100Y.COM.TW

			胜特力国	电于(上海) 86 电子(深圳) 86 :://www.100
TAPE FORMAT FOR		ATW Y	WWW.100Y	Y.COM.TW
Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status
	Leader (Start End)	125 (typ)	Empty	Sealed
				Cooled
M5X, P5X	Carrier	3000	Filled	Sealed

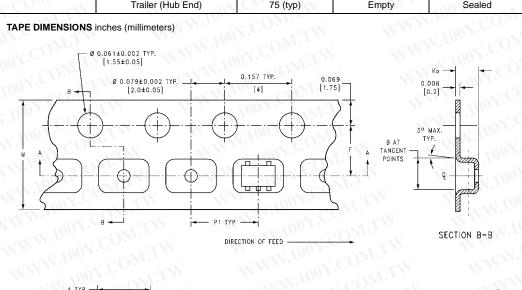



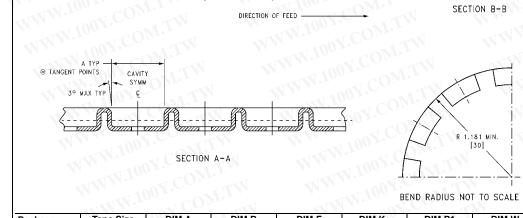



Package	Tape Size	DIM A	DIM B	DIM F		DIM P1	DIM W
0070 5		0.093	0.096	0.138 ± 0.004	0.053 ± 0.004	0.157	0.315 ± 0.004
SC70-5	8 mm	(2.35)	(2.45)	(3.5 ± 0.10)	(1.35 ± 0.10)	(4)	(8 ± 0.1)
SOT23-5	9 mm	0.130	0.130	0.138 ± 0.002	0.055 ± 0.004	0.157	0.315 ± 0.012
50123-5	8 mm	(3.3)	(3.3)	(3.5 ± 0.05)	(1.4 ± 0.11)	(4)	(8 ± 0.3)

特力材料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www. 100y. com. tw

WW.1001.COM.				胜特力	电于(上海) 86-21 电子(深圳) 86-75 p://www.100y.c
		el Specification (Contin MicroPak Tape	nued)	Cavity	Cover Tape
WW.100	Designator	Section	Cavities	Status	Status
W " 100 X.	-M.F	Leader (Start End)	125 (typ)	Empty	Sealed
	L6X	Carrier	5000	Filled	Sealed
	COM.	Trailer (Hub End)	75 (typ)	Empty	Sealed

TAPE DIMENSIONS inches (millimeters)

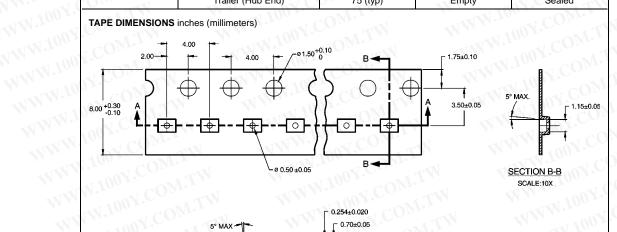


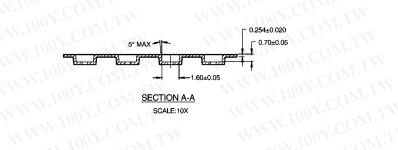

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

NC7SZ66


WWW.100Y.COM.TV

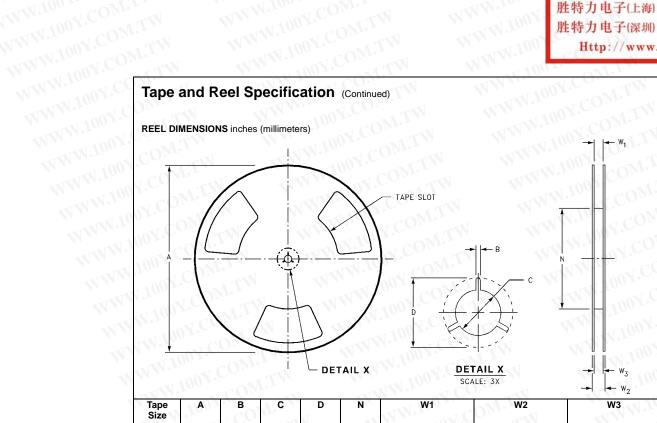

Size	100	$\overline{c}0$	1	N.		WW. P	War III	WWW.
8 mm	7.0	0.059	0.512	0.795		0.331 + 0.059/-0.000		W1 + 0.078/-0.039
0	(177.8)	(1.50)	(13.00)	(20.20)	(55.00)	(8.40 + 1.50/-0.00)	(14.40)	(W1 + 2.00/-1.00)
	W.IV	~1	ON.	- N		WWW.L	COM	MMM
								VIII
W								111
								WW I


特力材料 886-3-5753170 勝 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787

Http://www. 100y. com. tw

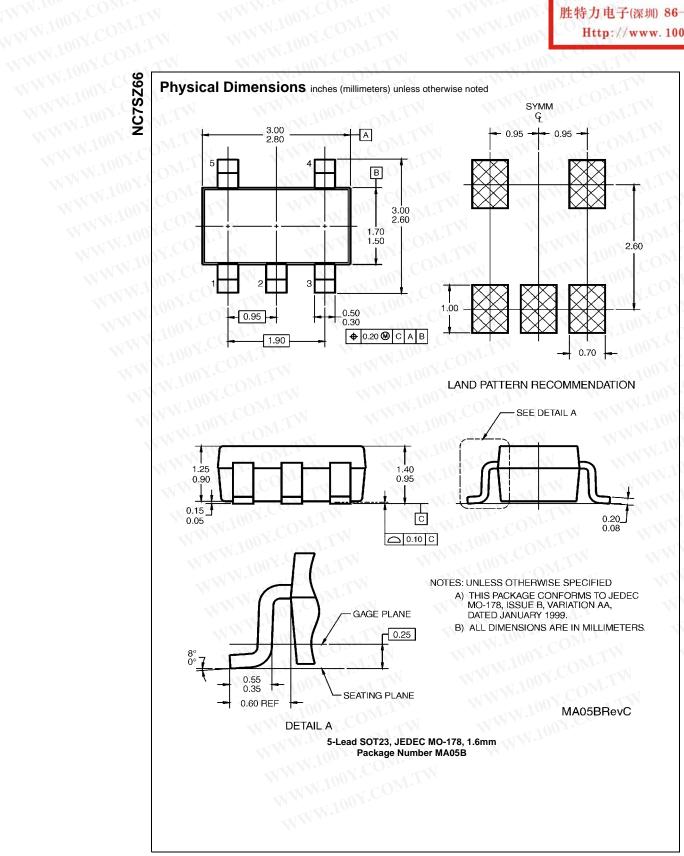


8

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

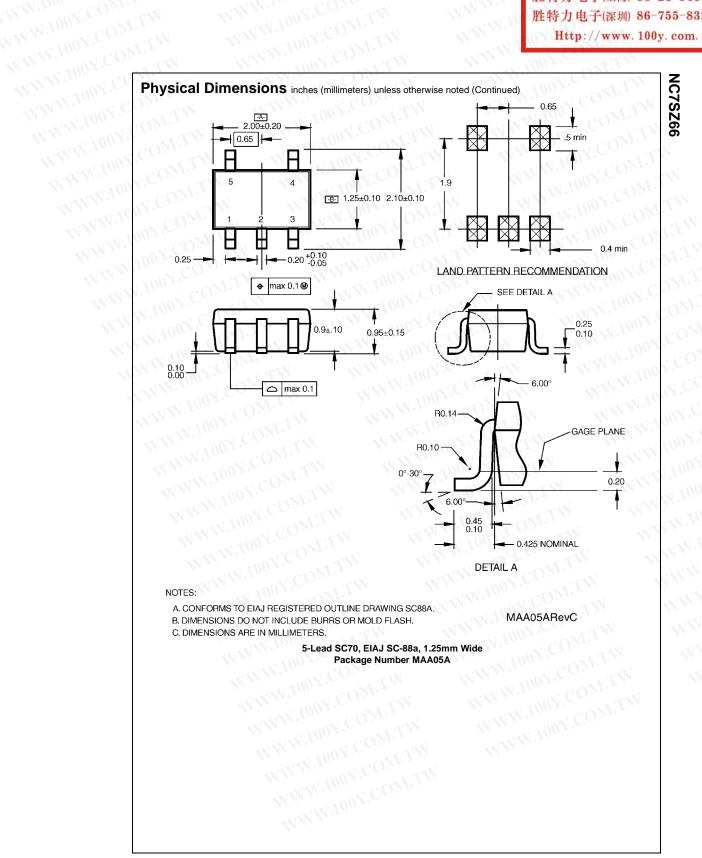

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

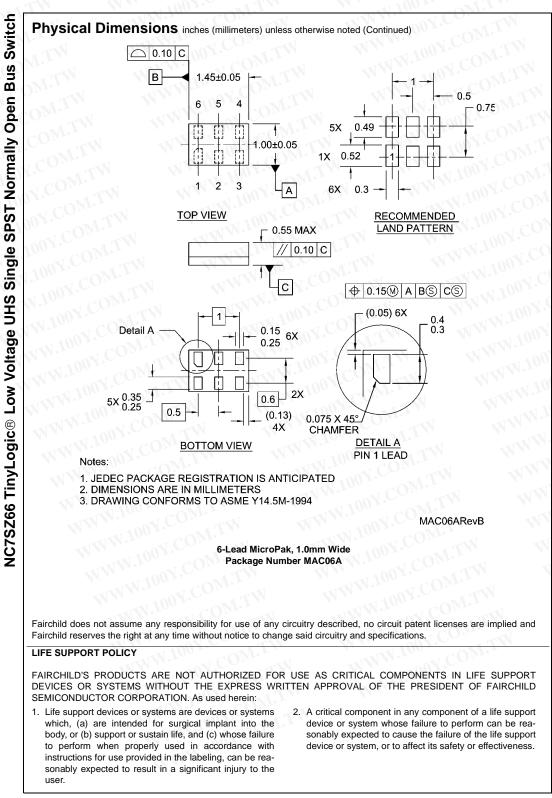

10