

Part No.: RS2W0560-S

Power divider/Combiner 2 Way SMA 50Ω 0.5 to 6.0 GHz

电气特性 Electrical:

工作频率 Frequency Range: 0.5-6.0GHz

插入损耗 Insertion Loss: $\leq 1.1\text{dB}$

驻波 VSWR: $\leq 1.30 : 1$ (Max)

隔离 Isolation: $\geq 18\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 0.3\text{dB}$

相位平衡 Phase Balance: $\leq \pm 5^\circ$

耐功率 Power Handling: $\leq 30\text{Watt}$

阻抗 Impedance: 50 OHMS



机械特性 Mechanical:


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%

外形尺寸 Outline Drawing:



Unit: mm

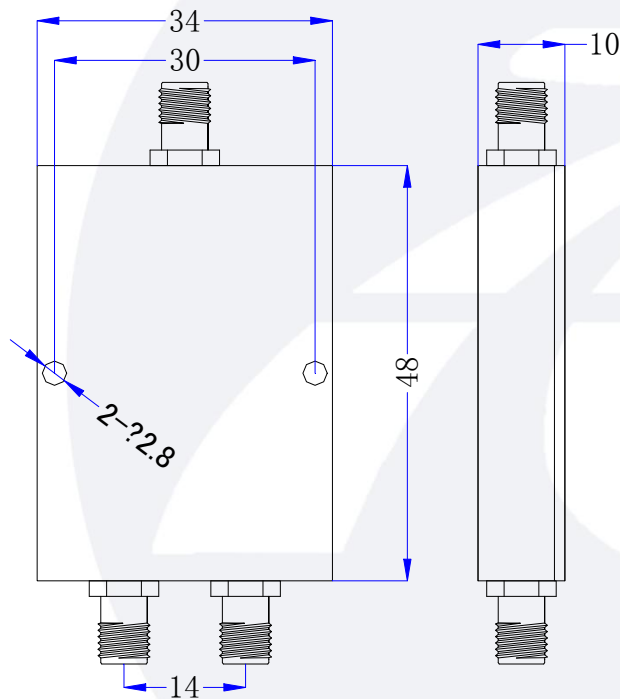

7 May 2020 02:55:05


CH1 SWR 100 m / REF 1
S11 2 : 1.0501 6.000 000 000 GHz

CH2 LOG 1.1 dB / REF -3 dB
S21/M 2 : -3.9840 dB 6.000 000 000 GHz

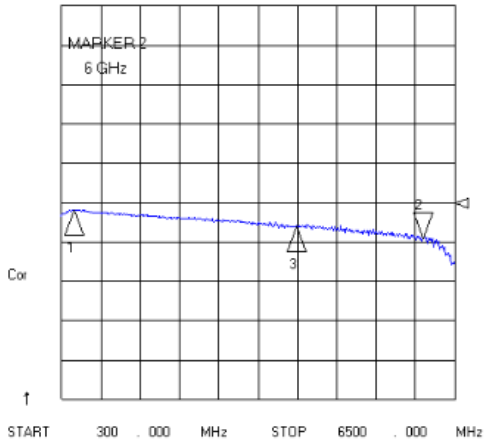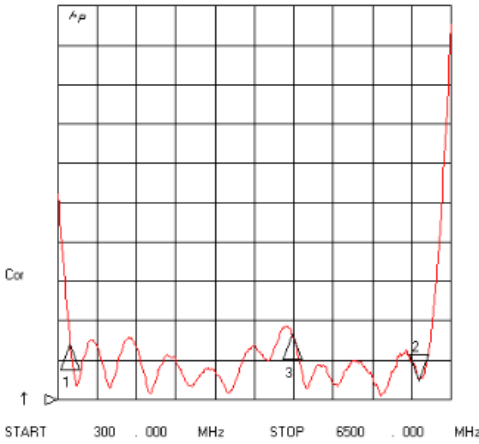

CH3 LDG .3 dB / REF 0 dB
S12/M 2 : -.00100 dB 6.000 000 000 GHz

CH4 SWR 100 m / REF 1
S22 2 : 1.1940 6.000 000 000 GHz

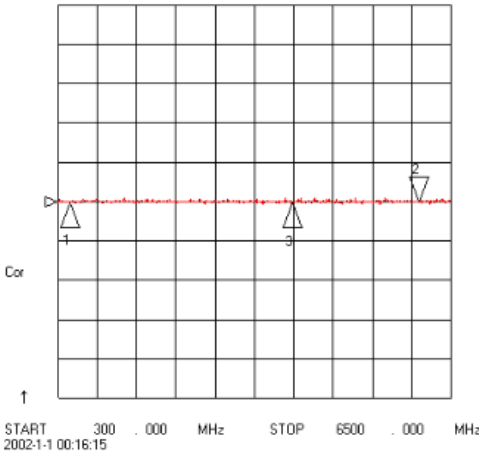

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>