

Part No:RS4W0430-S

Power divider/Combiner 4Way SMA50Ω 0.4 to 3GHz

电气特性 ELECTRICAL:

工作频率 Frequency Range: 0.4-3GHz

插入损耗 Insertion Loss: $\leq 2.0\text{dB}$

驻波 VSWR: $\leq 1.40: 1$

隔离 Isolation: $\geq 16\text{dB}$

幅度平衡 Amplitude Balance: $\leq \pm 1.0\text{dB}$

相位平衡 Phase Balance: $\leq \pm 10^\circ$

耐功率 Power Handling: 30 Watt

阻抗 Impedance: 50 OHMS



机械特性 MECHANICAL:


温度范围 Temperature Range: $-55^\circ\text{C} - +85^\circ\text{C}$

接口 Connectors: SMA-Female

相对湿度 Relative Humidity: 0 ~ 90%





外形尺寸 Outline Drawing:

Unit: mm

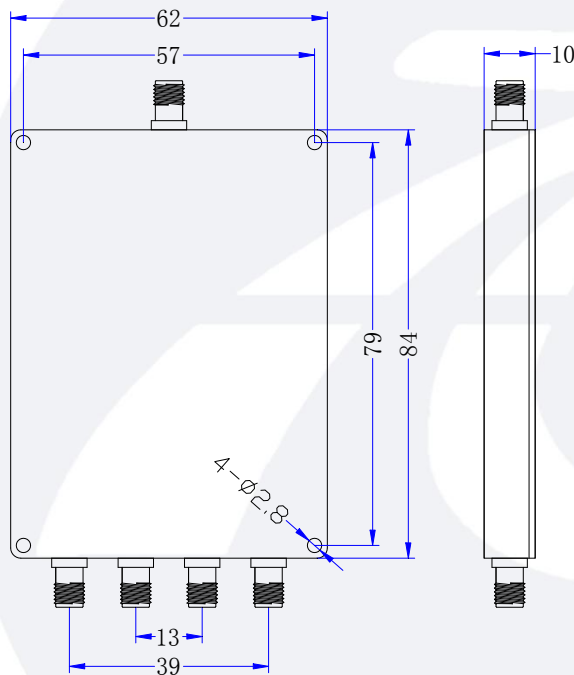

CH1 SWR 100 m / REF 1
S11 2 : 1. 0333 3. 000 000 000 GHz

CH2 LOG 2 dB / REF -6 dB
S21 2 : -7. 1230 dB 3. 000 000 000 GHz

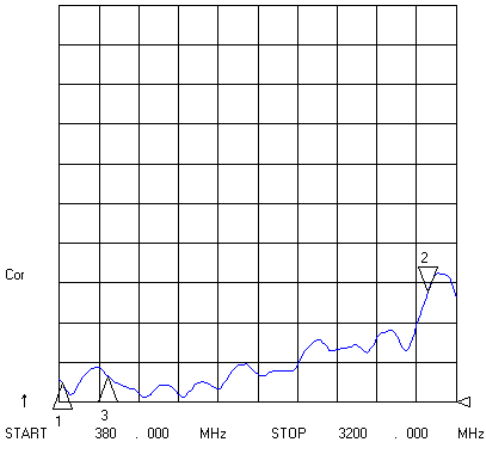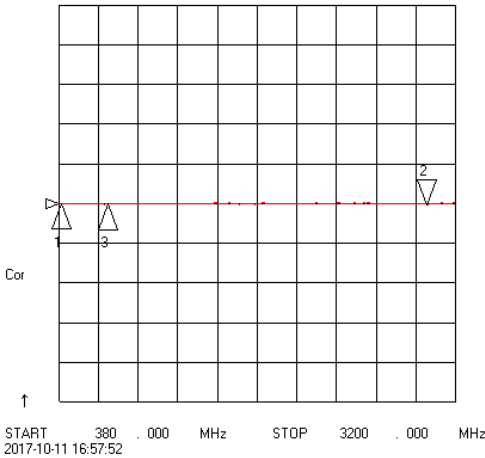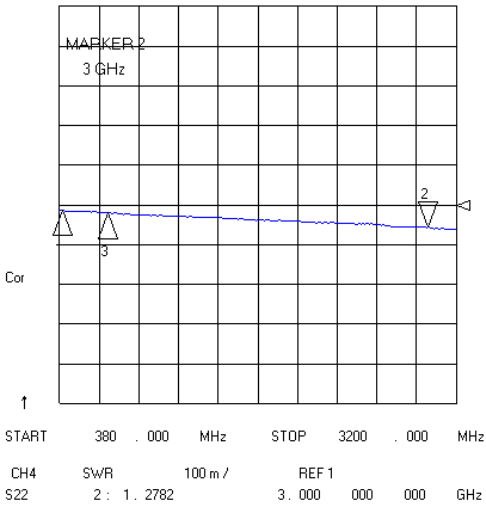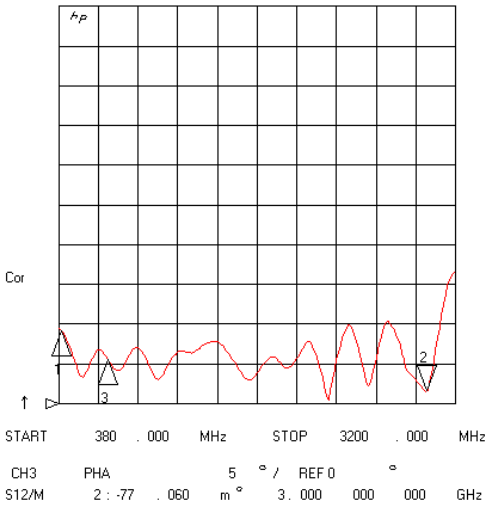

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>