

3-TERMINAL NEGATIVE VOLTAGE REGULATOR


■ GENERAL DESCRIPTION

The NJM7900 series of Monolithic 3-Terminal Negative Regulators is constructed using the New JRC Planar epitaxial process. These negative regulators are intended as complements to the popular NJM 7800 series of positive voltage regulators, and they are available in the same voltage options from -5 to -24V. The 7900 series employ internal current -limiting, safe-area protection, and thermal shutdown, making the virtually indestructible.

■ FEATURES


- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guarantee'd 1.5A Output Current
- Package Outline TO-220F
- Bipolar Technology

■ EQUIVALENT CIRCUIT

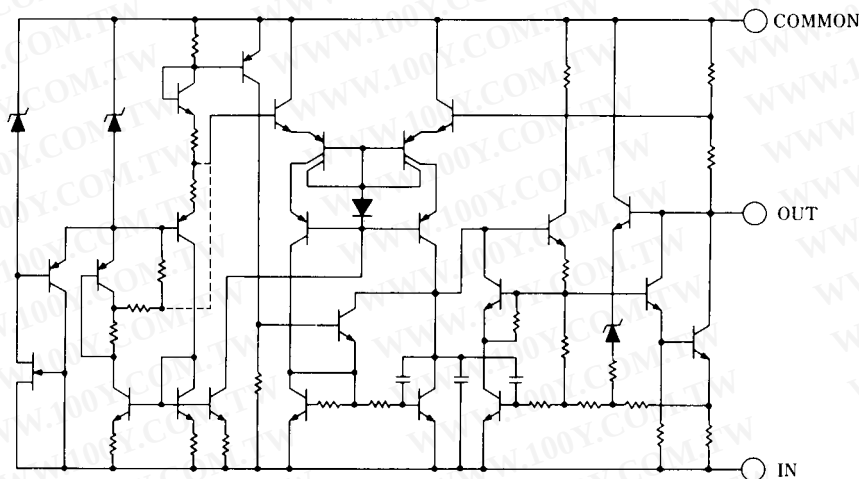

■ PACKAGE OUTLINE

(TO-220F)



1. COMMON
2. IN
3. OUT

NJM7900FA

(note) The radiation fin is connected Pin 2.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NJM7900

■ ABSOLUTE MAXIMUM RATINGS

($T_a=25^{\circ}\text{C}$)

PARAMETER	SYMBOL	MAXIMUM RATINGS		UNIT
Input Voltage	V_{IN}	7905 to 7909 7912 to 7915 7918 to 7924	-35 -35 -40	V
Storage Temperature Range	T_{stg}	-40 to +150		$^{\circ}\text{C}$
Operating Temperature Range	Operating Junction Temperature		T_j	-40 to +150
	Operating Junction Temperature		T_{opr}	-40 to +85
Power Dissipation	P_D	16 ($T_c \leq 45^{\circ}\text{C}$)		W

■ THERMAL CHARACTERISTICS

Thermal Resistance	Junction-to-Ambient Temperature	θ_{ja}	60	$^{\circ}\text{C/W}$
	Junction-to-Case	θ_{jc}	5	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ ELECTRICAL CHARACTERISTICS (T_j=25°C, C_{IN}=2.2μF, C_O=1.0μF)

Measurement is to be conducted in pulse testing.

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM7905FA						
Output Voltage	V _O	V _{IN} =-10V, I _O =0.5A	-4.8	-5.0	-5.2	V
Quiescent Current	I _Q	V _{IN} =-10V, I _O =0mA	-	2.2	5.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-10V, I _O =0.005 to 1.5A	-	50	80	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-7 to -25V, I _O =0.5A	-	5	50	mV
Ripple Rejection	RR	V _{IN} =-10V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	60	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-10V, I _O =0.5A, BW=10Hz to 100kHz	-	100	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-10V, I _O =5mA	-	-0.4	-	mV/°C
NJM7906FA						
Output Voltage	V _O	V _{IN} =-11V, I _O =0.5A	-5.75	-6.0	-6.25	V
Quiescent Current	I _Q	V _{IN} =-11V, I _O =0mA	-	2.2	5.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-11V, I _O =0.005 to 1.5A	-	50	90	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-8 to -25V, I _O =0.5A	-	5	60	mV
Ripple Rejection	RR	V _{IN} =-11V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	60	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-11V, I _O =0.5A, BW=10Hz to 100kHz	-	110	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-11V, I _O =5mA	-	-0.5	-	mV/°C
NJM7908FA						
Output Voltage	V _O	V _{IN} =-14V, I _O =0.5A	-7.7	-8.0	-8.3	V
Quiescent Current	I _Q	V _{IN} =-14V, I _O =0mA	-	2.2	5.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-14V, I _O =0.005 to 1.5A	-	60	110	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-10.5 to -25V, I _O =0.5A	-54	8	80	mV
Ripple Rejection	RR	V _{IN} =-14V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	-	60	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-14V, I _O =0.5A, BW=10Hz to 100kHz	-	130	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-14V, I _O =5mA	-	-0.7	-	mV/°C
NJM7909FA						
Output Voltage	V _O	V _{IN} =-15V, I _O =0.5A	-8.65	-9.0	-9.35	V
Quiescent Current	I _Q	V _{IN} =-15V, I _O =0mA	-	2.2	5.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-15V, I _O =0.005 to 1.5A	-	60	120	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-11.5 to -25V, I _O =0.5A	-	8	90	mV
Ripple Rejection	RR	V _{IN} =-15V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	59	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-15V, I _O =0.5A, BW=10Hz to 100kHz	-	150	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-15V, I _O =5mA	-	-0.8	-	mV/°C
NJM7912FA						
Output Voltage	V _O	V _{IN} =-19V, I _O =0.5A	-11.5	-12.0	-12.5	V
Quiescent Current	I _Q	V _{IN} =-19V, I _O =0mA	-	2.7	6.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-19V, I _O =0.005 to 1.5A	-	60	150	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-14.5 to -30V, I _O =0.5A	-	3	120	mV
Ripple Rejection	RR	V _{IN} =-19V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	68	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-19V, I _O =0.5A, BW=10Hz to 100kHz	-	150	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-19V, I _O =5mA	-	-0.4	-	mV/°C

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NJM7900


■ ELECTRICAL CHARACTERISTICS (T_J=25°C, C_{IN}=2.2μF, C_O=1.0μF)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
NJM7915FA						
Output Voltage	V _O	V _{IN} =-23V, I _O =0.5A	-14.4	-15.0	-15.6	V
Quiescent Current	I _Q	V _{IN} =-23V, I _O =0mA	-	2.7	6.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-23V, I _O =0.005 to 1.5A	-	60	180	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-17.5 to -30V, I _O =0.5A	-	3	150	mV
Ripple Rejection	RR	V _{IN} =-23V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	67	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-23V, I _O =0.5A, BW=10Hz to 100kHz	-	170	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-23V, I _O =5mA	-	-0.5	-	mV/°C
NJM7918FA						
Output Voltage	V _O	V _{IN} =-27V, I _O =0.5A	-17.3	-18.0	-18.7	V
Quiescent Current	I _Q	V _{IN} =-27V, I _O =0mA	-	2.7	6.8	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-27V, I _O =0.005 to 1.5A	-	60	210	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-21 to -33V, I _O =0.5A	-	4	180	mV
Ripple Rejection	RR	V _{IN} =-27V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	54	66	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-27V, I _O =0.5A, BW=10Hz to 100kHz	-	200	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-27V, I _O =5mA	-	-0.6	-	mV/°C
NJM7924FA						
Output Voltage	V _O	V _{IN} =-33V, I _O =0.5A	-23.0	-24.0	-25.0	V
Quiescent Current	I _Q	V _{IN} =-33V, I _O =0mA	-	2.7	6.0	mA
Load Regulation	ΔV _O - I _O	V _{IN} =-33V, I _O =0.005 to 1.5A	-	60	270	mV
Line Regulation	ΔV _O - V _{IN}	V _{IN} =-27 to -38V, I _O =0.5A	54	5	240	mV
Ripple Rejection	RR	V _{IN} =-33V, I _O =0.5A, e _{in} =2V _{P-P} , f=120Hz	-	64	-	dB
Output Noise Voltage	V _{NO}	V _{IN} =-33V, I _O =0.5A, BW=10Hz to 100kHz	-	300	-	μV
Average Temperature Coefficient of Output Voltage	ΔV _O /ΔT	V _{IN} =-33V, I _O =5mA	-	-0.8	-	mV/°C


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ TEST CIRCUIT

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage

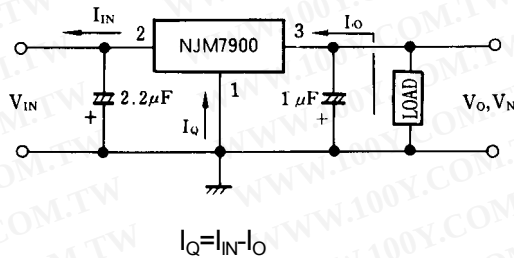


2. Ripple Rejection

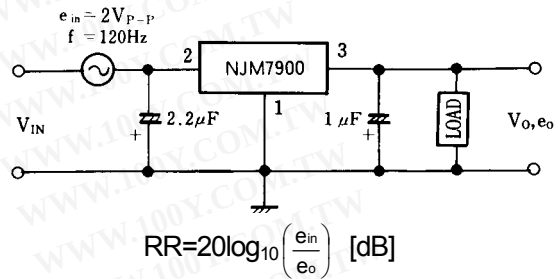


■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

NJM7900FA

(θ_{HS} = Heat Sink Thermal Resistance)

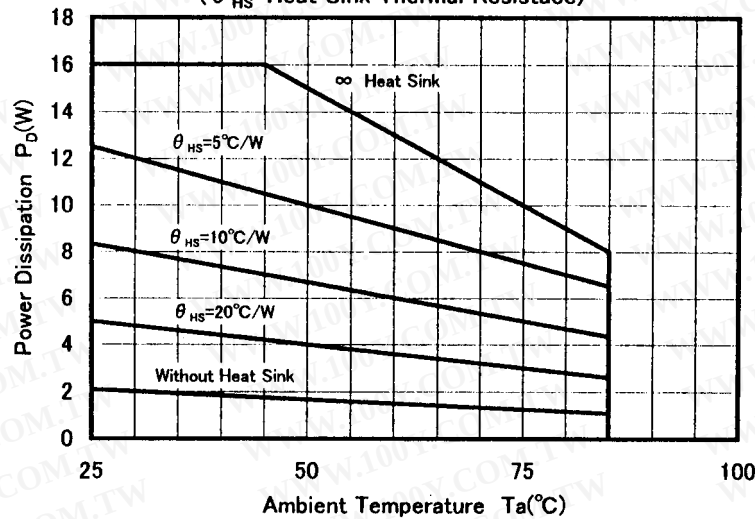


NJM7800LA/DL1A

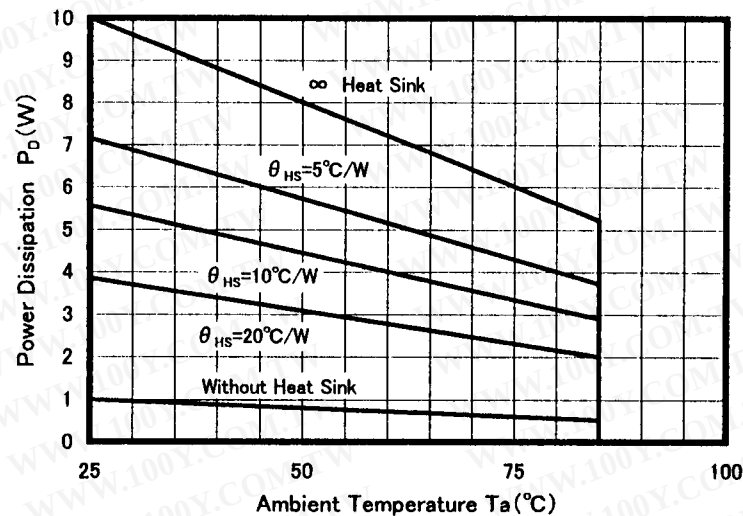

■ TYPICAL CHARACTERISTICS


NJM7900 Output Characteristics

($I_O = 0.5A$, $T_j = 25^\circ C$)

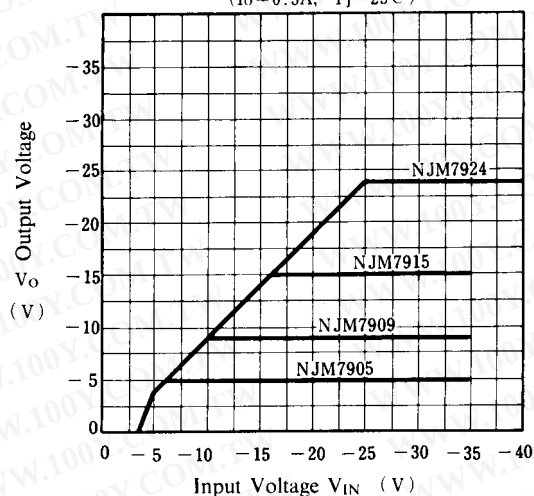

NJM7912 Output Voltage vs. Low Input Voltage


($T_j = 25^\circ C$)

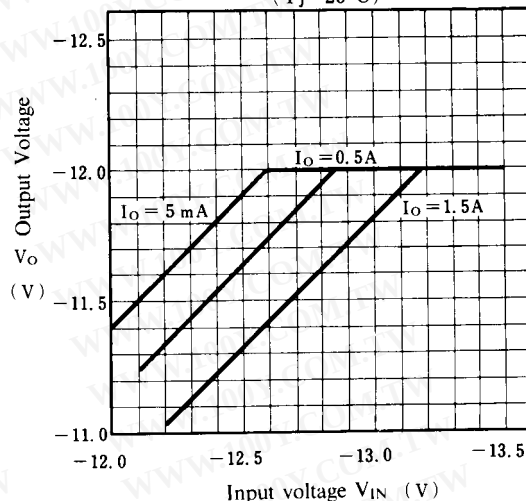

NJM7905/15/24

Load Characteristics


($T_j = 25^\circ C$)

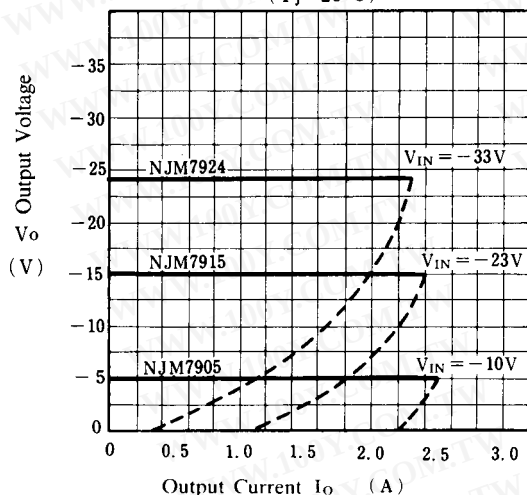


NJM7900 Series

Short Circuit Output Current

($T_j = 25^\circ C$)

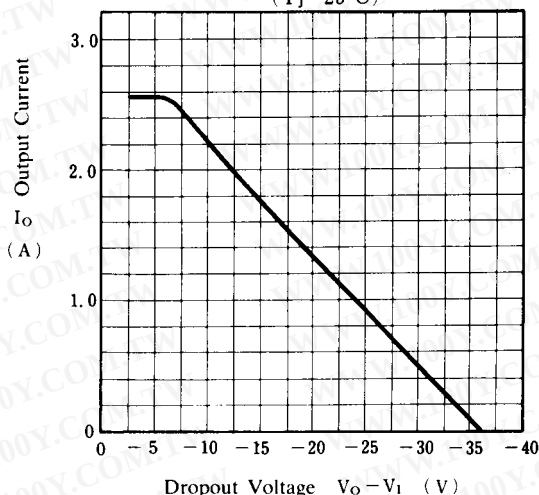


NJM7905/12/24 Output Voltage vs. Junction Temperature

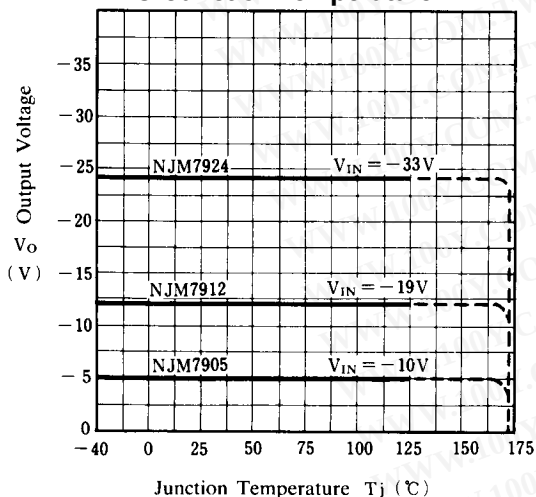

NJM7905/15/24 Ripple Rejection vs. Frequency


($I_O = 500mA$, $e_{in} = 2V_{p-p}$, $T_j = 25^\circ C$)

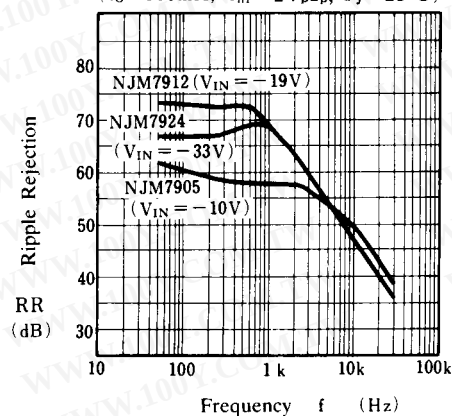


■ TYPICAL CHARACTERISTICS

NJM7905 Dropout Characteristics

($T_j = 25^\circ\text{C}$)

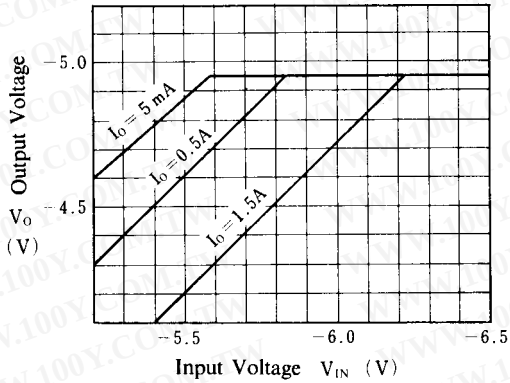


NJM7905 Output Voltage vs. Temperature

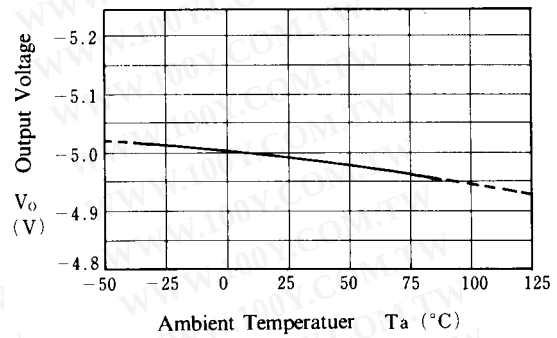

Quiescent Current vs. Input Voltage

($I_O = 0\text{ mA}$, $T_j = 25^\circ\text{C}$)

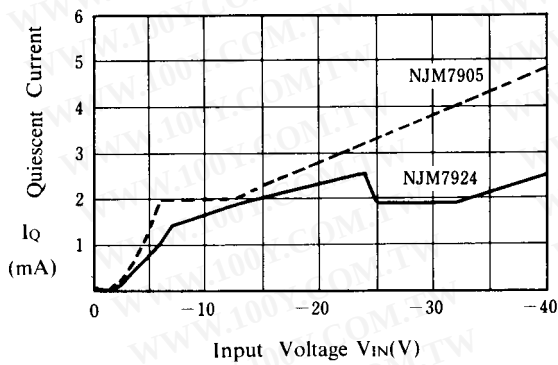

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.