


SMA/SSMA-JJ SMA 公頭轉 SSMA 公頭 SSMA/SMA-JJ SSMA 轉 SMA  
連接器

## SMA/SSMA-JJ

- ① SMA公
- ② SSMA公



## SMA Male to SSMA Male RF Connector Adapter

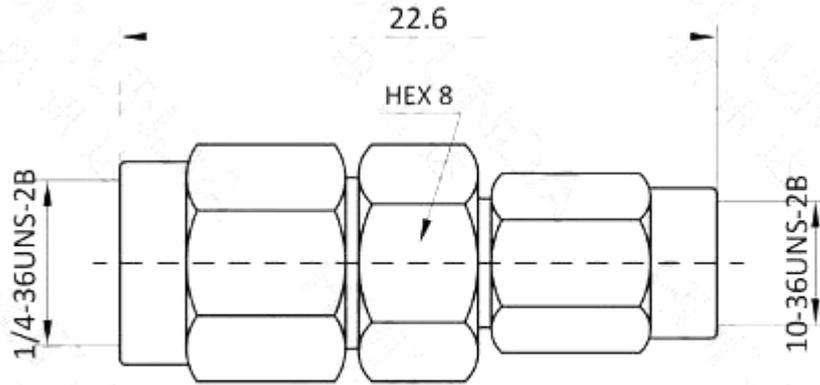

### Interface 界面

According to 根据

IEC 60169-15 & IEC 60169-18

### Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-6GHz

Dielectric Withstanding Voltage 介质耐压

≥750V RMS,50hz,at sea level

Working Voltage 工作电压

≤250V RMS,50Hz,at sea level

Dielectric Resistance 介电常数

≥1000MΩ

Contact Resistance 接触电阻

Center Contact 中心 ≤3mΩ

Outer Contact 外部 ≤2.5mΩ

### Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-45°C ~ +125°C

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

### Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Au 金
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金
Connection sleeve 螺套	Brass 黄铜	Au 金