



National Semiconductor

August 2000

LM4250 Programmable Operational Amplifier

General Description


The LM4250 and LM4250C are extremely versatile programmable monolithic operational amplifiers. A single external master bias current setting resistor programs the input bias current, input offset current, quiescent power consumption, slew rate, input noise, and the gain-bandwidth product. The device is a truly general purpose operational amplifier.

The LM4250C is identical to the LM4250 except that the LM4250C has its performance guaranteed over a 0°C to +70°C temperature range instead of the -55°C to +125°C temperature range of the LM4250.


Features

- ±1V to ±18V power supply operation
- 3 nA input offset current
- Standby power consumption as low as 500 nW
- No frequency compensation required
- Programmable electrical characteristics
- Offset voltage nulling capability
- Can be powered by two flashlight batteries
- Short circuit protection

Connection Diagrams

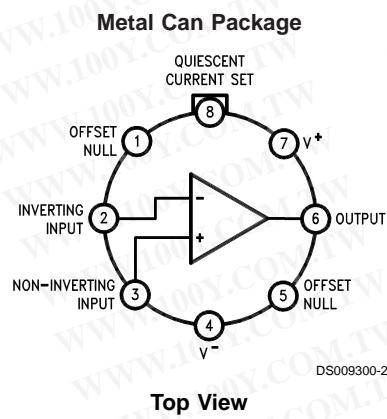


Top View

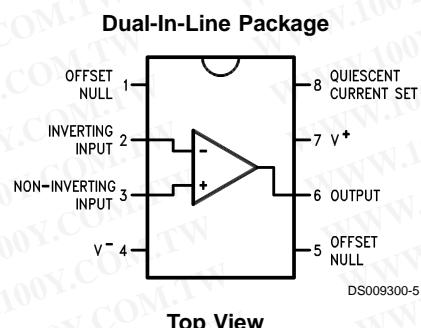


Top View

X5 Difference Amplifier



Quiescent $P_D = 0.6$ mW

500 Nano-Watt X10 Amplifier



Quiescent $P_D = 500$ nW

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

LM4250 Programmable Operational Amplifier

Absolute Maximum Ratings (Note 1)

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.

(Note 3)

| | LM4250 | LM4250C |
|--|--|---|
| Supply Voltage | ±18V | ±18V |
| Operating Temp. Range | $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ | $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ |
| Differential Input Voltage | ±30V | ±30V |
| Input Voltage (Note 2) | ±15V | ±15V |
| I_{SET} Current | 150 nA | 150 nA |
| Output Short Circuit Duration | Continuous | Continuous |
| T_{JMAX} | | |
| H-Package | 150°C | 100°C |
| N-Package | 150°C | 100°C |
| J-Package | 150°C | 100°C |
| M-Package | 150°C | 100°C |
| Power Dissipation at $T_A = 25^{\circ}\text{C}$ | | |
| H-Package (Still Air) (400 LF/Min Air Flow) | 500 mW 1200 mW | 300 mW 1200 mW |
| N-Package | 1000 mW | 500 mW |
| J-Package | 1000 mW | 600 mW |
| M-Package | 350 mW | |
| Thermal Resistance (Typical) θ_{JA} | | |
| H-Package (Still Air) (400 LF/Min Air Flow) | 165°C/W 65°C/W | 165°C/W 65°C/W |
| N-Package | 108°C/W | 130°C/W |
| J-Package | 108°C/W | 108°C/W |
| M-Package | | 190°C/W |
| (Typical) θ_{JC} | | |
| H-Package | 21°C/W | 21°C/W |
| Storage Temperature Range | −65°C to +150°C | −65°C to +150°C |
| Soldering Information | | |
| Dual-In-Line Package | | |
| Soldering (10 seconds) | 260°C | |
| Small Outline Package | | |
| Vapor Phase (60 seconds) | 215°C | |
| Infrared (15 seconds) | 220°C | |
| See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices. | | |
| ESD tolerance (Note 4) | 800V | |
| Note 1: "Absolute Maximum Ratings" indicate limits beyond which damage to the device may occur. Operating Ratings indicate conditions for which the device is functional, but do not guarantee specific performance limits. | | |
| Note 2: For supply voltages less than ±15V, the absolute maximum input voltage is equal to the supply voltage. | | |
| Note 3: Refer to RETS4250X for military specifications. | | |
| Note 4: Human body model, 1.5 kΩ in series with 100 pF. | | |

勝特力材料 886-3-5753170

胜特力电子(上海) 86-21-54151736

胜特力电子(深圳) 86-755-83298787

[Http://www.100y.com.tw](http://www.100y.com.tw)

Resistor Biasing

Set Current Setting Resistor to V⁻

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

| I _{SET} | | | | | |
|------------------|---------|---------|---------|---------|---------|
| V _S | 0.1 μA | 0.5 μA | 1.0 μA | 5 μA | 10 μA |
| ±1.5V | 25.6 MΩ | 5.04 MΩ | 2.5 MΩ | 492 kΩ | 244 kΩ |
| ±3.0V | 55.6 MΩ | 11.0 MΩ | 5.5 MΩ | 1.09 MΩ | 544 kΩ |
| ±6.0V | 116 MΩ | 23.0 MΩ | 11.5 MΩ | 2.29 MΩ | 1.14 MΩ |
| ±9.0V | 176 MΩ | 35.0 MΩ | 17.5 MΩ | 3.49 MΩ | 1.74 MΩ |
| ±12.0V | 236 MΩ | 47.0 MΩ | 23.5 MΩ | 4.69 MΩ | 2.34 MΩ |
| ±15.0V | 296 MΩ | 59.0 MΩ | 29.5 MΩ | 5.89 MΩ | 2.94 MΩ |

Electrical Characteristics

LM4250 (-55°C ≤ T_A ≤ +125°C unless otherwise specified.) T_A = T_J

| Parameter | Conditions | V _S = ±1.5V | | | |
|--------------------------------|--|-------------------------|--------|--------------------------|--------|
| | | I _{SET} = 1 μA | | I _{SET} = 10 μA | |
| | | Min | Max | Min | Max |
| V _{OS} | R _S ≤ 100 kΩ, T _A = 25°C | | 3 mV | | 5 mV |
| I _{OS} | T _A = 25°C | | 3 nA | | 10 nA |
| I _{bias} | T _A = 25°C | | 7.5 nA | | 50 nA |
| Large Signal Voltage Gain | R _L = 100 kΩ, T _A = 25°C V _O = ±0.6V, R _L = 10 kΩ | 40k | | 50k | |
| Supply Current | T _A = 25°C | | 7.5 μA | | 80 μA |
| Power Consumption | T _A = 25°C | | 23 μW | | 240 μW |
| V _{OS} | R _S ≤ 100 kΩ | | 4 mV | | 6 mV |
| I _{OS} | T _A = +125°C T _A = -55°C | | 5 nA | | 10 nA |
| I _{bias} | | | 3 nA | | 10 nA |
| Input Voltage Range | | ±0.6V | | ±0.6V | |
| Large Signal Voltage Gain | V _O = ±0.5V, R _L = 100 kΩ R _L = 10 kΩ | 30k | | 30k | |
| Output Voltage Swing | R _L = 100 kΩ R _L = 10 kΩ | ±0.6V | | ±0.6V | |
| Common Mode Rejection Ratio | R _S ≤ 10 kΩ | 70 dB | | 70 dB | |
| Supply Voltage Rejection Ratio | R _S ≤ 10 kΩ | 76 dB | | 76 dB | |
| Supply Current | | | 8 μA | | 90 μA |
| Parameter | Conditions | V _S = ±15V | | | |
| | | I _{SET} = 1 μA | | I _{SET} = 10 μA | |
| | | Min | Max | Min | Max |
| V _{OS} | R _S ≤ 100 kΩ, T _A = 25°C | | 3 mV | | 5 mV |
| I _{OS} | T _A = 25°C | | 3 nA | | 10 nA |
| I _{bias} | T _A = 25°C | | 7.5 nA | | 50 nA |
| Large Signal Voltage Gain | R _L = 100 kΩ, T _A = 25°C V _O = ±10V, R _L = 10 kΩ | 100k | | 100k | |
| Supply Current | T _A = 25°C | | 10 μA | | 90 μA |
| Power Consumption | T _A = 25°C | | 300 μW | | 2.7 mW |
| V _{OS} | R _S ≤ 100 kΩ | | 4 mV | | 6 mV |
| I _{OS} | T _A = +125°C T _A = -55°C | | 25 nA | | 25 nA |
| I _{bias} | | | 3 nA | | 10 nA |
| Input Voltage Range | | ±13.5V | | ±13.5V | |

Electrical Characteristics (Continued)

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

| Parameter | Conditions | $V_S = \pm 15V$ | | | |
|--------------------------------|--|---------------------|-------------|----------------------|-------------|
| | | $I_{SET} = 1 \mu A$ | | $I_{SET} = 10 \mu A$ | |
| | | Min | Max | Min | Max |
| Large Signal Voltage Gain | $V_O = \pm 10V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | 50k | | | 50k |
| Output Voltage Swing | $R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | $\pm 12V$ | | $\pm 12V$ | |
| Common Mode Rejection Ratio | $R_S \leq 10 k\Omega$ | 70 dB | | 70 dB | |
| Supply Voltage Rejection Ratio | $R_S \leq 10 k\Omega$ | 76 dB | | 76 dB | |
| Supply Current | | | 11 μA | | 100 μA |
| Power Consumption | | | 330 μW | | 3 mW |

Electrical CharacteristicsLM4250C ($0^\circ C \leq T_A \leq +70^\circ C$ unless otherwise specified.) $T_A = T_J$

| Parameter | Conditions | $V_S = \pm 1.5V$ | | | |
|--------------------------------|---|---------------------|------------|----------------------|-------------|
| | | $I_{SET} = 1 \mu A$ | | $I_{SET} = 10 \mu A$ | |
| | | Min | Max | Min | Max |
| V_{OS} | $R_S \leq 100 k\Omega, T_A = 25^\circ C$ | | 5 mV | | 6 mV |
| I_{OS} | $T_A = 25^\circ C$ | | 6 nA | | 20 nA |
| I_{bias} | $T_A = 25^\circ C$ | | 10 nA | | 75 nA |
| Large Signal Voltage Gain | $R_L = 100 k\Omega, T_A = 25^\circ C$ $V_O = \pm 0.6V, R_L = 10 k\Omega$ | 25k | | 25k | |
| Supply Current | $T_A = 25^\circ C$ | | 8 μA | | 90 μA |
| Power Consumption | $T_A = 25^\circ C$ | | 24 μW | | 270 μW |
| V_{OS} | $R_S \leq 10 k\Omega$ | | 6.5 mV | | 7.5 mV |
| I_{OS} | | | 8 nA | | 25 nA |
| I_{bias} | | | 10 nA | | 80 nA |
| Input Voltage Range | | $\pm 0.6V$ | | $\pm 0.6V$ | |
| Large Signal Voltage Gain | $V_O = \pm 0.5V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | 25k | | 25k | |
| Output Voltage Swing | $R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | $\pm 0.6V$ | | $\pm 0.6V$ | |
| Common Mode Rejection Ratio | $R_S \leq 10 k\Omega$ | 70 dB | | 70 dB | |
| Supply Voltage Rejection Ratio | $R_S \leq 10 k\Omega$ | 74 dB | | 74 dB | |
| Supply Current | | | 8 μA | | 90 μA |
| Power Consumption | | | 24 μW | | 270 μW |


| Parameter | Conditions | $V_S = \pm 15V$ | | | |
|---------------------------|--|---------------------|-------------|----------------------|-------------|
| | | $I_{SET} = 1 \mu A$ | | $I_{SET} = 10 \mu A$ | |
| | | Min | Max | Min | Max |
| V_{OS} | $R_S \leq 100 k\Omega, T_A = 25^\circ C$ | | 5 mV | | 6 mV |
| I_{OS} | $T_A = 25^\circ C$ | | 6 nA | | 20 nA |
| I_{bias} | $T_A = 25^\circ C$ | | 10 nA | | 75 nA |
| Large Signal Voltage Gain | $R_L = 100 k\Omega, T_A = 25^\circ C$ $V_O = \pm 10V, R_L = 10 k\Omega$ | 60k | | 60k | |
| Supply Current | $T_A = 25^\circ C$ | | 11 μA | | 100 μA |
| Power Consumption | $T_A = 25^\circ C$ | | 330 μW | | 3 mW |
| V_{OS} | $R_S \leq 100 k\Omega$ | | 6.5 mV | | 7.5 mV |
| I_{OS} | | | 8 nA | | 25 nA |
| I_{bias} | | | 10 nA | | 80 nA |

Electrical Characteristics (Continued)


| Parameter | Conditions | $V_S = \pm 15V$ | | | |
|--------------------------------|--|---------------------|-----|----------------------|-------------|
| | | $I_{SET} = 1 \mu A$ | | $I_{SET} = 10 \mu A$ | |
| | | Min | Max | Min | Max |
| Input Voltage Range | | $\pm 13.5V$ | | $\pm 13.5V$ | |
| Large Signal Voltage Gain | $V_O = \pm 10V, R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | 50k | | 50k | |
| Output Voltage Swing | $R_L = 100 k\Omega$ $R_L = 10 k\Omega$ | $\pm 12V$ | | $\pm 12V$ | |
| Common Mode Rejection Ratio | $R_S \leq 10 k\Omega$ | 70 dB | | 70 dB | |
| Supply Voltage Rejection Ratio | $R_S \leq 10 k\Omega$ | 74 dB | | 74 dB | |
| Supply Current | | | | 11 μA | 100 μA |
| Power Consumption | | | | 330 μW | 3 mW |

Typical Performance Characteristics


Input Bias Current vs I_{SET}

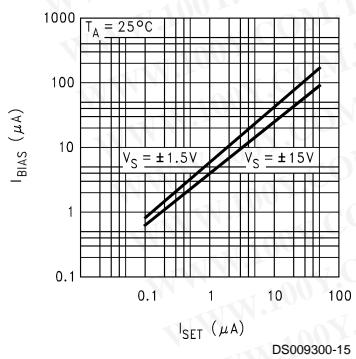


Input Bias Current vs Temperature

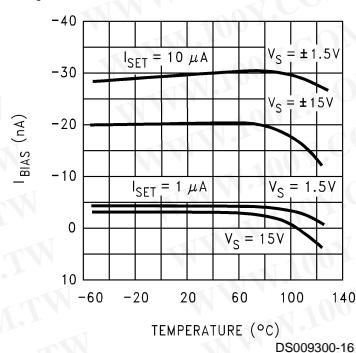


Input Offset Current vs Temperature

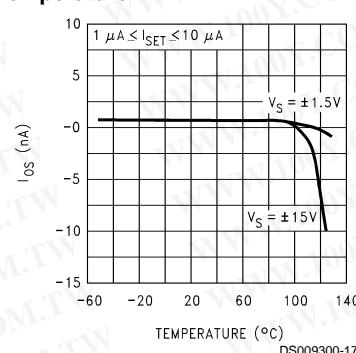


Unnulled Input Offset Voltage Change vs I_{SET}

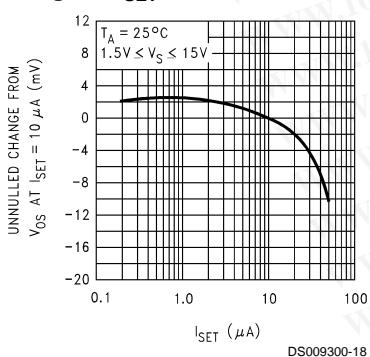

Unnulled Input Offset Voltage Change vs Temperature

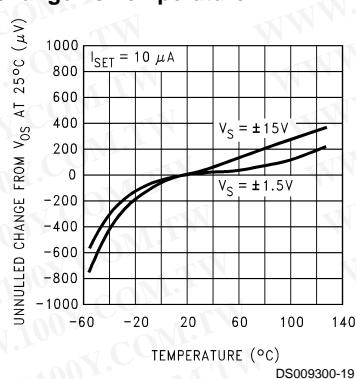

Peak to Peak Output Voltage Swing vs Load Resistance

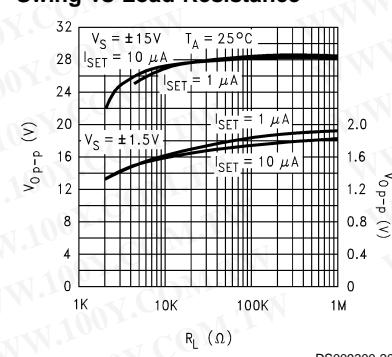


勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787


[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Performance Characteristics (Continued)

Peak to Peak Output Voltage Swing vs Supply Voltage

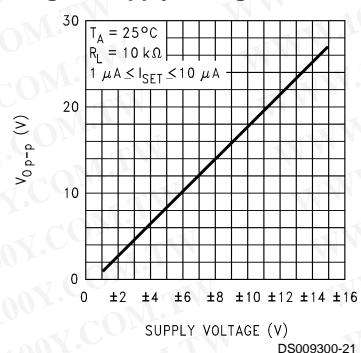


Quiescent Current (I_q) vs Temperature

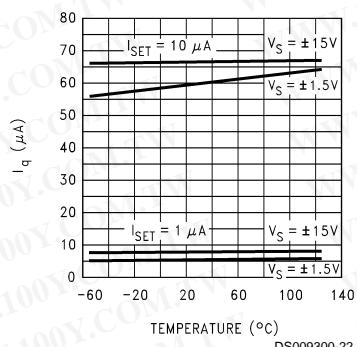


勝特力材料 866-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Quiescent Current (I_q) vs I_{SET}

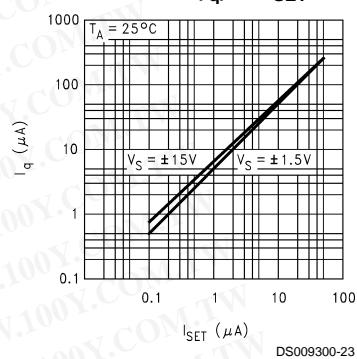


Slew Rate vs I_{SET}

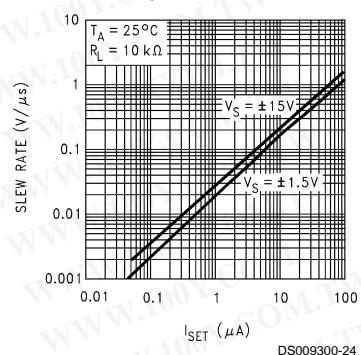


Gain Bandwidth Product vs I_{SET}

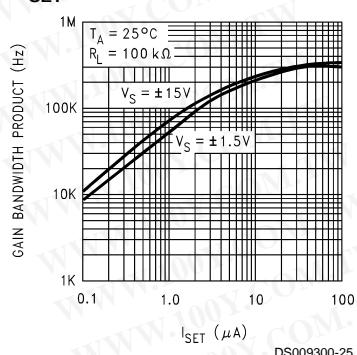


Open Loop Voltage Gain vs I_{SET}

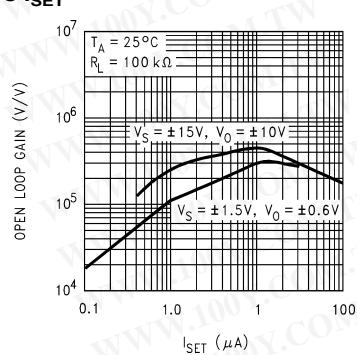


Phase Margin vs I_{SET}

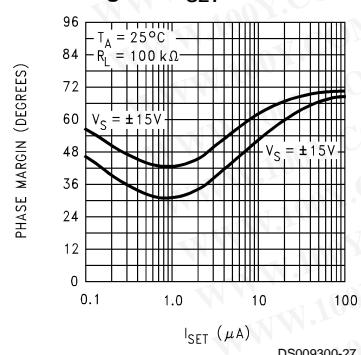

Input Noise Current (I_n) and Voltage (E_n) vs Frequency

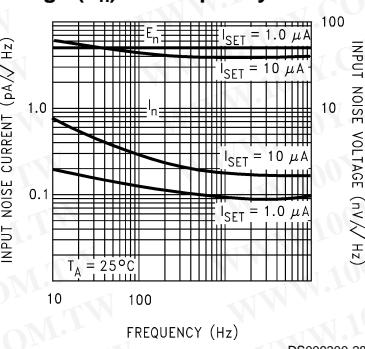


R_{SET} vs I_{SET}

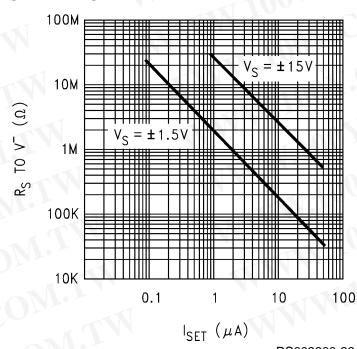

Typical Applications


X5 Difference Amplifier

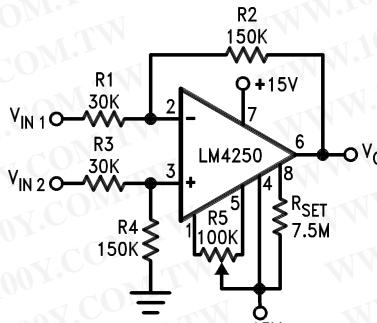

Quiescent $P_D = 0.6$ mW

DS009300-3


500 Nano-Watt X10 Amplifier

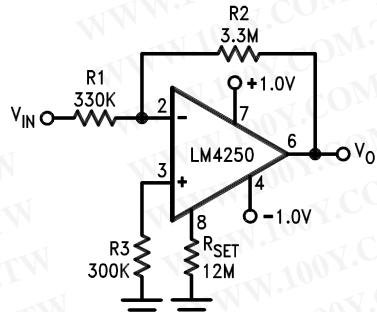

Quiescent $P_D = 500$ nW

DS009300-4

Floating Input Meter Amplifier
100 nA full Scale

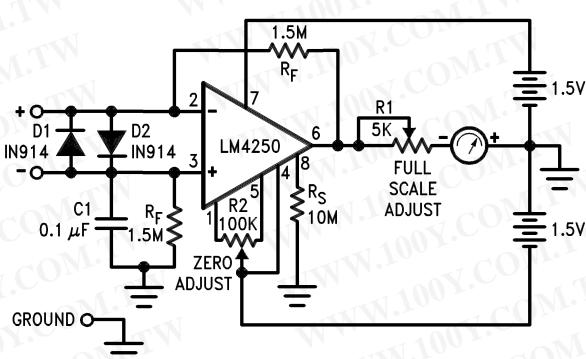

Quiescent $P_D = 1.8$ μW


*Meter movement (0–100 μA, 2 kΩ) marked for 0–100 nA full scale.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787


[Http://www.100y.com.tw](http://www.100y.com.tw)

Typical Applications (Continued)


勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

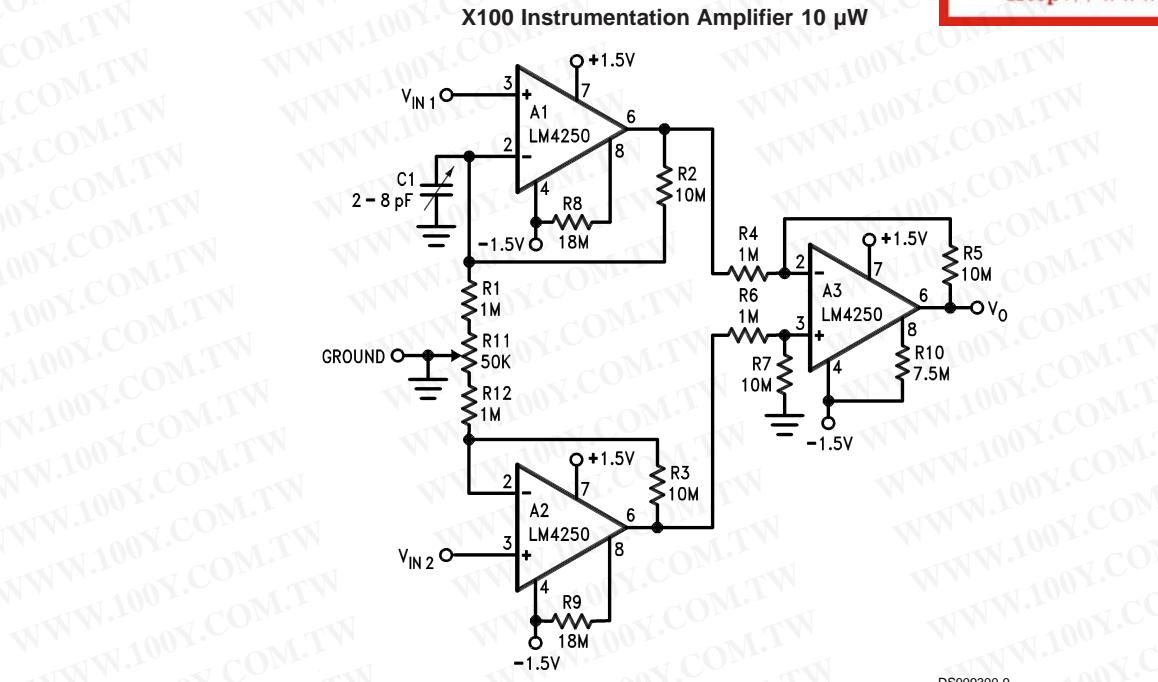

DS009300-9

Note 5: Quiescent P_D = 10 μW.Note 6: R₂, R₃, R₄, R₅, R₆ and R₇ are 1% resistors.Note 7: R₁₁ and C₁ are for DC and AC common mode rejection adjustments.**R_{SET} Connected to V⁻**

DS009300-10

R_{SET} Connected to Ground


DS009300-11

I_{SET} Equations:


$$I_{SET} \approx \frac{V^+ + |V^-| - 0.5}{R_{SET}} \quad \text{where } R_{SET} \text{ is connected to } V^-.$$

$$I_{SET} \approx \frac{V^+ - 0.5}{R_{SET}} \quad \text{where } R_{SET} \text{ is connected to ground.}$$


DS009300-30

Transistor Current Sourcing Biasing

DS009300-12


*R₁ limits I_{SET} maximum**FET Current Sourcing Biasing**

DS009300-13

Offset Null Circuit

DS009300-14

Schematic Diagram

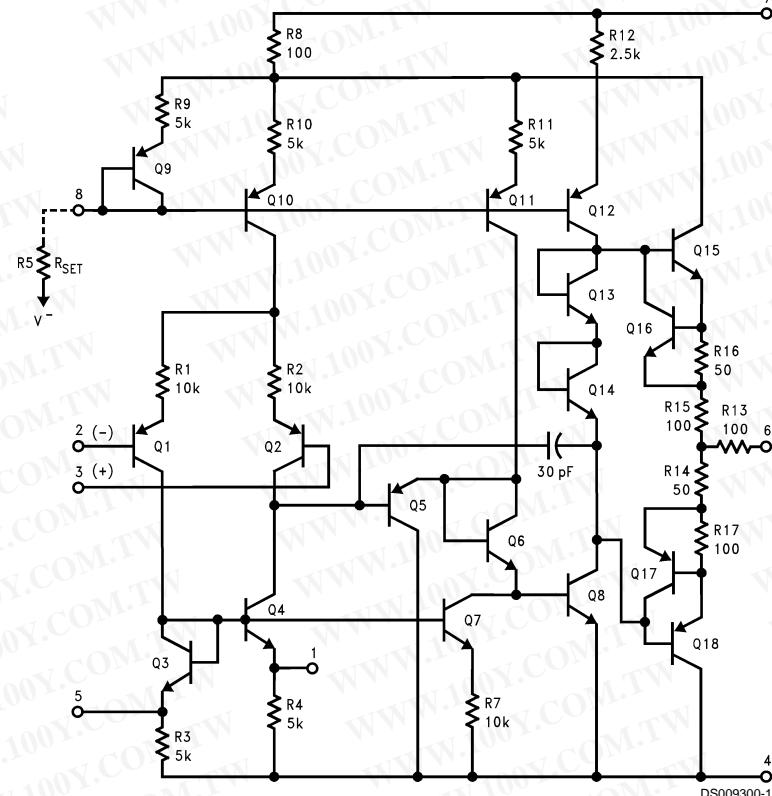

勝特力材料 886-3-5753170
 勝特力電子(上海) 86-21-54151736
 勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


Ordering Information

| Temperature Range | | Package | NSC Package Number |
|--|---|---------------------|--------------------|
| Military | Commercial | | |
| $-55^{\circ}\text{C} \leq T_A \leq +125^{\circ}\text{C}$ | $0^{\circ}\text{C} \leq T_A \leq +70^{\circ}\text{C}$ | LM4250CN | N08E |
| | LM4250CM LM4250CMX | 8-Pin Surface Mount | M08A |
| LM4250J-MIL | | 8-Pin Ceramic DIP | J08E |
| | LM4250CH | 8-Pin Metal Can | H08C |

Physical Dimensions


inches (millimeters) unless otherwise noted

勝特力材料 886-3-5753170
 胜特力电子(上海) 86-21-54151736
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

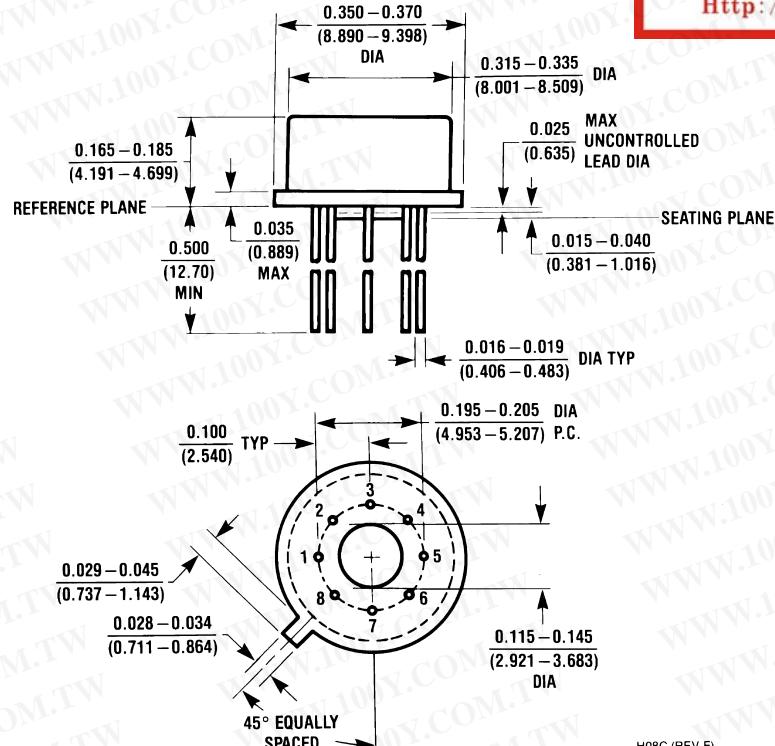

Metal Can Package (H)
 Order Number LM4250CH
 NS Package Number H08C

H08C (REV E)

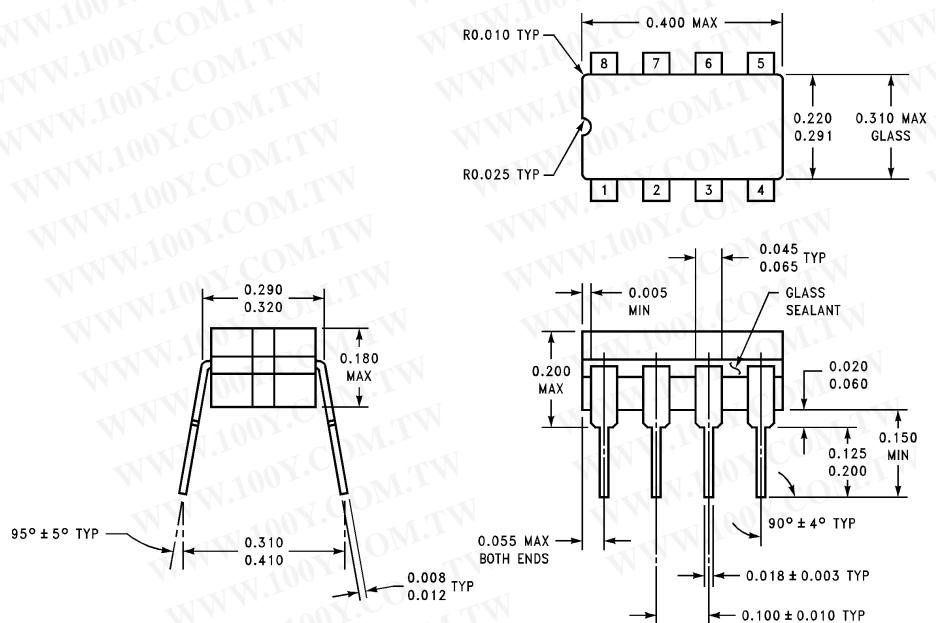


Ceramic Dual-In-Line Package (J)
 Order Number LM4250J-MIL
 NS Package Number J08A


J08A (REV K)

Physical Dimensions inches (millimeters) unless otherwise noted (Continued)

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

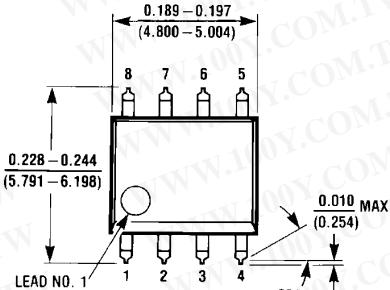

Small Outline Package (M)
 Order Number LM4250CM or LM4250CMX
 NS Package Number M08A

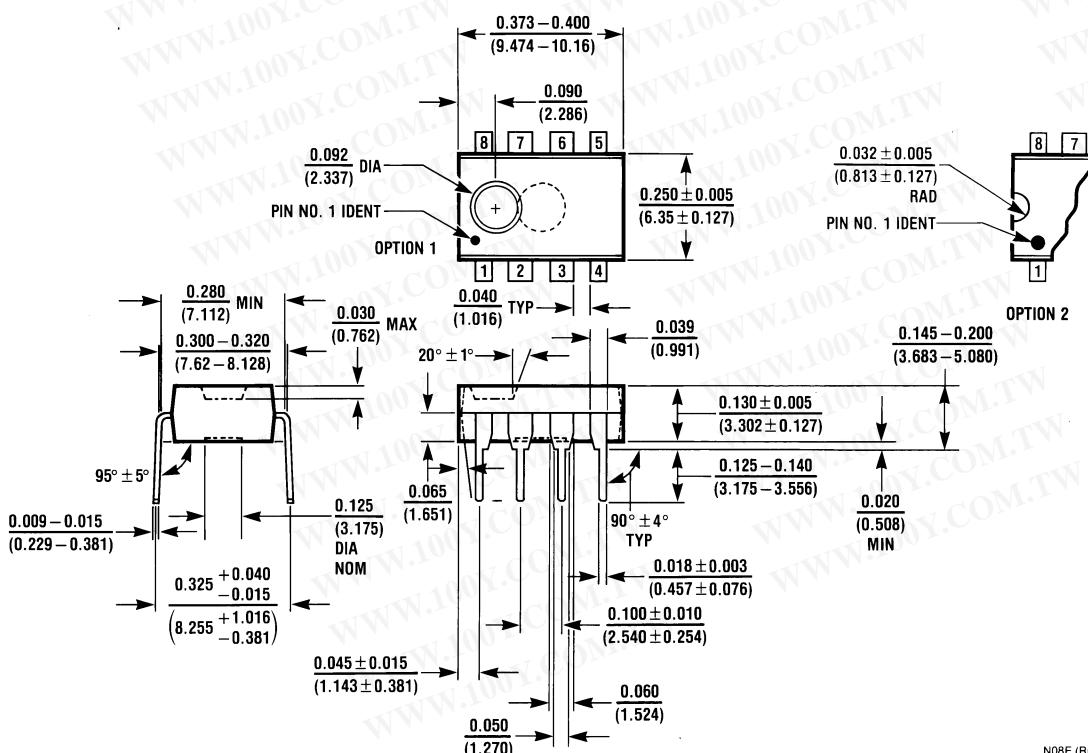

Molded Dual-In-Line Package (N)
 Order Number LM4250CN
 NS Package Number N08E

N08E (REV F)