

SMA-JHD

- 1 SMA公头
- 2 PCB面板固定底座



SMA-KHD15

- 1 SMA母头
- 2 侧插PCB面板固定底座



SMA-KHDC3

- 1 SMA母头
- 2 PCB面板固定底座



SMA-KHD-6G

- 1 SMA母头
- 2 PCB面板固定底座





产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes,
 本文件包含专有信息，不得出于任何目的向他人披露此类信息。
 not used for sales/marketing/procurement purposes without written permission.
 未经书面许可，不得用于销售/营销/采购目的。

- 1..Electrical/电气
- 1.1 Impedance /阻抗 50Ω
- 1.2 Frequency /频率 DC-6GHz
- 1.3 VSWR/驻波 ≤1.25
- 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
- 1.5 Center contact resistance /中心接触电阻 ≤3MΩ
- 1.6 Outer contact resistance/外部接触电阻 ≤2MΩ
- 1.7 Insulation resistance/绝缘电阻 ≥5000MΩ

- 2 Environmenta &Mechanical/环境与机械
- 2.1 Temperture range/温度范围 -45°~+125°
- 2.2 Rohs Compliant/符合RoHS
- 2.3 Durability/耐久性 500cycles

- 3 Material and Plating/材料和电镀
- 3.1 Inner Contact/内导体: beryllium-copper, gold plated/铍铜镀金
- 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
- 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

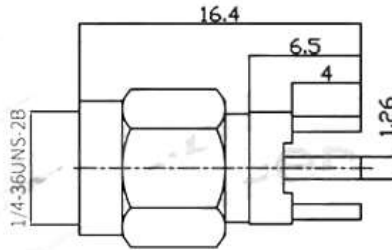

Recommend mounting hole
 建议安装孔

产品型号P/N: SMA-JHD

产品规格书



PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes,
 本文件包含专有信息，不得出于任何目的向他人披露此类信息。
 not used for sales/marketing/procurement purposes without written permission.
 未经书面许可，不得用于销售/营销/采购目的。

- 1..Electrical/电气
- 1.1 Impedance /阻抗 50Ω
- 1.2 Frequency /频率 DC-18GHz
- 1.3 VSWR/驻波 ≤1.35
- 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
- 1.5 Center contact resistance /中心接触电阻 ≤3mΩ
- 1.6 Outer contact resistance/外部接触电阻 ≤2mΩ
- 1.7 Insulation resistance/绝缘电阻 ≥5000MΩ

- 2 Environmenta &Mechanical/环境与机械
- 2.1 Temperture range/温度范围 -45°~+125°
- 2.2 Rohs Compliant/符合RoHS
- 2.3 Durability/耐久性 500cycles

- 3 Material and Plating/材料和电镀
- 3.1 Inner Contact/内导体: beryllium-copper, gold plated/铍铜镀金
- 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
- 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯



Recommend mounting hole
 建议安装孔

产品型号P/N: SMA-KHD15



产品规格书

This document contains proprietary information and such information may not be disclosed to others for any purposes, 本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission. 未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气
- 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-6GHz
 - 1.3 VSWR/驻波 ≤1.25
 - 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
 - 1.5 Center contact resistance /中心接触电阻 ≤3mΩ
 - 1.6 Outer contact resistance /外部接触电阻 ≤2mΩ
 - 1.7 Insulation resistance /绝缘电阻 ≥5000MΩ

- 2 Environmenta & Mechanical/环境与机械
- 2.1 Temperture range/温度范围 -45°~+125°
 - 2.2 Rohs Compliant/符合RoHS
 - 2.3 Durability/耐久性 500cycles

- 3 Material and Plating/材料和电镀
- 3.1 Inner Contact/内导体: beryllium-copper, gold plated/铍铜镀金
 - 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
 - 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯



产品型号P/N: SMA-KHDC3

产品规格书



PRODUCT SPECIFICATION

This document contains proprietary information and such information may not be disclosed to others for any purposes, 本文件包含专有信息，不得出于任何目的向他人披露此类信息。
not used for sales/marketing/procurement purposes without written permission. 未经书面许可，不得用于销售/营销/采购目的。

1. Electrical/电气
- 1.1 Impedance /阻抗 50Ω
 - 1.2 Frequency /频率 DC-6GHz
 - 1.3 VSWR/驻波 ≤1.25
 - 1.4 Dielectric withstanding voltage /介质耐压 1000V(rms)
 - 1.5 Center contact resistance /中心接触电阻 ≤3mΩ
 - 1.6 Outer contact resistance /外部接触电阻 ≤2mΩ
 - 1.7 Insulation resistance /绝缘电阻 ≥5000MΩ

- 2 Environmenta & Mechanical/环境与机械
- 2.1 Temperture range/温度范围 -45°~+125°
 - 2.2 Rohs Compliant/符合RoHS
 - 2.3 Durability/耐久性 500cycles

- 3 Material and Plating/材料和电镀
- 3.1 Inner Contact/内导体: beryllium-copper, gold plated/铍铜镀金
 - 3.2 Outer Contact/外导体: Brass, Gold plated/黄铜镀金
 - 3.3 Insulators/绝缘体: PTFE/聚四氟乙烯

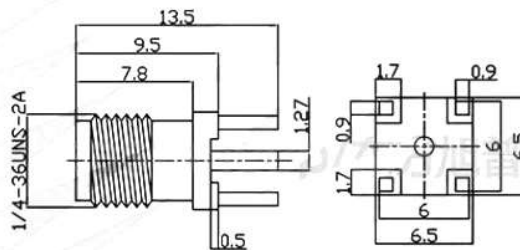

Recommend mounting hole
建议安装孔

产品型号P/N: SMA-KHD-6G