


毫米波测试转接器 SMA/3.5-KJG SMA 母转 3.5MM 公 26.5G VSWR1.2/50ohm



产品型号Model: SMA/3.5-KJG

频率Frequency:DC-26.5GHz

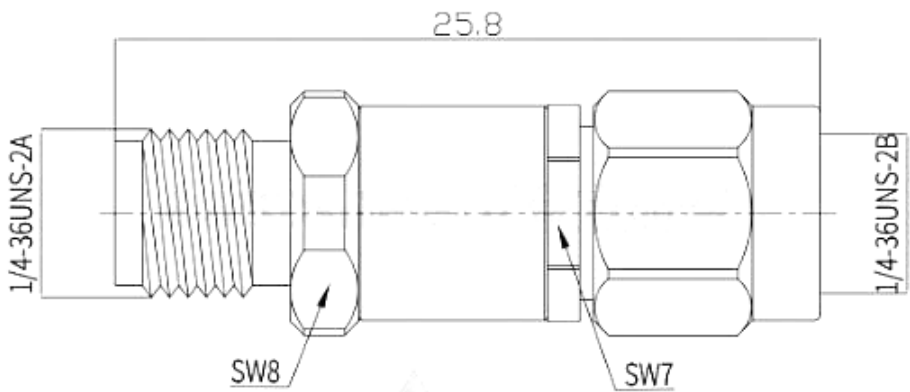

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

|     |                                               |            |
|-----|-----------------------------------------------|------------|
| 1.1 | 阻抗 Impedance                                  | 50Ω        |
| 1.2 | 频率范围 Frequency range                          | DC-26.5GHz |
| 1.3 | 驻波 VSWR                                       | ≤1.2       |
| 1.4 | 介质耐压 Dielectric withstanding voltage          | 500V rms   |
| 1.5 | 内导体接触电阻 Internal conductor contact resistance | ≤3mΩ       |
| 1.6 | 外导体接触电阻 External conductor contact resistance | ≤2mΩ       |
| 1.7 | 绝缘电阻 Insulation resistance                    | ≥1000MΩ    |

2.环境与机械 Environment and Machinery

|     |                        |            |
|-----|------------------------|------------|
| 2.1 | 温度范围 Temperature range | -45°~+165° |
| 2.2 | 耐久性 Durability         | 500cycles  |

3.材料和镀层 Material and Plating

|     |                     |                                    |
|-----|---------------------|------------------------------------|
| 3.1 | 内导体 Inner conductor | 铍铜镀金 Beryllium copper gold plating |
| 3.2 | 外导体 Outer conductor | 不锈钢钝化 Stainless steel passivation  |
| 3.3 | 绝缘体 Insulator       | 聚四氟乙烯 PTFE                         |