


SMA/SSMA-KK SMA 母頭轉 SSMA 母頭 SSMA/SMA-KK SSMA 轉 SMA  
連接器

## SMA/SSMA-KK

- ① SMA母
- ② SSMA母



## SMA Female to SSMA Female RF Connector Adapter

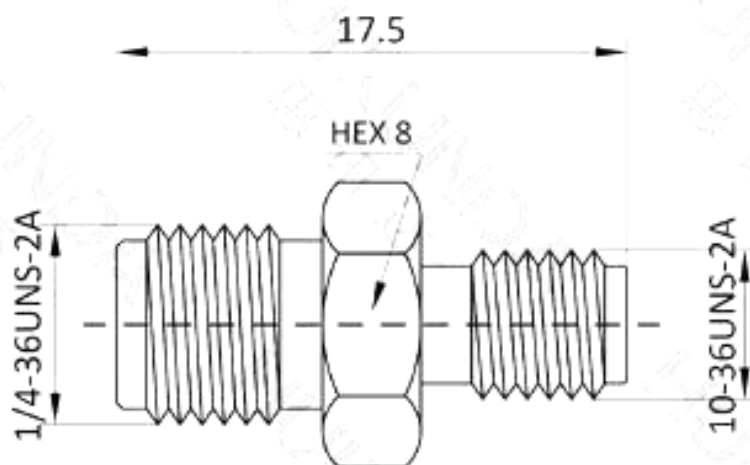

**Interface 界面**

**According to 根据**

IEC 60169-15 & IEC 60169-18

**Electrical 电气**

**Characteristic Impedance 特性阻抗**

50 ohm

**Frequency Range 频率范围**

DC-6GHz

**Dielectric Withstanding Voltage 介质耐压**

≥750V RMS,50hz,at sea level

**Working Voltage 工作电压**

≤250V RMS,50Hz,at sea level

**Dielectric Resistance 介电常数**

≥1000MΩ

**Contact Resistance 接触电阻**

**Center Contact 中心** ≤3mΩ

**Outer Contact 外部** ≤2.5mΩ

**Environmental 环境 & Mechanical 机械**

**Temperature Range 温度范围**

-45°C ~ +125°C

**Durability 耐久性**

≥500 cycles

**ROHS compliant 符合 ROHS**

Full ROHS compliance

**Material and Plating 材料及涂镀**

**Material 材料**

**Plating 电镀**

**Body 壳体**

Brass 黄铜

Au 金

**Insulator 绝缘体**

PTFE 聚四氟乙烯

-

**Center conductor 中心导体**

Brass 黄铜

Au 金