


SMA/SSMC-KJ SMA 母轉 SSMC 公高頻精密轉接器 17g SSMC 轉 SMA 連

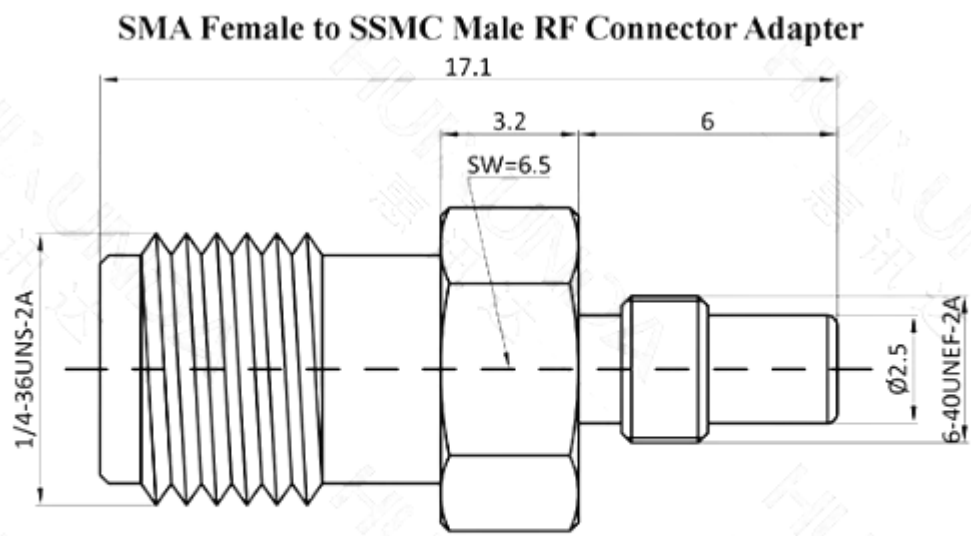

Interface 界面		
According to 根据	IEC60169-15 & EN 122180 , IEC 60169-20	
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-17GHz	
VSWR 电压驻波比	$\leq 1.15 @ DC-6GHz$; $\leq 1.25 @ 17GHz$	
Dielectric Withstanding Voltage 介质耐压	$\geq 750V$ RMS,50hz,at sea level	
Dielectric Resistance 介电常数	$\geq 1000M\Omega$	
Contact Resistance 接触电阻	Center Contact 中心	$\leq 3m\Omega$
	Outer Contact 外部	$\leq 2m\Omega$
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	$-45^{\circ}C \sim +125^{\circ}C$	
Durability 耐久性	≥ 500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
Body 壳体	Material 材料	Plating 电镀
Insulator 绝缘体	Brass 黄铜	Au 金
Center conductor 中心导体	PTFE 聚四氟乙烯	—
	Phosphorus Copper 磷铜	Au 金

接器

CH1 S22 SWR 546.6 m / REF 1 1: 1.2024 17.000 000 000 GHz

PRm

Cor

↑

MARKER 1
17 GHz

