


SMA/SSMC-KK SMA 母轉 SSMC 母高頻精密轉接器 17g SSMC 轉 SMA 連接器



Interface 界面	IEC60169-15 & EN 122180 , IEC 60169-20	
According to 根据		
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-17GHz	
VSWR 电压驻波比	≤1.15@DC-6GHz; ≤1.25@17GHz	
Dielectric Withstanding Voltage 介质耐压	≥750V RMS,50hz,at sea level	
Dielectric Resistance 介电常数	≥1000MΩ	
Contact Resistance 接触电阻	Center Contact 中心	≤3mΩ
	Outer Contact 外部	≤2mΩ
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-45°C ~ +125°C	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
Body 壳体	Material 材料	Plating 电镀
Insulator 绝缘体	Brass 黄铜	Au 金
Center conductor 中心导体	PTFE 聚四氟乙烯	—
	Phosphorus Copper 磷铜	Au 金

[CH1] S22 SWR 546.6 m / REF 1 1: 1.2024 17.000 000 000 GHz

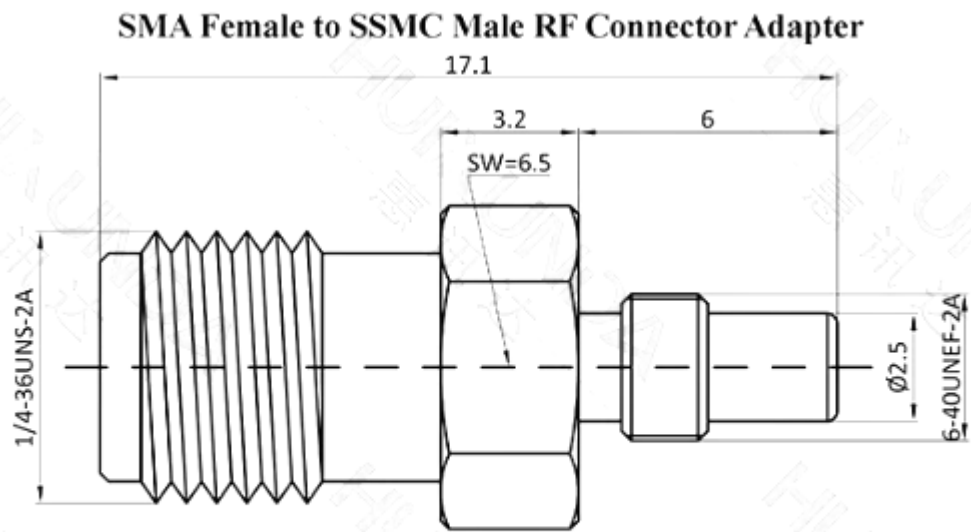