


轉接器 BNC/SMA-KYK-2 Q9/BNC 母轉 SMA 母 帶防水圈穿牆 4G

产品规格书

PRODUCT SPECIFICATION

产品型号 Model: BNC/SMA-KYK-2

频率 Frequency: DC-4GHz

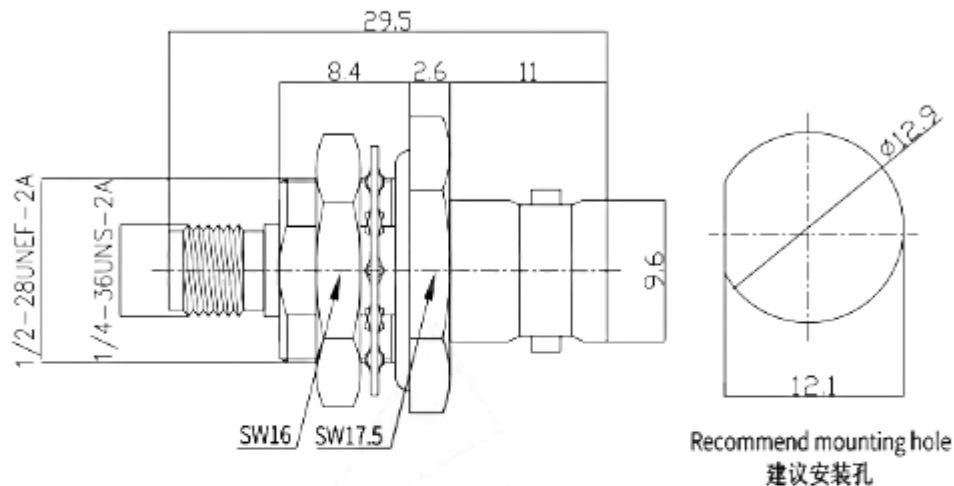

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1. 电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-4GHz
1.3	驻波 VSWR	≤1.25
1.4	介质耐压 Dielectric withstanding voltage	1000V(rms)
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2. 环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°→+125°
2.2	耐久性 Durability	500cycles

3. 材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀镍 Brass nickel plated
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

测试图

产品型号: BNC/SMA-KYK-2

