


射頻轉接頭 N/SMA-KYK-4 N 母轉 SMA 母 防水圈主機殼固定 6G

产品规格书

PRODUCT SPECIFICATION

产品型号 Model: N/SMA-KYK-4

频率 Frequency: DC-6GHz

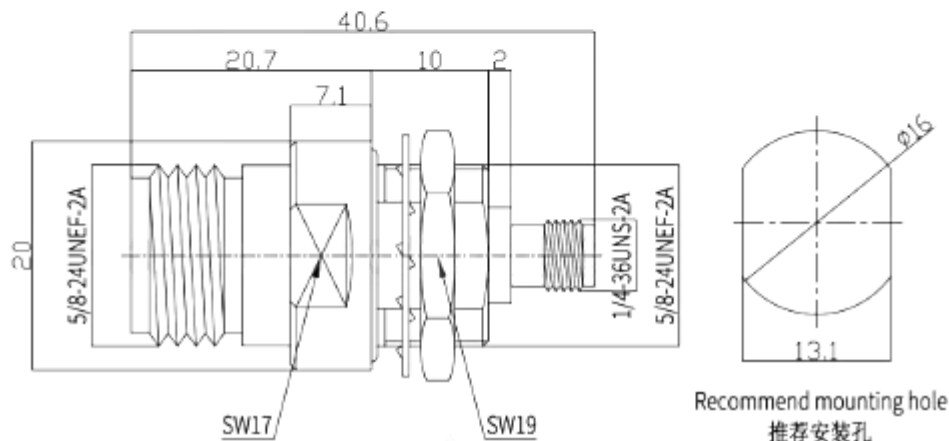

Recommend mounting hole
推荐安装孔

注 Note: 尺寸 Dimensions (mm)

产品参数 Product parameters

1.电气 Electrical

1.1	阻抗 Impedance	50Ω
1.2	频率范围 Frequency range	DC-6GHz
1.3	驻波 VSWR	≤1.2
1.4	介质耐压 Dielectric withstanding voltage	1000V(rms)
1.5	内导体接触电阻 Internal conductor contact resistance	≤3mΩ
1.6	外导体接触电阻 External conductor contact resistance	≤2mΩ
1.7	绝缘电阻 Insulation resistance	≥5000MΩ

2.环境与机械 Environment and Machinery

2.1	温度范围 Temperature range	-45°~+125°
2.2	耐久性 Durability	500cycles

3.材料和镀层 Material and Plating

3.1	内导体 Inner conductor	磷铜镀金 Phosphorus copper gold plating
3.2	外导体 Outer conductor	黄铜镀三元合金 Brass plated with ternary alloy
3.3	绝缘体 Insulator	聚四氟乙烯 PTFE

产品测试图

PRODUCT TESTING FIGURE

产品型号: N/SMA-KYK-4

