
					_
SM	ΛО	വ	$\cap$	$\alpha$	c
OIVI	HΩ	SU	リーい	w	()

2 Watt 50ohm SMA Jack Termination 3GHz VSWR 1.1; 6GHz VSWR 1.15

50Ω

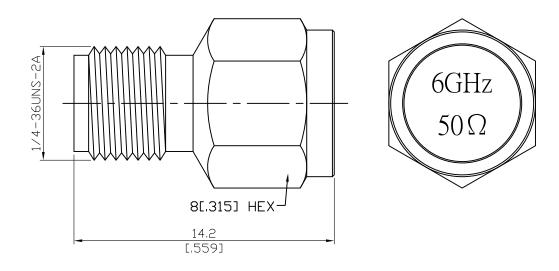

2W average power from -55°C to +70°C linearly derated to 1 Watt at 165°C

Parts	Material	Plating ( Micro-inch )
Contact Pin	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20
Insulator	Teflon	
Body	Brass	Gold 4 Over Nickel-Phosphorus Alloy 80 Over Copper 20

Weight: 3.04g

## SMA

## SMA8900-0006

# Interface

MIL-STD-348B

Mechanically compatible with 2.92 & 3.5

## **Electrical Data**

Impedance  $50\Omega$ 

Frequency range DC to 6GHz

VSWR  $\leq 1.1 \text{ (DC to 3GHz)}; \leq 1.15 \text{ (3~6GHz)}$ 

500 V rms

Insertion loss  $\leq 0.04 \text{ x} \sqrt{f(GHz)} \text{ dB}$ 

 $\begin{array}{ll} \mbox{Insulation resistance} & \geq 5000 \mbox{M}\Omega \\ \mbox{Contact resistance inner conductor} & \leq 3 \mbox{m}\Omega \\ \mbox{Contact resistance outer conductor} & \leq 2 \mbox{m}\Omega \\ \mbox{Dielectric withstanding voltage (at sea level)} & 1500 \ \mbox{V rms} \end{array}$ 

Working voltage (at sea level)

#### Mechanical Data

Recommended coupling nut torque4 inch lbsCoupling proof torque5.3 inch lbsCoupling nut retention force $\geq 60.7$  lbsContact Captivation-axial $\geq 6.1$  lbsDurability (mating) $\geq 100$ 

## **Environmental Data**

Temperature range -55°C to +165°C

Thermal shock MIL-STD-202, Method 107, Condition B

Moisture resistance MIL-STD-202, Method 106

Corrosion MIL-STD-202, Method 101, Condition B

RoHS Compliant

## **Tooling**

勝特力電材超市-龍山店 886-3-5773766 勝特力電材超市-光復店 886-3-5729570 胜特力电子(上海) 86-21-34970699 胜特力电子(深圳) 86-755-83298787 http://www.100y.com.tw