


SMA SMB BNC N TNC 轉杜邦線杜邦母連接線轉接線公頭母頭延長線

长度	0.2m	0.3m	0.4m	0.5m	0.6m	0.8m	1m	1.2m		
	1.5m	1.8m	2m	3m	4m	5m	6m	7m	8m	9m
	10m	11m	12m	13m	14m					


153923	SMB-J+杜邦(F)-0.3M	SMB 公 轉杜邦母-轉接線-0.3M
153924	SMB-J+杜邦(F)-0.5M	SMB 公 轉杜邦母-轉接線-0.5M
153925	SMB-J+杜邦(F)-0.6M	SMB 公 轉杜邦母-轉接線-0.6M
153926	SMB-J+杜邦(F)-0.8M	SMB 公 轉杜邦母-轉接線-0.8M
153927	SMB-J+杜邦(F)-1.0M	SMB 公 轉杜邦母-轉接線-1M
153928	SMB-K+杜邦(F)-0.3M	SMB 母 轉杜邦母-轉接線-0.3M
153929	SMB-K+杜邦(F)-0.5M	SMB 母 轉杜邦母-轉接線-0.5M
153930	SMB-K+杜邦(F)-0.6M	SMB 母 轉杜邦母-轉接線-0.6M
153931	SMB-K+杜邦(F)-0.8M	SMB 母 轉杜邦母-轉接線-0.8M
153932	SMB-K+杜邦(F)-1.0M	SMB 母 轉杜邦母-轉接線-1M

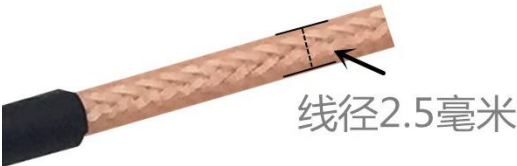


线材型号：RG316(SFF-50-1.5)
材 质：纯铜、镀银、耐高温
每米衰减：0.145dB/米
频 率：0-3GHz
阻 抗：50欧姆



SMB-J

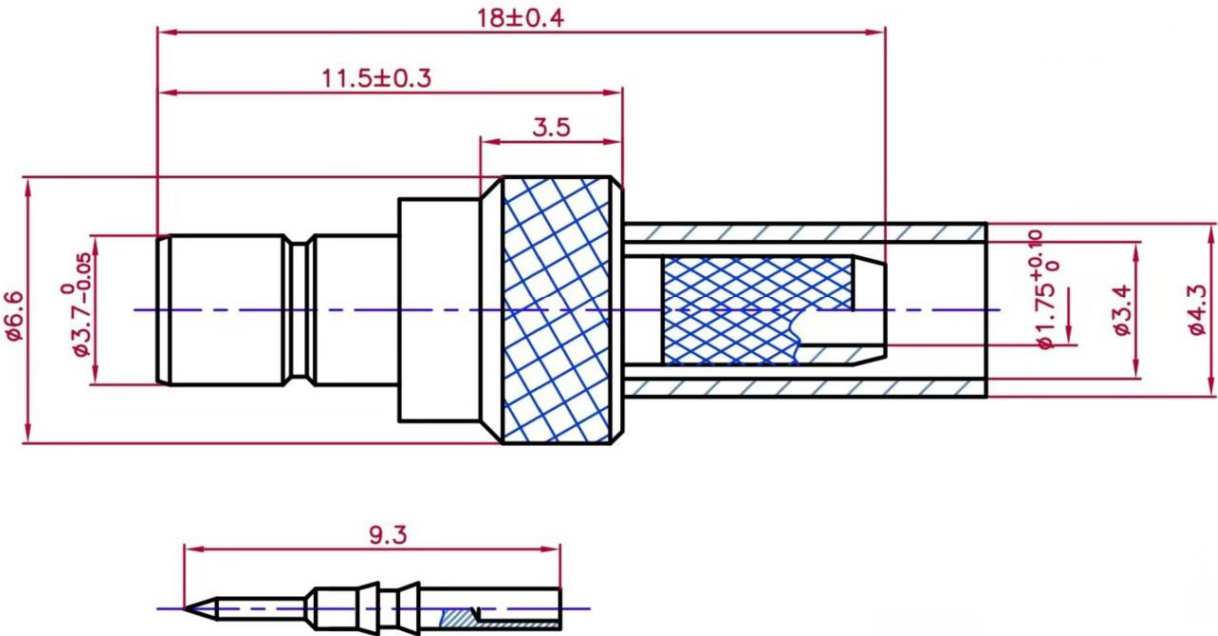

SMB-K

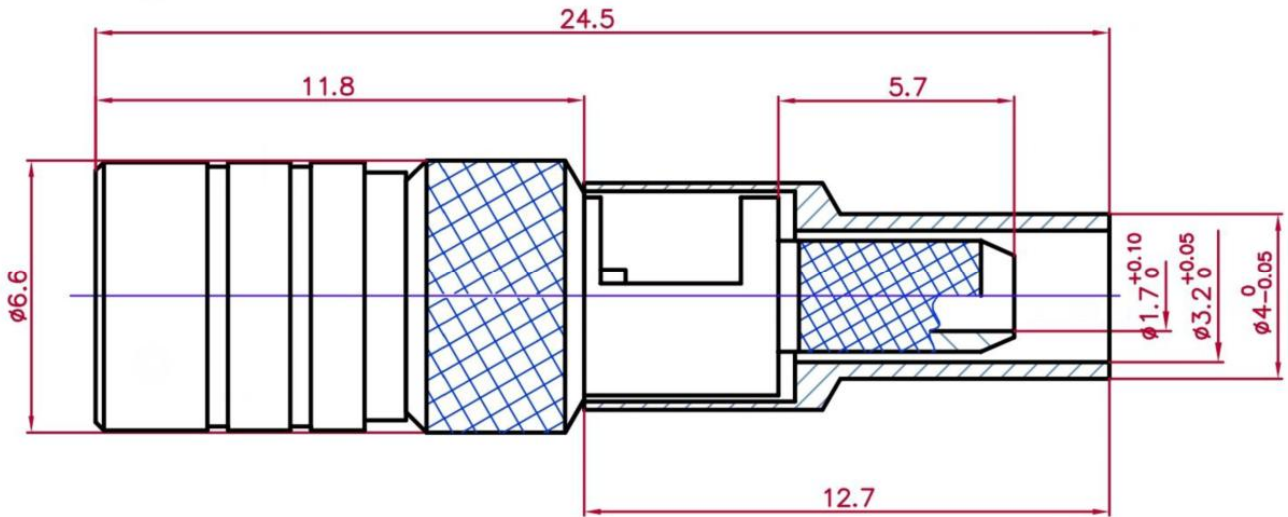

产品规格 Product Type		RG316/F/50双银线		
结构图 Structure Drawing				
结构特性 Structure Characteristics				
结构 Structure	项目Item	标准值Standard Value		
内导体 Inner Conductor	材质Material	镀银铜线Silverplated Copper Wire		
	结构Construction(mm)	7/0.17		
	标称外径Nom.Dia(mm)	0.51±0.02		
绝缘层 Insulation	材质Material	聚全氟乙烯FEP		
	标称外径Nom.Dia(mm)	1.52±0.05		
外导体 Outer Conductor	材质Material	镀银铜线Silverplated Copper Wire 16*5/0.10		
	标称外径Nom.Dia(mm)	1.95±0.10		
	编织覆盖率Coverage Ratio(%)	90±5		
护套 Jacket	材质Material	聚全氟乙烯FEP		
	标称外径Nom.Dia(mm)	2.50±0.10		
电气性能 Electrical Characteristics				
项目Item	标准值 Standard Value	项目Item	频率 Frequency	标准值 Standard Value
阻抗Impedanc (Ω)	50±2	衰减 Attenuation@20℃ (dB/m)	0.1GHz	0.262
电容Capacitance(pF/m)	95		0.4GHz	0.531
速率Velocity(%)	70		1GHz	0.860
驻波比VSWR	≤1.20@DC-3GHz		3GHz	1.650
最大工作电压 Max.Operating Voltage(V)	1200		5GHz	2.80
最大工作频率 Max.Operating Frequency(GHz)	3		6GHz	3.20
可靠性 Dependability				
最小弯曲半径(单次)Min.Bending Radius/Single	mm	15		
最小弯曲半径 (重复) Min.Bending Radius/Repeated	mm	50		
工作温度范围Operating Temperature	℃	-55-+200		
包装Packing				
包装方式Packing Mode	纸盘Papery Reel			
包装长度The Length of Each Reel(m)	300			
每盘段数The Joints of Each Reel	≤3			
最小段长Min. Segment Length(m)	≥20			