


SSMA-C-K-1.5 SSMA 母頭壓接 50-1.5/RG316 線纜

SSMA 連接器 SSMA-K3

SSMA-C-K-1.5

1 SSMA母

2 匹配RG316/50-1.5等线缆

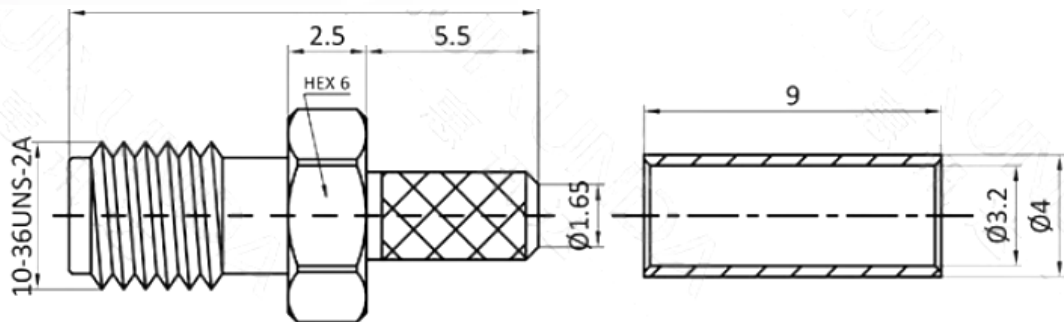

Interface 界面	
According to 根据	IEC 60169-23
Electrical 电气	
Characteristic Impedance 特性阻抗	50 ohm
Frequency Range 频率范围	DC-6GHz
VSWR 电压驻波比	≤1.3
Dielectric Withstanding Voltage 介质耐压	≥750V RMS,50hz,at sea level
Dielectric Resistance 介电常数	≥1000MΩ
Contact Resistance 接触电阻	Center Contact 中心 ≤4mΩ Outer Contact 外部 ≤2.5mΩ
Environmental 环境 & Mechanical 机械	
Temperature Range 温度范围	-55°C ~ +125°C
Durability 耐久性	≥500 cycles
ROHS compliant 符合 ROHS	Full ROHS compliance
Material and Plating 材料及涂镀	
	Material 材料 Plating 电镀
Body 壳体	Bllium-copper 铍铜 Au 金