

PC123/PC123F

※ DIN-VDE0884 approved type (PC123Y/PC123FY) is also available as an option.

■ Features

1. Conform to European Safety Standard
2. Internal isolation distance: 0.4mm or more
3. High collector-emitter voltage (V_{CEO} : 70V)
4. Long creepage distance type
5. Recognized by UL (No. E64380)

Approved by VDE (DIN-VDE83601)

Approved by BSI

(BS415 No. 7087, BS7002 No. 7409)

Approved by SEMCO (No. 9216212)

Approved by DEMCO (No. 108954)

Approved by EI (No. 155030)

Recognized by CSA (No. CA95323)

■ Model Line-up

Model No.	*Creepage distance	*Clearance distance
PC123	6.4mm or more	6.4mm or more
PC123F	8mm or more	8mm or more

* Between input and output

■ Applications

1. Power supplies
2. OA equipment

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ Absolute Maximum Ratings

($T_a=25^{\circ}\text{C}$)

	Parameter	Symbol	Rating	Unit
Input	Forward current	I_F	50	mA
	*1 Peak forward current	I_{FM}	1	A
	Reverse voltage	V_R	6	V
	Power dissipation	P	70	mW
Output	Collector-emitter voltage	V_{CEO}	70	V
	Emitter-collector voltage	V_{ECO}	6	V
	Collector current	I_C	50	mA
	Collector power dissipation	P_C	150	mW
	Total power dissipation	P_{tot}	200	mW
*2	Isolation voltage	V_{iso} (rms)	5	kV
	Operating temperature	T_{opr}	-30 to +100	$^{\circ}\text{C}$
	Storage temperature	T_{stg}	-55 to +125	$^{\circ}\text{C}$
*3	Soldering temperature	T_{sol}	260	$^{\circ}\text{C}$

*1 Pulse width $\leq 100\mu\text{s}$, Duty ratio: 0.001


*2 40 to 60%RH, AC for 1 minute

*3 For 10s

European Safety Standard Approved Type Long Creepage Distance Photocoupler

■ Outline Dimensions

(Unit : mm)

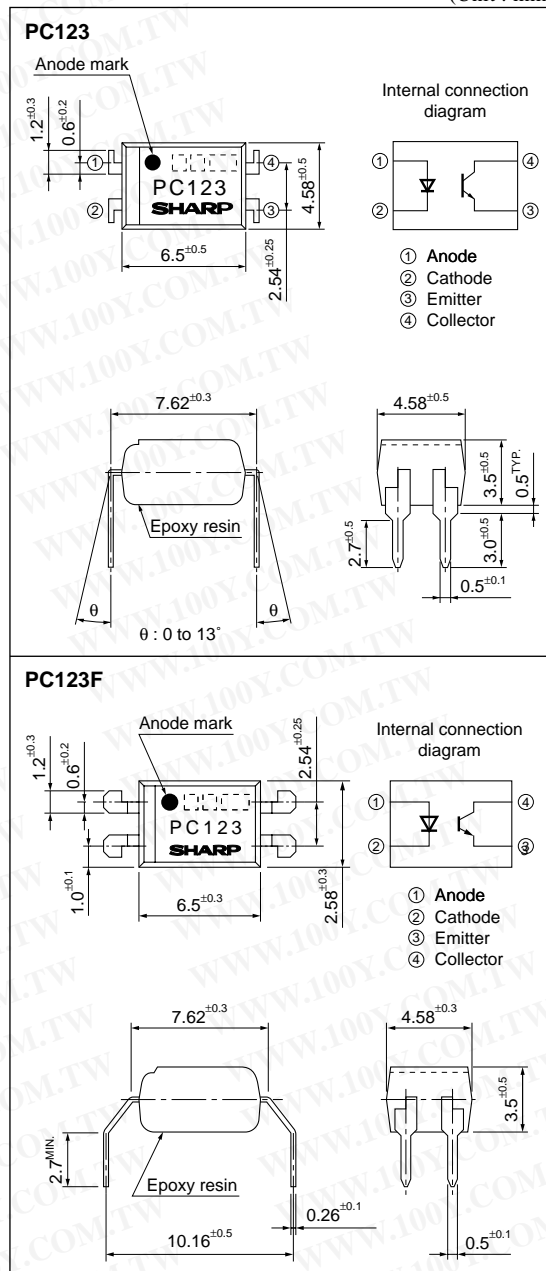

■ Electro-optical Characteristics

($T_a=25^{\circ}\text{C}$)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit
Input	Forward voltage	V_F	$I_F=20\text{mA}$	—	1.2	1.4	V
	Reverse current	I_R	$V_R=4\text{V}$	—	—	10	μA
	Terminal capacitance	C_t	$V=0, f=1\text{kHz}$	—	30	250	pF
Output	Collector dark current	I_{CEO}	$V_{CE}=50\text{V}, I_F=0$	—	—	100	nA
	Collector-emitter breakdown voltage	BV_{CEO}	$I_C=0.1\text{mA}, I_F=0$	70	—	—	V
	Emitter-collector breakdown voltage	BV_{ECO}	$I_E=10\mu\text{A}, I_F=0$	6	—	—	V
Transfer characteristics	Collector current	I_C	$I_F=5\text{mA}, V_{CE}=5\text{V}$	2.5	—	20	mA
	Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_F=20\text{mA}, I_C=1\text{mA}$	—	0.1	0.2	V
	Isolation resistance	R_{ISO}	DC500V, 40 to 60%RH	5×10^{10}	10^{11}	—	Ω
	Floating capacitance	C_f	$V=0, f=1\text{MHz}$	—	0.6	1.0	pF
	Cut-off frequency	f_c	$V_{CE}=5\text{V}, I_C=2\text{mA}, R_L=100\Omega, -3\text{dB}$	—	80	—	kHz
	Response time	Rise time	t_r	$V_{CE}=2\text{V}, I_C=2\text{mA}, R_L=100\Omega$	—	4	18
Fall time		t_f	—		3	18	μs

■ Rank Table

($I_F=5\text{mA}, V_{CE}=5\text{V}, T_a=25^{\circ}\text{C}$)

Model No.	Rank mark	I_C (mA)
PC123 / PC123Y / PC123F / PC123FY	A, B, S or no mark	2.5 to 20.0
PC123A / PC123Y1 / PC123F1 / PC123FY1	A	2.5 to 7.5
PC123B / PC123Y2 / PC123F2 / PC123FY2	B	5.0 to 12.5
PC123C / PC123Y5 / PC123F5 / PC123FY5	no mark	10.0 to 20.0
PC123S / PC123YS / PC123FS / PC123FY8	S	5.0 to 10.0

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig.1 Forward Current vs. Ambient Temperature

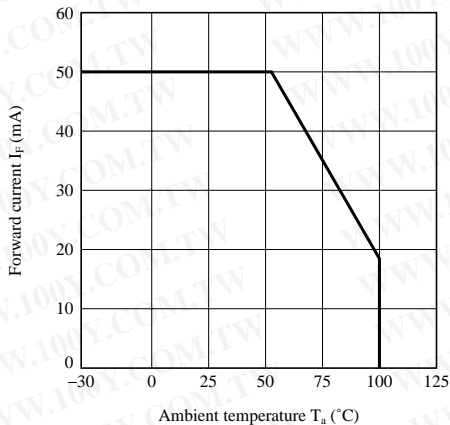


Fig.2 Diode Power Dissipation vs. Ambient Temperature

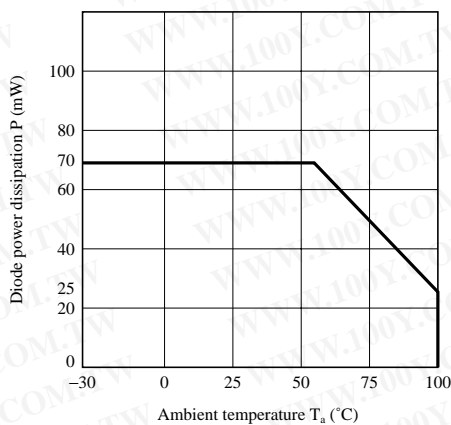


Fig.3 Collector Power Dissipation vs. Ambient Temperature

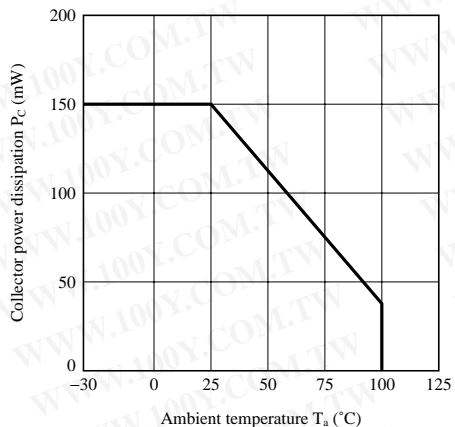


Fig.4 Power Dissipation vs. Ambient Temperature

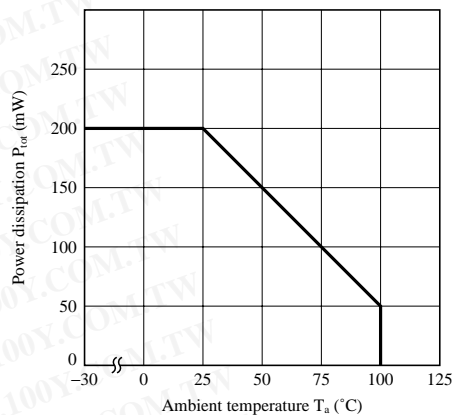


Fig.5 Peak Forward Current vs. Duty Ratio

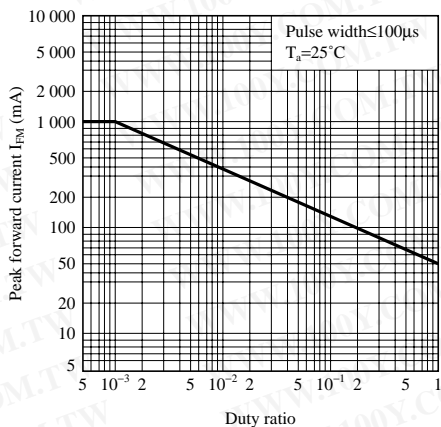


Fig.6 Forward Current vs. Forward Voltage

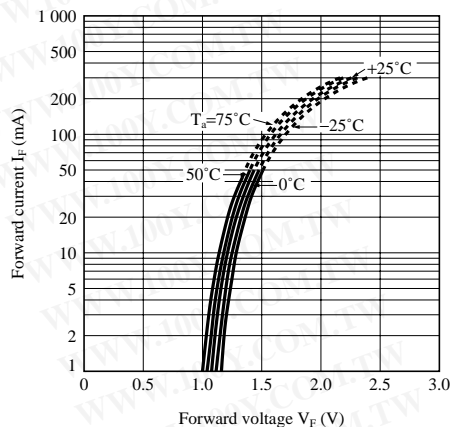


Fig.7 Current Transfer Ratio vs. Forward Current

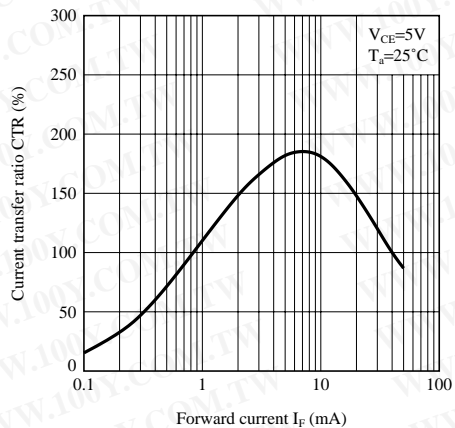


Fig.8 Collector Current vs. Collector-emitter Voltage

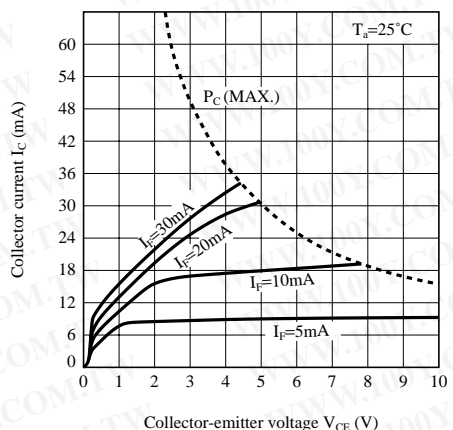


Fig.9 Relative Current Transfer Ratio vs. Ambient Temperature

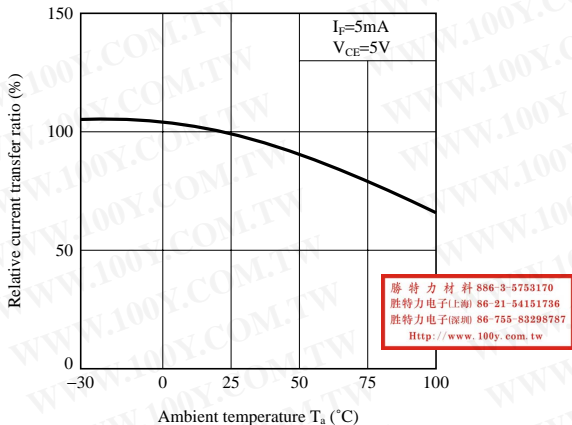


Fig.10 Collector-emitter Saturation Voltage vs. Ambient Temperature

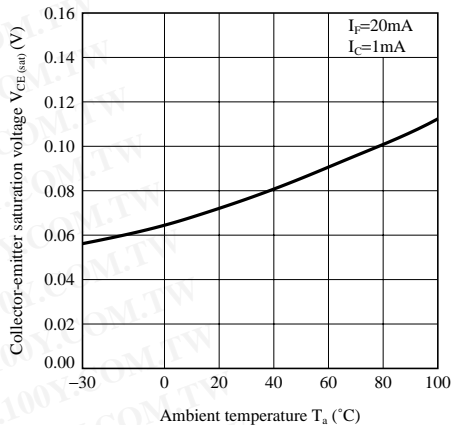


Fig.11 Collector Dark Current vs. Ambient Temperature

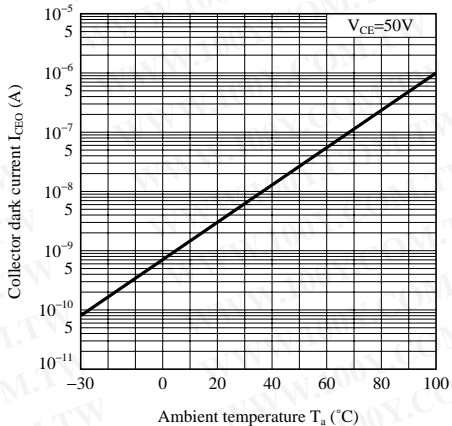


Fig.12 Response Time vs. Load Resistance

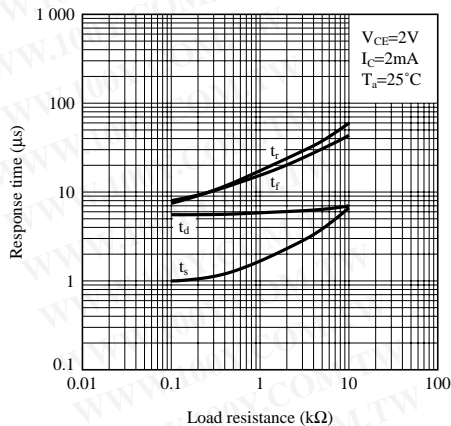


Fig.13 Frequency Response


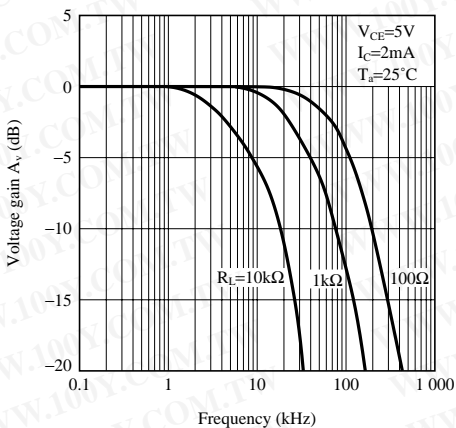


Fig.14 Collector-emitter Saturation Voltage vs. Forward Current

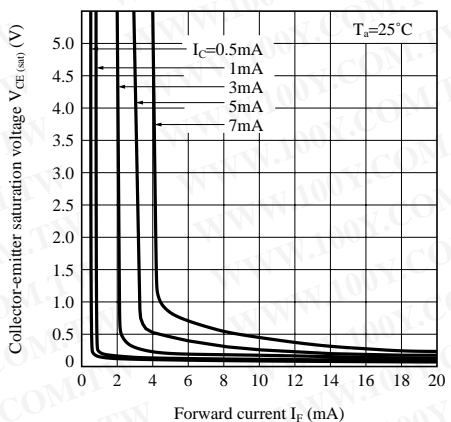

NOTICE

- The circuit application examples in this publication are provided to explain representative applications of SHARP devices and are not intended to guarantee any circuit design or license any intellectual property rights. SHARP takes no responsibility for any problems related to any intellectual property right of a third party resulting from the use of SHARP's devices.
- Contact SHARP in order to obtain the latest device specification sheets before using any SHARP device. SHARP reserves the right to make changes in the specifications, characteristics, data, materials, structure, and other contents described herein at any time without notice in order to improve design or reliability. Manufacturing locations are also subject to change without notice.
- Observe the following points when using any devices in this publication. SHARP takes no responsibility for damage caused by improper use of the devices which does not meet the conditions and absolute maximum ratings to be used specified in the relevant specification sheet nor meet the following conditions:
 - (i) The devices in this publication are designed for use in general electronic equipment designs such as:
 - Personal computers
 - Office automation equipment
 - Telecommunication equipment [terminal]
 - Test and measurement equipment
 - Industrial control
 - Audio visual equipment
 - Consumer electronics
 - (ii) Measures such as fail-safe function and redundant design should be taken to ensure reliability and safety when SHARP devices are used for or in connection with equipment that requires higher reliability such as:
 - Transportation control and safety equipment (i.e., aircraft, trains, automobiles, etc.)
 - Traffic signals
 - Gas leakage sensor breakers
 - Alarm equipment
 - Various safety devices, etc.
 - (iii) SHARP devices shall not be used for or in connection with equipment that requires an extremely high level of reliability and safety such as:
 - Space applications
 - Telecommunication equipment [trunk lines]
 - Nuclear power control equipment
 - Medical and other life support equipment (e.g., scuba).
- If the SHARP devices listed in this publication fall within the scope of strategic products described in the Foreign Exchange and Foreign Trade Law of Japan, it is necessary to obtain approval to export such SHARP devices.
- This publication is the proprietary product of SHARP and is copyrighted, with all rights reserved. Under the copyright laws, no part of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, for any purpose, in whole or in part, without the express written permission of SHARP. Express written permission is also required before any use of this publication may be made by a third party.
- Contact and consult with a SHARP representative if there are any questions about the contents of this publication.

勝特力材料 886-3-5753170
勝特力電子(上海) 86-21-54151736
勝特力電子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)