


# SSMA-KK SSMA 母轉母 SSMA 雙通頭 SSMA 雙陰直通 SSMA-KYK 連接器

## SSMA-KK

- 1 SSMA母
- 2 SSMA母



SSMA Female To Female Adaptor

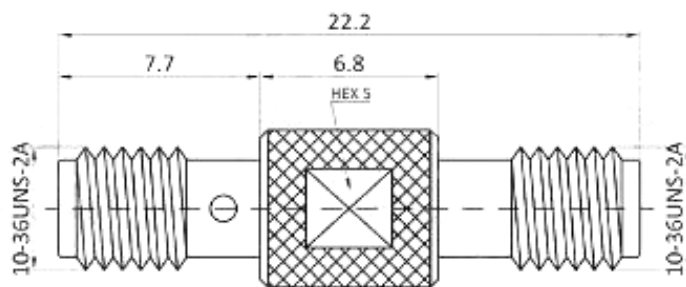

### Interface 界面

According to 根据 IEC 60169-23

### Electrical 电气

Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-6GHz	
VSWR 电压驻波比	≤1.2	
Dielectric Withstanding Voltage 介质耐压	≥750V RMS,50hz,at sea level	
Dielectric Resistance 介电常数	≥1000MΩ	
Contact Resistance 接触电阻	Center Contact 中心	≤4mΩ
	Outer Contact 外部	≤2.5mΩ

### Environmental 环境 & Mechanical 机械

Temperature Range 温度范围	-55°C ~ +125°C
Durability 耐久性	≥500 cycles
ROHS compliant 符合ROHS	Full ROHS compliance

### Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Bllium-copper 铍铜	Au 金
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金