


SSMB-C-J-1.5 SSMB 公頭壓接 50-1.5/RG316 電纜 SSMB-J3 連接器 J-1.5

SSMB Male Crimp Connector For 50-1.5/RG316 Cable

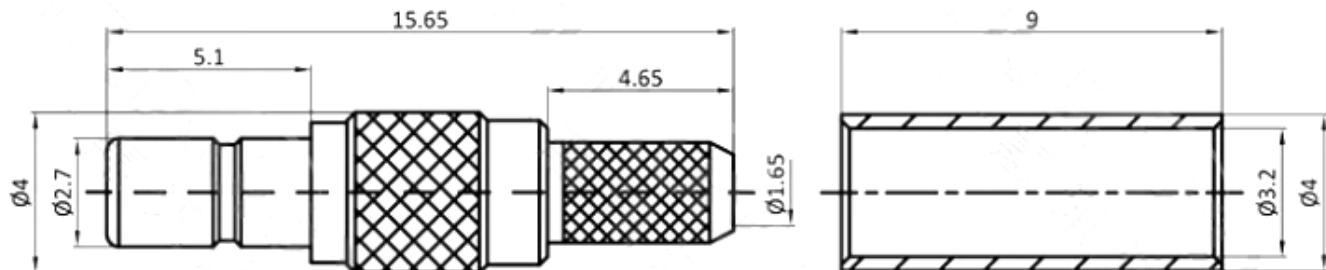

Interface 界面

According to 根据

IEC 61169-19

Electrical 电气

Characteristic Impedance 特性阻抗	50 ohm
Frequency Range 频率范围	DC-6GHz
VSWR 电压驻波比	≤1.25
Dielectric Withstanding Voltage 介质耐压	≥750V RMS,50hz,at sea level
Working Voltage 工作电压	≤250V RMS,50Hz,at sea level
Dielectric Resistance 介电常数	≥1000MΩ
Contact Resistance 接触电阻	Center Contact 中心: ≤5mΩ Outer Contact 外部: ≤2.5mΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围	-45°C ~ +125°C
Durability 耐久性	≥500 cycles
ROHS compliant 符合 ROHS	Full ROHS compliance

Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Au 金
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金