

SSMC-C-J-1.5 SSMC 公头压接 50-1.5/RG316 线 SSMC-J3 连接器

SSMC-C-J-1.5

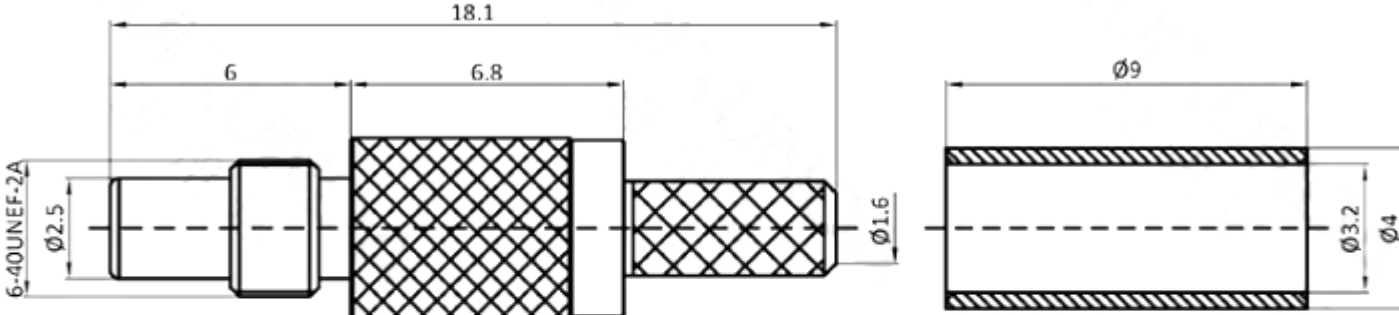
1

SSMC公

2

匹配RG316/50-1.5等线缆

0.1μ金

SSMC Male Connector For 50-1.5/RG316 Cable		
		
Interface 界面	EN 122180 & IEC 60169-20	
According to 根据		
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-6GHz	
VSWR 电压驻波比	≤1.2	
Dielectric Withstanding Voltage 介质耐压	≥500V RMS,50hz,at sea level	
Working Voltage 工作电压	≤175V RMS,50Hz,at sea level	
Dielectric Resistance 介电常数	≥1000MΩ	
Contact Resistance 接触电阻	Center Contact 中心	≤5mΩ
	Outer Contact 外部	≤2.5mΩ
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-55°C ~ +125°C	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
Body 壳体	Material 材料	Plating 电镀
	Brass 黄铜	Au 金
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Phosphorus Copper 磷铜	Au 金