


SSMC-C-K-1.5 SSMC 母头压接 50-1.5/RG316 线 SSMC-K3 连接器
0.1μ金

SSMC-C-K-1.5

- 1 SSMC母
- 2 匹配RG316/50-1.5等线缆

SSMC Female Crimp Connector For 50-1.5/RG316 Cable

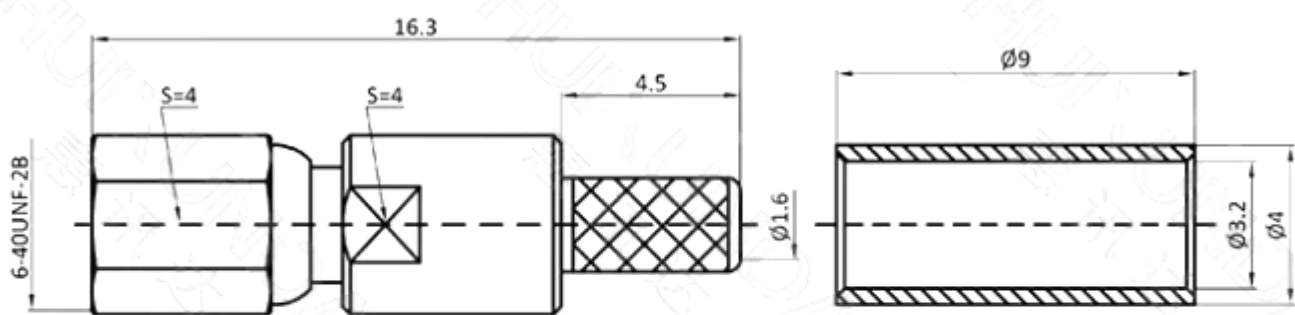

Interface 界面

According to 根据

EN 122180 & IEC 60169-20

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-6GHz

VSWR 电压驻波比

≤1.2

Dielectric Withstanding Voltage 介质耐压

≥500V RMS,50hz,at sea level

Working Voltage 工作电压

≤175V RMS,50Hz,at sea level

Dielectric Resistance 介电常数

≥1000MΩ

Contact Resistance 接触电阻

Center Contact 中心 ≤5mΩ

Outer Contact 外部 ≤2.5mΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-55°C ~ +125°C

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

Body 壳体

Material 材料

Brass 黄铜

Plating 电镀

Au 金

Insulator 绝缘体

PTFE 聚四氟乙烯

—

Center conductor 中心导体

Phosphorus Copper 磷铜

Au 金