

# PT380/PT380F PT381/PT381F

High Sensitivity,  $\phi$  3mm Resin Mold Type  
Phototransistor

## ■ Features

1. High sensitivity  
( $I_c$  : MIN.160 $\mu$ A at  $E_v = 100lx$ , **PT380**)  
( $I_c$  : MIN.120 $\mu$ A at  $E_v = 2lx$ , **PT381**)
2. Compact  $\phi$  3mm resin mold package
3. Intermediate acceptance ( $\Delta\theta$  : TYP.  $\pm 20^\circ$ )
4. Visible light cut-off type : **PT380F/PT381F**

## ■ Model Line-ups


	Single photo-transistor output	Darlington photo-transistor output
No visible light cut-off filter	<b>PT380</b>	<b>PT381</b>
Built-in visible light cut-off filter	<b>PT380F</b>	<b>PT381F</b>

## ■ Applications

1. Floppy disk drives
2. Optoelectronic switches
3. Infrared applied systems

## ■ Outline Dimensions

(Unit : mm)

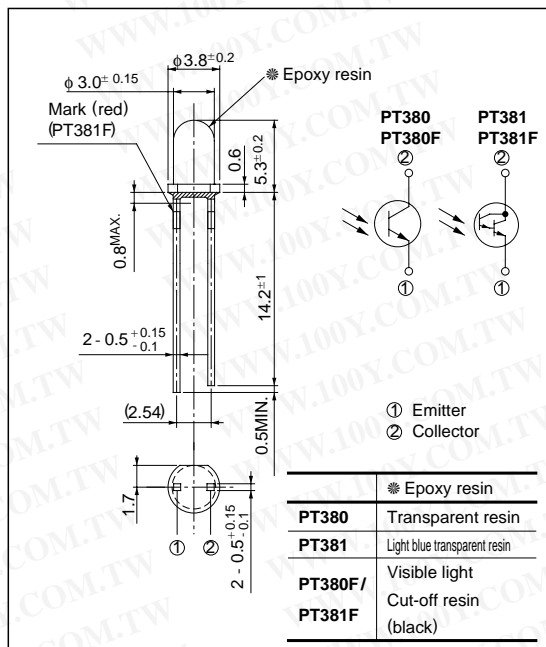

勝特力材料 886-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## ■ Absolute Maximum Ratings

( $T_a = 25^\circ C$ )

Parameter	Symbol	Rating	Unit
Collector-emitter voltage	$V_{CEO}$	35	V
Emitter-collector voltage	$V_{ECO}$	6	V
Collector current	$I_C$	20	mA
Collector power dissipation	$P_C$	50	mW
Operating temperature	$T_{opr}$	-25 to +85	$^\circ C$
Storage temperature	$T_{stg}$	-40 to +85	$^\circ C$
*1 Soldering temperature	$T_{sol}$	260	$^\circ C$

\*1 For 3 seconds at the position of 1.4mm from the bottom face of resin package

## ■ Electro-optical Characteristics

(Ta = 25°C)

Parameter		Symbol	Conditions	MIN.	TYP.	MAX.	Unit	
<sup>2</sup> Collector current	PT380	I <sub>C</sub>	E <sub>V</sub> = 100lx	0.16	-	1.17	mA	
	PT380F		V <sub>CE</sub> = 5V	0.095	-	0.90		
	PT381		E <sub>V</sub> = 2lx	0.12	-	1.5		
	PT381F		V <sub>CE</sub> = 10V	0.07	-	1.08		
Collector dark current	PT380/PT380F	I <sub>CEO</sub>	E <sub>e</sub> = 0, V <sub>CE</sub> = 20V	-	-	0.1	μA	
	PT381/PT381F		E <sub>e</sub> = 0, V <sub>CE</sub> = 10V	-	-	1.0		
<sup>2</sup> Collector-emitter saturation voltage	PT380/PT380F	V <sub>CE(sat)</sub>	E <sub>e</sub> = 10mW/cm <sup>2</sup> , I <sub>C</sub> = 0.5mA	-	0.2	0.4	V	
	PT381/PT381F		E <sub>e</sub> = 1mW/cm <sup>2</sup> , I <sub>C</sub> = 2.5mA	-	-	1.0		
Collector-emitter breakdown voltage		BV <sub>CEO</sub>	I <sub>C</sub> = 0.1mA E <sub>e</sub> = 0	35	-	-	V	
Emitter-Collector breakdown voltage		BV <sub>ECO</sub>	I <sub>C</sub> = 0.01mA E <sub>e</sub> = 0	6	-	-	V	
Peak sensitivity wavelength	PT380/PT381	λ <sub>P</sub>	-	-	800	-	nm	
	PT380F/PT381F			-	860	-		
Response time	Rise time	t <sub>r</sub>	V <sub>CE</sub> = 20V, I <sub>C</sub> = 1mA, R <sub>L</sub> = 1kΩ	-	10	40	μs	
			PT381/PT381F	V <sub>CE</sub> = 2V, I <sub>C</sub> = 10mA, R <sub>L</sub> = 100Ω	-	100		400
	Fall time	t <sub>f</sub>	PT380/PT380F	V <sub>CE</sub> = 20V, I <sub>C</sub> = 1mA, R <sub>L</sub> = 1kΩ	-	8		35
			PT381/PT381F	V <sub>CE</sub> = 2V, I <sub>C</sub> = 10mA, R <sub>L</sub> = 100Ω	-	100		400
Half intensity angle		Δθ	-	-	±20	-	°	

\*2 E<sub>V</sub>, E<sub>e</sub> : Illuminance, irradiance by CIE standard light source A (tungsten lamp)

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig. 1 Collector Power Dissipation vs. Ambient Temperature

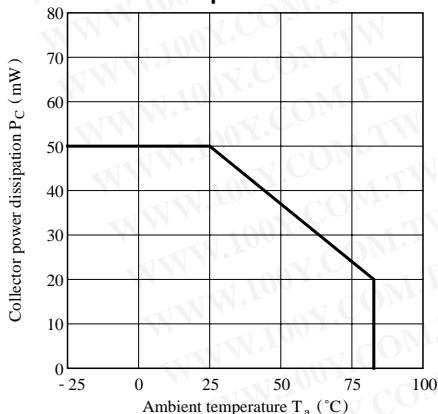


Fig. 2-a Collector Dark Current vs. Ambient Temperature (PT380/PT380F)

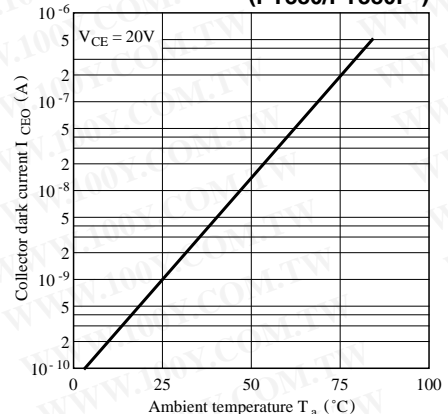


Fig. 2-b Collector Dark Current vs. Ambient Temperature (PT381/381F)

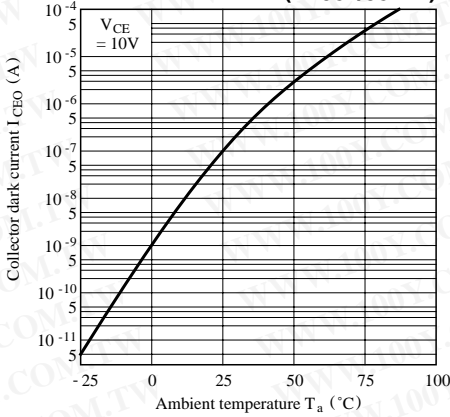


Fig. 3-a Relative Collector Current vs. Ambient Temperature (PT380/PT380F)

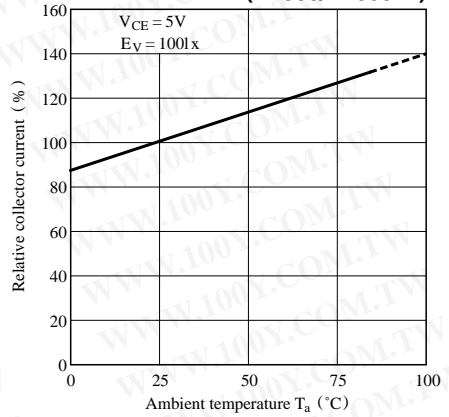


Fig. 3-b Relative Collector Current vs. Ambient Temperature (PT381/PT381F)

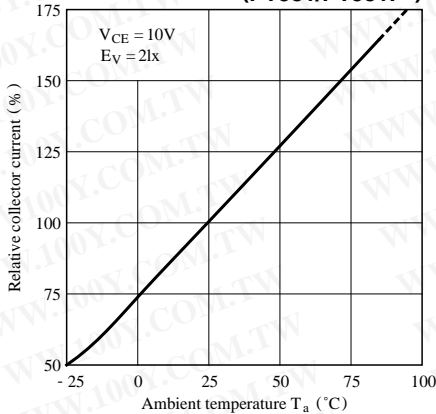


Fig. 4-a Collector Current vs. Irradiance (PT380/380F)

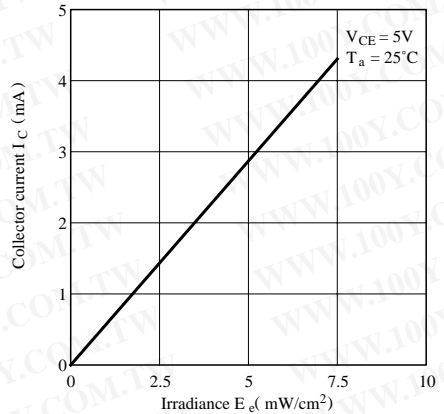


Fig. 4-b Collector Current vs. Irradiance (PT381/PT381F)

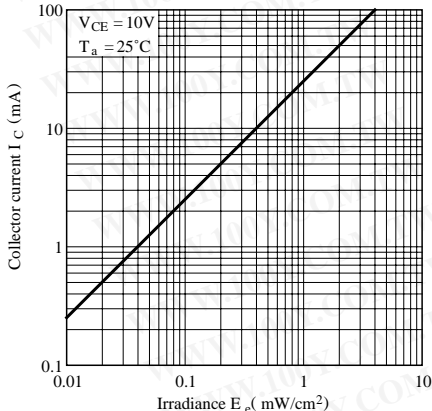


Fig. 5-a Collector Current vs. Collector-emitter Voltage (PT380/380F)

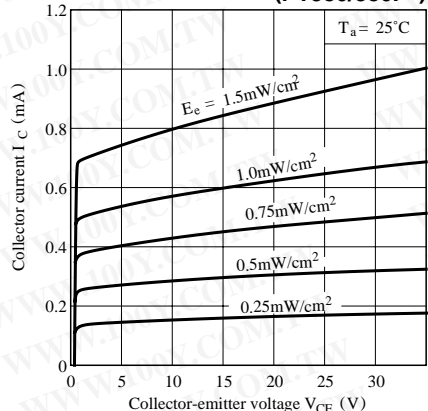


Fig. 5-b Collector Current vs. Collector-emitter Voltage (PT381/381F)

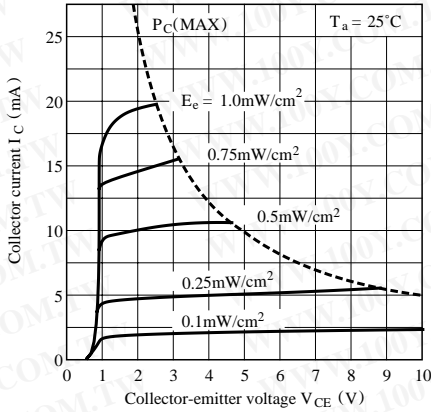


Fig. 6 Spectral Sensitivity



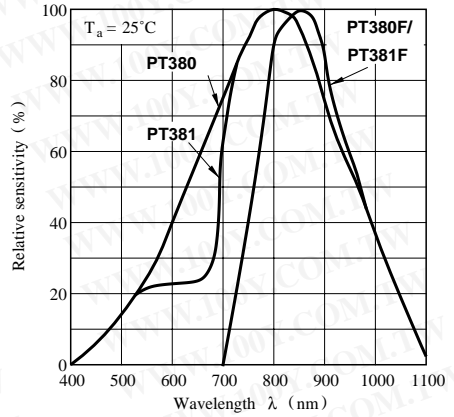


Fig. 7-a Response Time vs. Load Resistance (PT380/PT380F)

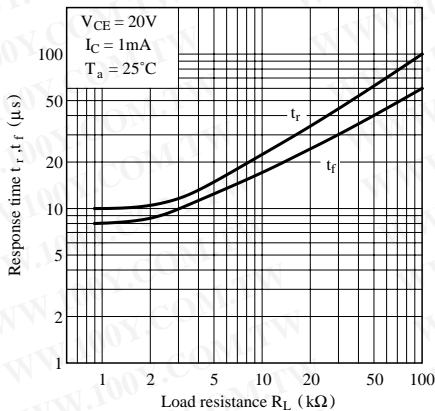


Test Circuit for Response Time

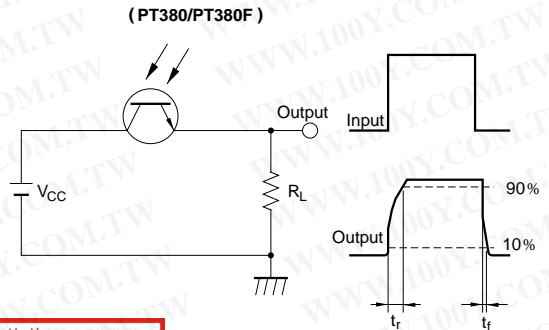

勝特力材料 866-3-5753170  
 胜特力电子(上海) 86-21-54151736  
 胜特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

Fig. 7-b Response Time vs. Load Resistance (PT381/381F)

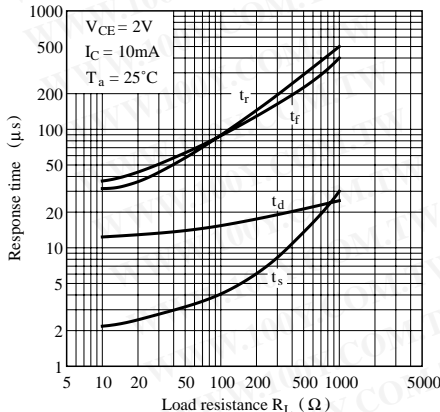

Test Circuit for Response Time

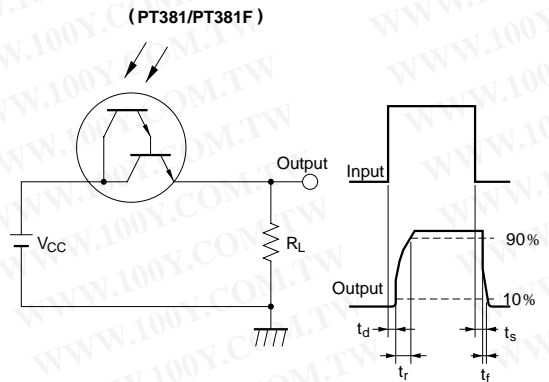


Fig. 8-a Collector-emitter Saturation Voltage vs. Irradiance (PT380/380F)

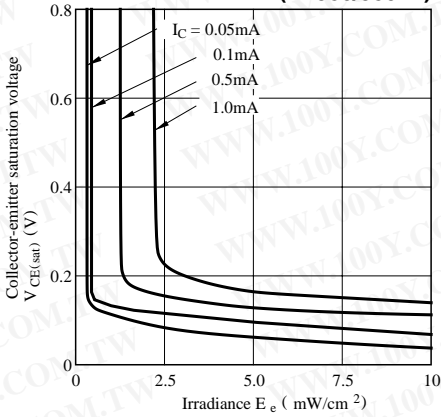


Fig. 8-b Collector-emitter Saturation Voltage vs. Irradiance (PT381/381F)

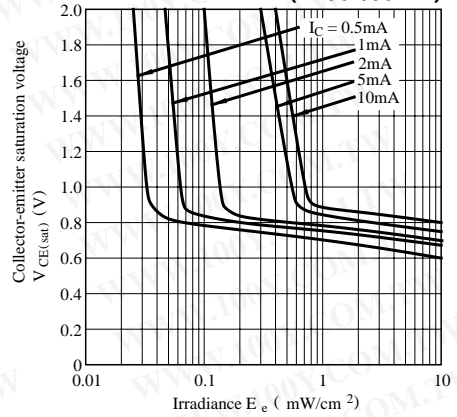


Fig. 9 Sensitivity Diagram (T<sub>a</sub> = 25°C)


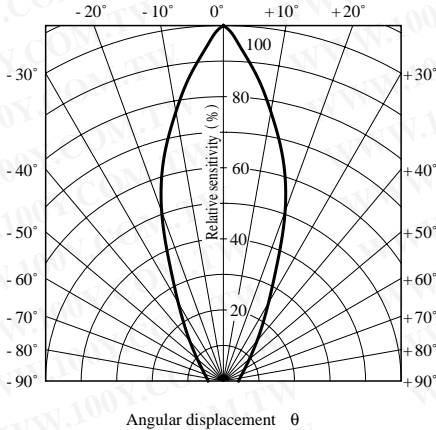


Fig.10 Relative Collector Current vs. Distance to Emitter (Emitter:GL380/GL381)

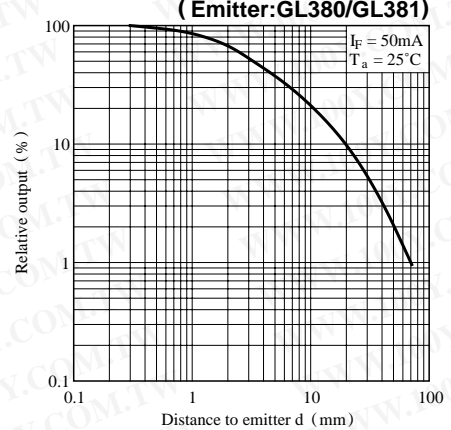

Please refer to the chapter “Precautions for Use.”

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-54151736  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)