


1

TNC公

2

匹配RG316/50-1.5等线缆

TNC-C-J-1.5

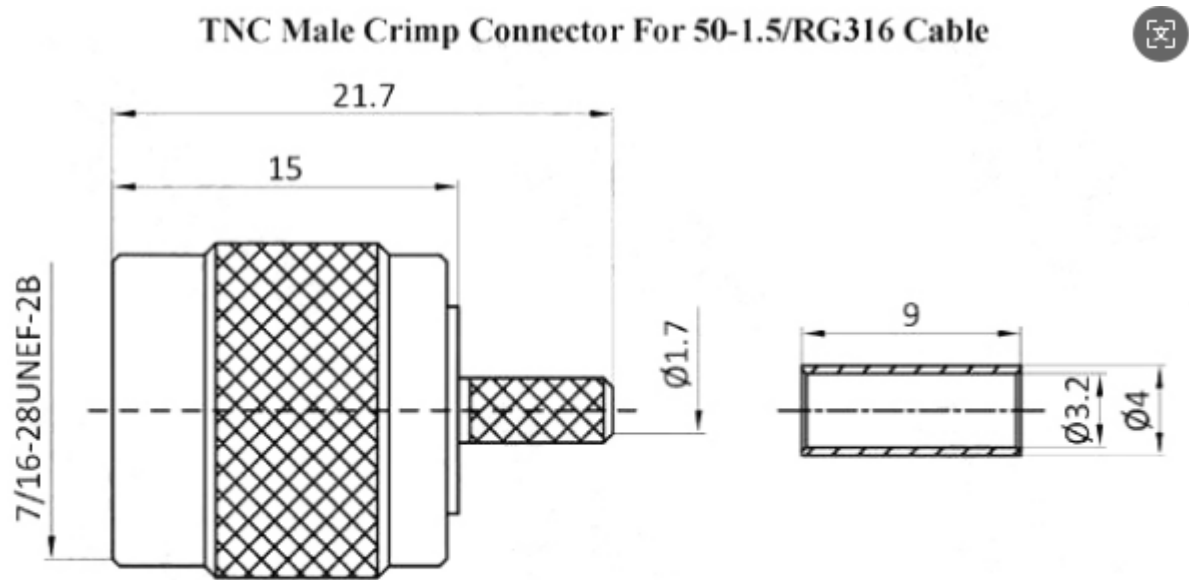

Interface 界面	IEC 60169-17	
According to 根据		
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-6GHz	
Dielectric Withstanding Voltage 介质耐压	≥1500V RMS,50hz,at sea level	
Working Voltage 工作电压	≤750V RMS,50Hz,at sea level	
Dielectric Resistance 介电常数	≥5000MΩ	
Contact Resistance 接触电阻	Center Contact 中心	≤1.5mΩ
	Outer Contact 外部	≤0.2mΩ
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-45°C ~ +125°C	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Ni 镍
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金
Connection sleeve 螺套	Brass 黄铜	Ni 镍