

TNC-C-K-3


1

TNC母

2

匹配RG58/SYV-50-3等线缆

TNC Female Bulkhead Crimp Connector For 50-3/LMR200 Cable

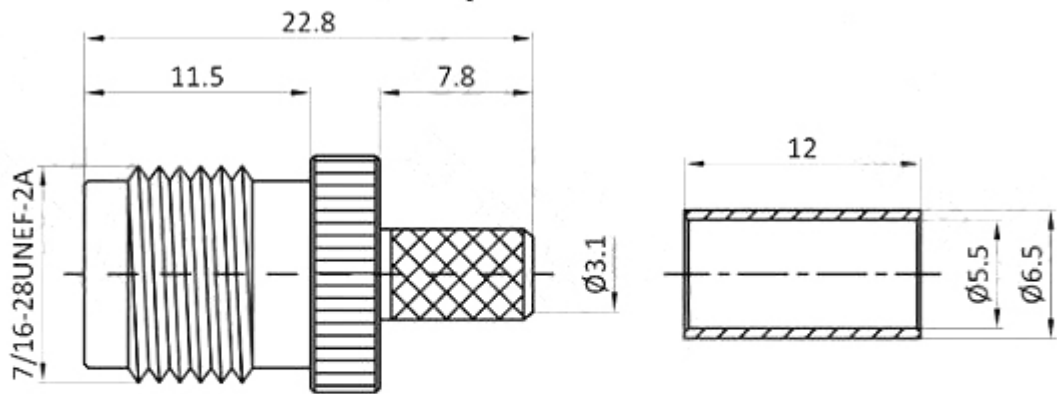

Interface 界面		
According to 根据	IEC 60169-17	
Electrical 电气		
Characteristic Impedance 特性阻抗	50 ohm	
Frequency Range 频率范围	DC-6GHz	
Dielectric Withstanding Voltage 介质耐压	≥1500V RMS,50hz,at sea level	
Dielectric Resistance 介电常数	≥5000MΩ	
Contact Resistance 接触电阻	Center Contact 中心	≤1.5mΩ
	Outer Contact 外部	≤1mΩ
Environmental 环境 & Mechanical 机械		
Temperature Range 温度范围	-45℃ ~ +125℃	
Durability 耐久性	≥500 cycles	
ROHS compliant 符合 ROHS	Full ROHS compliance	
Material and Plating 材料及涂镀		
Body 壳体	Material 材料	Plating 电镀
	Brass 黄铜	Ni 镍
	PTFE 聚四氟乙烯	—
Insulator 绝缘体		
Center conductor 中心导体	Brass 黄铜	Au 金