


TNC-C-KF-1.5 開窗 TNC 母帶法蘭壓接 50-1.5/RG316 線 TNC-KF3 連接器

TNC-C-KF-1.5 <窗口>

- 1 TNC母
- 2 匹配RG316/50-1.5等线缆
- 3 法兰盘中心距12.7 * 12.7mm



TNC Female Flange Crimp Connector For 50-1.5/RG316 Cable

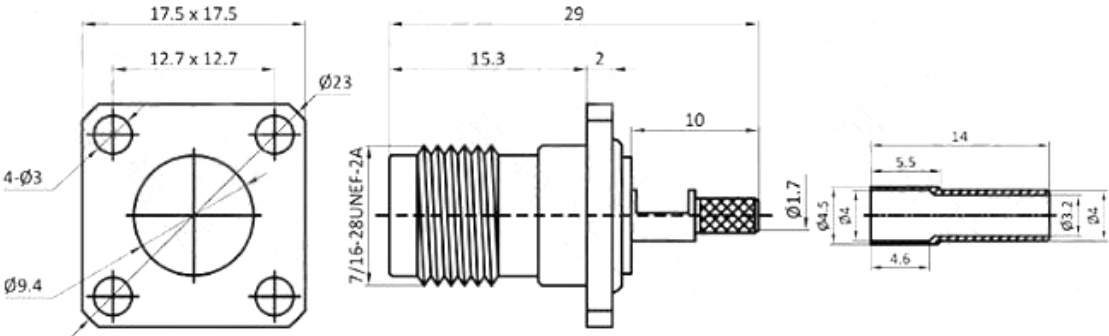

Interface 界面

According to 根据

IEC 60169-17

Electrical 电气

Characteristic Impedance 特性阻抗

50 ohm

Frequency Range 频率范围

DC-4GHz

VSWR 电压驻波比

≤1.2

Dielectric Withstanding Voltage 介质耐压

≥1500V RMS,50hz,at sea level

Dielectric Resistance 介电常数

≥5000MΩ

Contact Resistance 接触电阻

Center Contact 中心 ≤1.5mΩ

Outer Contact 外部 ≤1mΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围

-45°C ~ +125°C

Durability 耐久性

≥500 cycles

ROHS compliant 符合 ROHS

Full ROHS compliance

Material and Plating 材料及涂镀

Body 壳体

Material 材料

Plating 电镀

Brass 黄铜

Ni 镍

Insulator 绝缘体

PTFE 聚四氟乙烯

—

Center conductor 中心导体

Brass 黄铜

Au 金