



125W Quad Output Switching Power Supply

RQ-125 series



Features:


- Protections:Short circuit/Over load/Over voltage
- Cooling by free air convection
- LED indicator for power on
- 100% full load burn-in test
- All using 105^o long life electrolytic capacitors
- Withstand 300VAC surge input for 5 second
- High operating temperature up to 70°C
- · Withstand 5G vibration test
- High efficiency, long life and high reliability
- 3 years warranty

SPECIFICATION



MODEL		RQ-125B				RQ-125C			RQ-125D				
	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH1	CH2	СНЗ	CH4	CH1	CH2	CH3	CH4
	DC VOLTAGE	5V	12V	-5V	-12V	5V	15V	-5V	-15V	5V	12V	24V	-12V
	RATED CURRENT	11A	4.5A	1A	0.5A	10A	4A	1A	0.5A	8A	2.5A	2A	0.5A
	CURRENT RANGE Note.6	2 ~ 12A	0.5 ~ 4.5A	0.1 ~ 1A	0 ~ 1A	2 ~ 12A	0.5 ~ 4A	0.1 ~ 1A	0 ~ 1A	2 ~ 12A	0.5 ~ 4A	0.1 ~ 2.5A	0 ~ 1A
	RATED POWER Note.6	120W	Ohr.	1		122.5W	.10	COA	XXI	124W	-3777	11.	N.C
OUTPUT	RIPPLE & NOISE (max.) Note.2	80mVp-p	120mVp-p	80mVp-p	80mVp-p	80mVp-	120mVp-p	80mVp-p	80mVp-p	80mVp-p	120mVp-p	150mVp-p	80mVp-
	VOLTAGE ADJ. RANGE	CH1: 4.75 ~ 5.5V			CH1: 4.75 ~ 5.5V			CH1: 4.7			OUX.		
	VOLTAGE TOLERANCE Note.3	±2.0%	+8,-3%	+6,-10%	±5.0%	±2.0%	+8,-3%	+6,-10%	±5.0%	±2.0%	+8,-3%	±8.0%	±5.0%
	LINE REGULATION Note.4	±0.5%	±1.0%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±1.0%	±0.5%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION Note.5	±1.0%	±3.0%	±6.0%	±2.0%	±1.0%	±3.0%	±6.0%	±2.0%	±1.0%	±3.0%	±5.0%	±2.0%
	SETUP, RISE, HOLD TIME	500ms, 2	0ms, 20ms/	230VAC	1200m	s, 30ms, 1	0ms/115VA	C at full loa	d ON	-1			1.10
	VOLTAGE RANGE	88 ~ 132VAC / 176 ~ 264VAC selected by switch 248 ~ 373VDC(Withstand 300VAC surge for 5sec. Without damage)											
	FREQUENCY RANGE	47 ~ 63Hz									1		
	EFFICIENCY(Typ.)	79%	00 >	.Mo.		80%	-11	1700	<u>~0</u>	82%			TIV.
INPUT	AC CURRENT	3A/115V	AC 2A	/230VAC	TW		MA	- 100	N.C.	TIL	N	M	1
	INRUSH CURRENT(max.)		TART 50A/2		_ <1		-100	11.11	~<7 C)//10-	-XXI	- 1	WW
	LEAKAGE CURRENT	<2mA/240VAC											
		110 ~ 150% rated output power											
PROTECTION	OVERIOAD							condition is	s removed	COM	-31		
		Protection type: Hiccup mode, recovers automatically after fault condition is removed CH1: 5.75 ~ 6.75V											
	OVER VOLTAGE Protection type: Hiccup mode, recovers automatically after fault condition is removed									W			
ENVIRONMENT	WORKING TEMP.	-25 ~ +70°C (Refer to output load derating curve)											
	WORKING HUMIDITY	20 ~ 90% RH non-condensing											
	STORAGE TEMP., HUMIDITY	-40 ~ +85 °C, 10 ~ 95% RH											
	TEMP. COEFFICIENT	±0.03%/°C (0~50°C)on+5V output											
	VIBRATION	10 ~ 500Hz, 5G 10min./1cycle, period for 60min. each along X, Y, Z axes											
	SAFETY STANDARDS	UL60950-1, TUV EN60950-1 Approved											
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC I/P-FG:1.5KVAC O/P-FG:0.5KVAC											
SAFETY & ISOLATION RESISTANCE I/P-O/P, I/P-FG, O/P-FG; 100M Ohms/500VDC					N W	. 00	V.CO	TW.					
EMC	EMI CONDUCTION & RADIATION								-111	N. III	<1 C.O	Maria	×I
(Note 7)	HARMONIC CURRENT	Compliance to EN55022 (CISPR22) Class B Compliance to EN61000-3-2,-3											
	EMS IMMUNITY				• **	ENIV5020	4, EN61000-	6.2 (EN50	082 2) hoay	v industry	lovel criter	ia A	
	MTBF	203.1Kh			217F (25°C)		+, LING 1000-	-0-2 (LINOU	002-2) IIEav	ry industry	level, criter	ia A	
OTHERS	DIMENSION		88mm (L*W*		2177 (23 ()	Y.							
	PACKING		pcs/14Kg/0		11.10	ast C	OM.						
NOTE	All parameters NOT special Ripple & noise are measure Tolerance: includes set up Line regulation is measure Load regulation is measure Each output can work within The power supply is consid	ally mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. red at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. to tolerance, line regulation and load regulation. of from low line to high line at rated load. ed from 20% to 100% rated load, and other output at 60% rated load. ein current range. But total output power can't exceed rated output power. dered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets easured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time.											



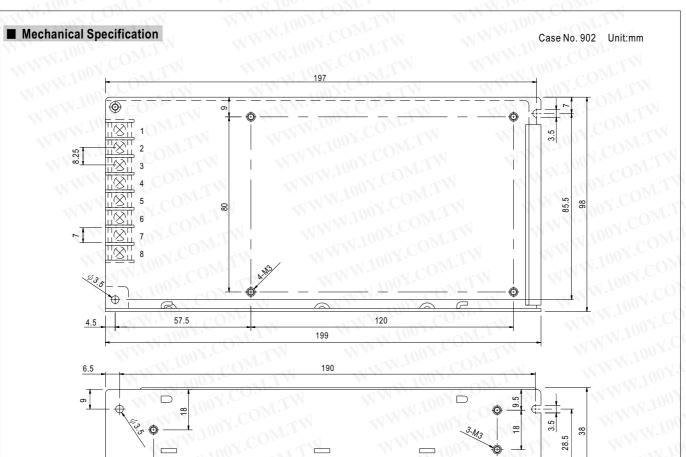

Terminal Pin. No Assignment

22

Pin No.	Assignment	Pin No.	Assignment	Pin No.	Assignment			
1	AC/L	4	DC OUTPUT -V4	7	DC OUTPUT COM			
2	AC/N	5	DC OUTPUT V3	8	DC OUTPUT +V1			
3	FG ≟	6	DC OUTPUT +V2	~ ~ (Mir			

勝 特 力 材 料 886-3-5753170 胜特力电子(上海) 86-21-54151736 胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw

