


TNC-C-KY-1.5 TNC 母螺母穿牆壓接 50-1.5/RG316 線 17 六角連接器 KY3

TNC-C-KY-1.5

- ① TNC母
- ② 匹配RG316/50-1.5等线缆



TNC Female Bulkhead Crimp Connector For 50-1.5/RG316 Cable

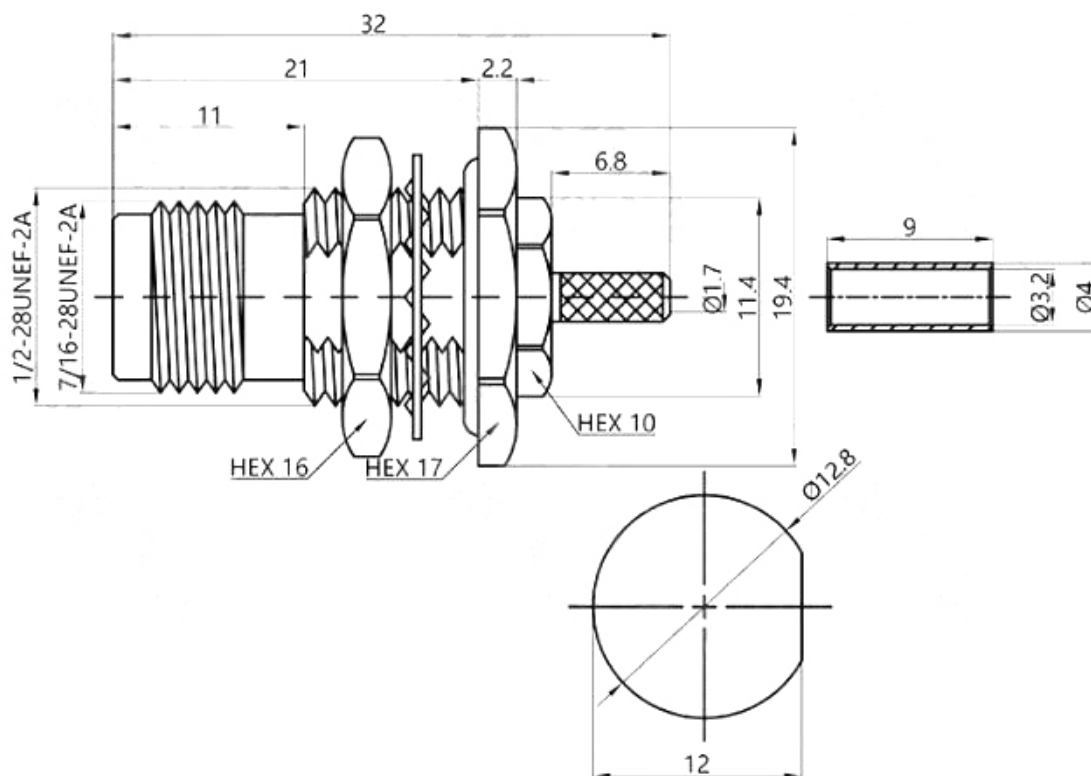

Interface 界面**According to 根据****IEC 60169-17****Electrical 电气****Characteristic Impedance 特性阻抗****50 ohm****Frequency Range 频率范围****DC-4GHz****Dielectric Withstanding Voltage 介质耐压** **$\geq 1500\text{V RMS}, 50\text{Hz}, \text{at sea level}$** **Working Voltage 工作电压** **$\leq 750\text{V RMS}, 50\text{Hz}, \text{at sea level}$** **Dielectric Resistance 介电常数** **$\geq 5000\text{M}\Omega$** **Contact Resistance 接触电阻****Center Contact 中心 $\leq 1.5\text{m}\Omega$** **Outer Contact 外部 $\leq 1\text{m}\Omega$** **Environmental 环境 & Mechanical 机械****Temperature Range 温度范围** **$-45^{\circ}\text{C} \sim +125^{\circ}\text{C}$** **Durability 耐久性** **$\geq 500$ cycles****ROHS compliant 符合 ROHS****Full ROHS compliance****Material and Plating 材料及涂镀****Material 材料****Plating 电镀****Body 壳体****Brass 黄铜****Ni 镍****Insulator 绝缘体****PTFE 聚四氟乙烯****—****Center conductor 中心导体****Brass 黄铜****Au 金**