


Use RS232 over very long distances - safely and reliably.



Application:
Serial connection over up to 1000 m.



RS232 booster

RS232 booster, Industry, #88205

Isolation: min. 1 kV

Baud rate: 0..115,200 baud

Data format: any format

Max. distance: 50 m

Signals: supports all RS232 signals

Power supply: Supplied power adapter
or 12..24 V DC/AC

Input: 25-pole SUB-D socket, DCE assignment

Output: 25-pin SUB-D adapter, DTE assignment

Ambient temperature: Storage: -40..+70°C

Operation: 0..+60°C at external 24V supply voltage

Housing: Plastic compact housing, 105x75x22mm

Weight: approx. 750 g incl. power adapter

Delivery: 1x RS232 booster, Industry

1x power adapter for application in office

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

INTERFACE CONVERTER INSTRUCTION MANUAL

RS-232 LINE BOOSTER 9C

RS-232C Line Booster can be double your length of RS-232 cable.

ELECTRONIC SPECIFICATIONS:

Power adaptor input : AC 120V 60HZ (OR 230V 60HZ/50HZ)
output: DC +9V 200mA.

Line Supports Pins: 2-6, 8, 20 pin 1,7 is wired directly
from the male connector to the female.


Connectors: DB25 female is DTE mode
DB25 male is DCE mode

LED: Power on

Size: 75 mm(L)* 43 mm(W)* 20 mm(H) weight: 260g
*For 9C Booster only

■ NON-POWER Series without power adaptor.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

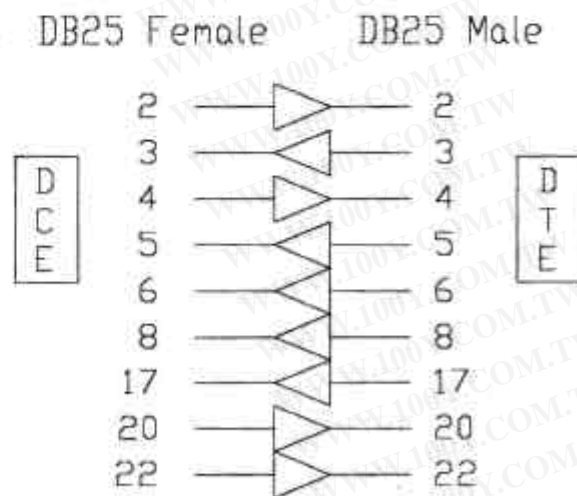

P/N-E-11A 9C