


TRB/BNT 1W Load TNG1-4-50

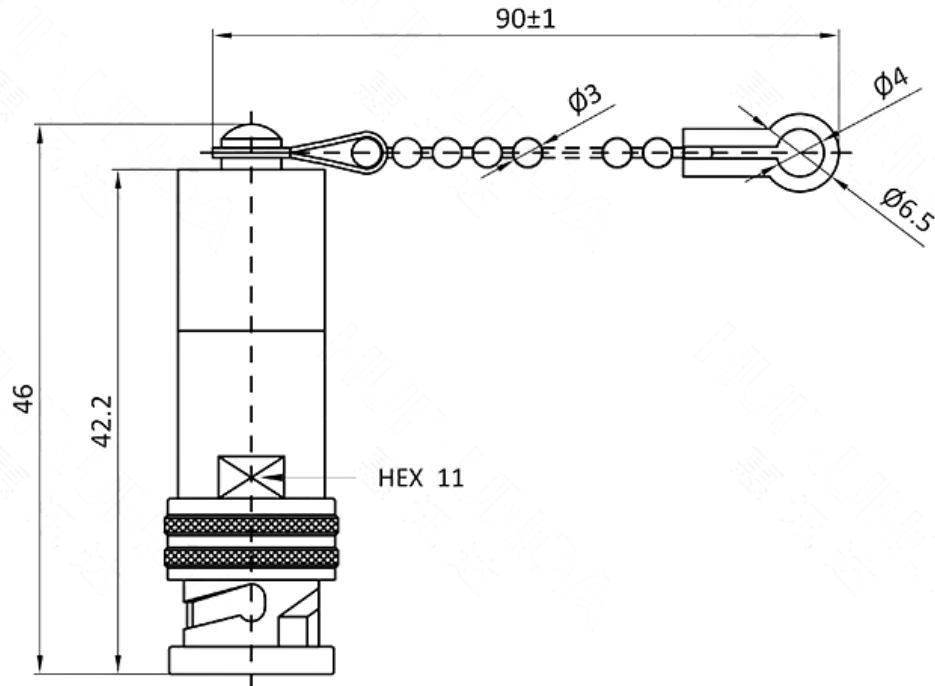

**Interface 界面**

**According to 根据**

**Electrical 电气**

**Characteristic Impedance 特性阻抗**

50 ohm

**Frequency Range 频率范围**

DC-500MHz

**Power capacity(W) 功率**

1W

**Connection mode 接口**

TRB (M)

**Environmental 环境 & Mechanical 机械**

**Temperature Range 温度范围**

-40°C ~ +85°C

**Durability 耐久性**

≥500 cycles

**ROHS compliant 符合 ROHS**

Full ROHS compliance

**Material and Plating 材料及涂镀**

**Body 壳体**

**Material 材料**

Brass 黄铜

**Plating 电镀**

Ni 镍

**Insulator 绝缘体**

PTFE 聚四氟乙烯

—

**Center conductor 中心导体**

Brass 黄铜

Au 金

**Connection sleeve 螺套**

Brass 黄铜

Ni 镍