


TRB BNT Male to BNC Male Adapter

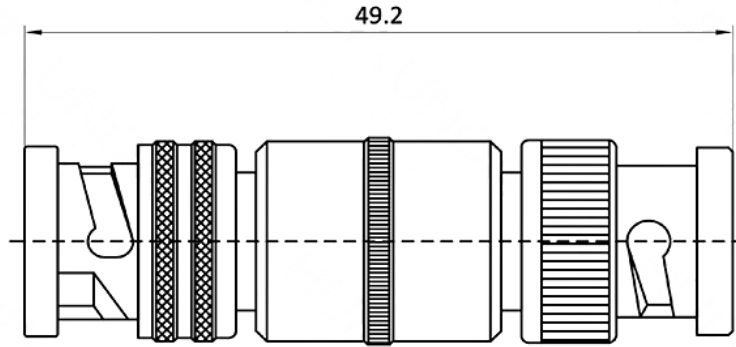

Electrical 电气

Characteristic Impedance 特性阻抗	50 ohm
Frequency Range 频率范围	DC-500MHz
Dielectric Withstanding Voltage 介质耐压	≥1500V RMS,50hz,at sea level
Dielectric Resistance 介电常数	≥5000MΩ
Center Contact 中心	≤1.5mΩ
Outer Contact 外部	≤1mΩ

Environmental 环境 & Mechanical 机械

Temperature Range 温度范围	-45°C ~ +125°C
Durability 耐久性	≥500 cycles
ROHS compliant 符合 ROHS	Full ROHS compliance

Material and Plating 材料及涂镀

	Material 材料	Plating 电镀
Body 壳体	Brass 黄铜	Ni 镍
Insulator 绝缘体	PTFE 聚四氟乙烯	—
Center conductor 中心导体	Brass 黄铜	Au 金

