

SHINDENGEN


Darlington Transistor

2SD1795
(TP10K40)

10A NPN

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OUTLINE DIMENSIONS

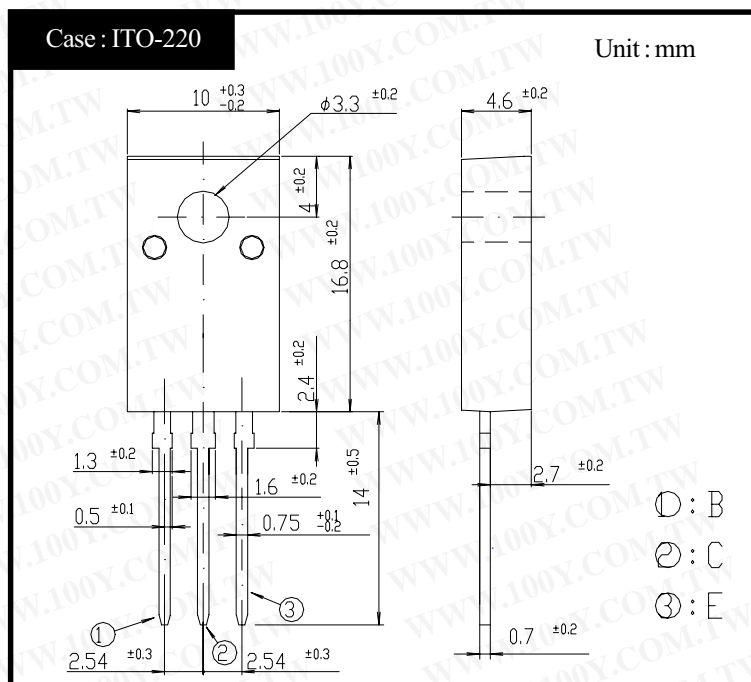

RATINGS


● Absolute Maximum Ratings

Item	Symbol	Conditions	Ratings	Unit
Storage Temperature	T_{stg}		-55~+150	°C
Junction Temperature	T_j		+150	°C
Collector to Base Voltage	V_{CBO}		500	V
Collector to Emitter Voltage	V_{CEO}		400	V
Emitter to Base Voltage	V_{EBO}		12	V
Collector Current DC	I_C		10	A
Collector Current Peak	I_{CP}		15	A
Base Current DC	I_B		0.5	A
Base Current Peak	I_{BP}		1.0	A
Total Transistor Dissipation	P_T	$T_c = 25^\circ\text{C}$	50	W
Dielectric Strength	V_{dis}	Terminals to case AC 1 minute	2	kV
Mounting Torque	TOR	(Recommended torque : 0.3N·m)	0.5	N·m

● Electrical Characteristics ($T_c=25^\circ\text{C}$)


Item	Symbol	Conditions	Ratings	Unit
Collector to Emitter Sustaining Voltage	V_{CEO}	V_{CE} (Clamp)	Min 400	V
Collector Cutoff Current	I_{CBO}	$V_{CB} = 500\text{V}$	Max 0.1	mA
	I_{CEO}	$V_{CE} = 400\text{V}$	Max 0.1	
Emitter Cutoff Current	I_{EBO}	$V_{EB} = 12\text{V}$	Max 100	mA
DC Current Gain	h_{FE}	$V_{CE} = 2\text{V}, I_C = 7\text{A}$	Min 150	
Collector to Emitter Saturation Voltage	$V_{CE}(\text{sat})$	$I_C = 7\text{A}$	Max 1.5	V
Base to Emitter Saturation Voltage	$V_{BE}(\text{sat})$	$I_B = 70\text{mA}$	Max 2.0	V
Thermal Resistance	θ_{jc}	Junction to case	Max 2.5	°C/W
Transition Frequency	f_T	$V_{CE} = 10\text{V}, I_C = 1\text{A}$	TYP 10	MHz
Turn on Time	t_{on}		Max 2	μs
Storage Time	t_s	$I_C = 7\text{A}$ $I_{B1} = I_{B2} = 70\text{mA}$ $R_L = 10\ \Omega$	Max 15	
Fall Time	t_f	$V_{BB2} = 4\text{V}$	Max 15	

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

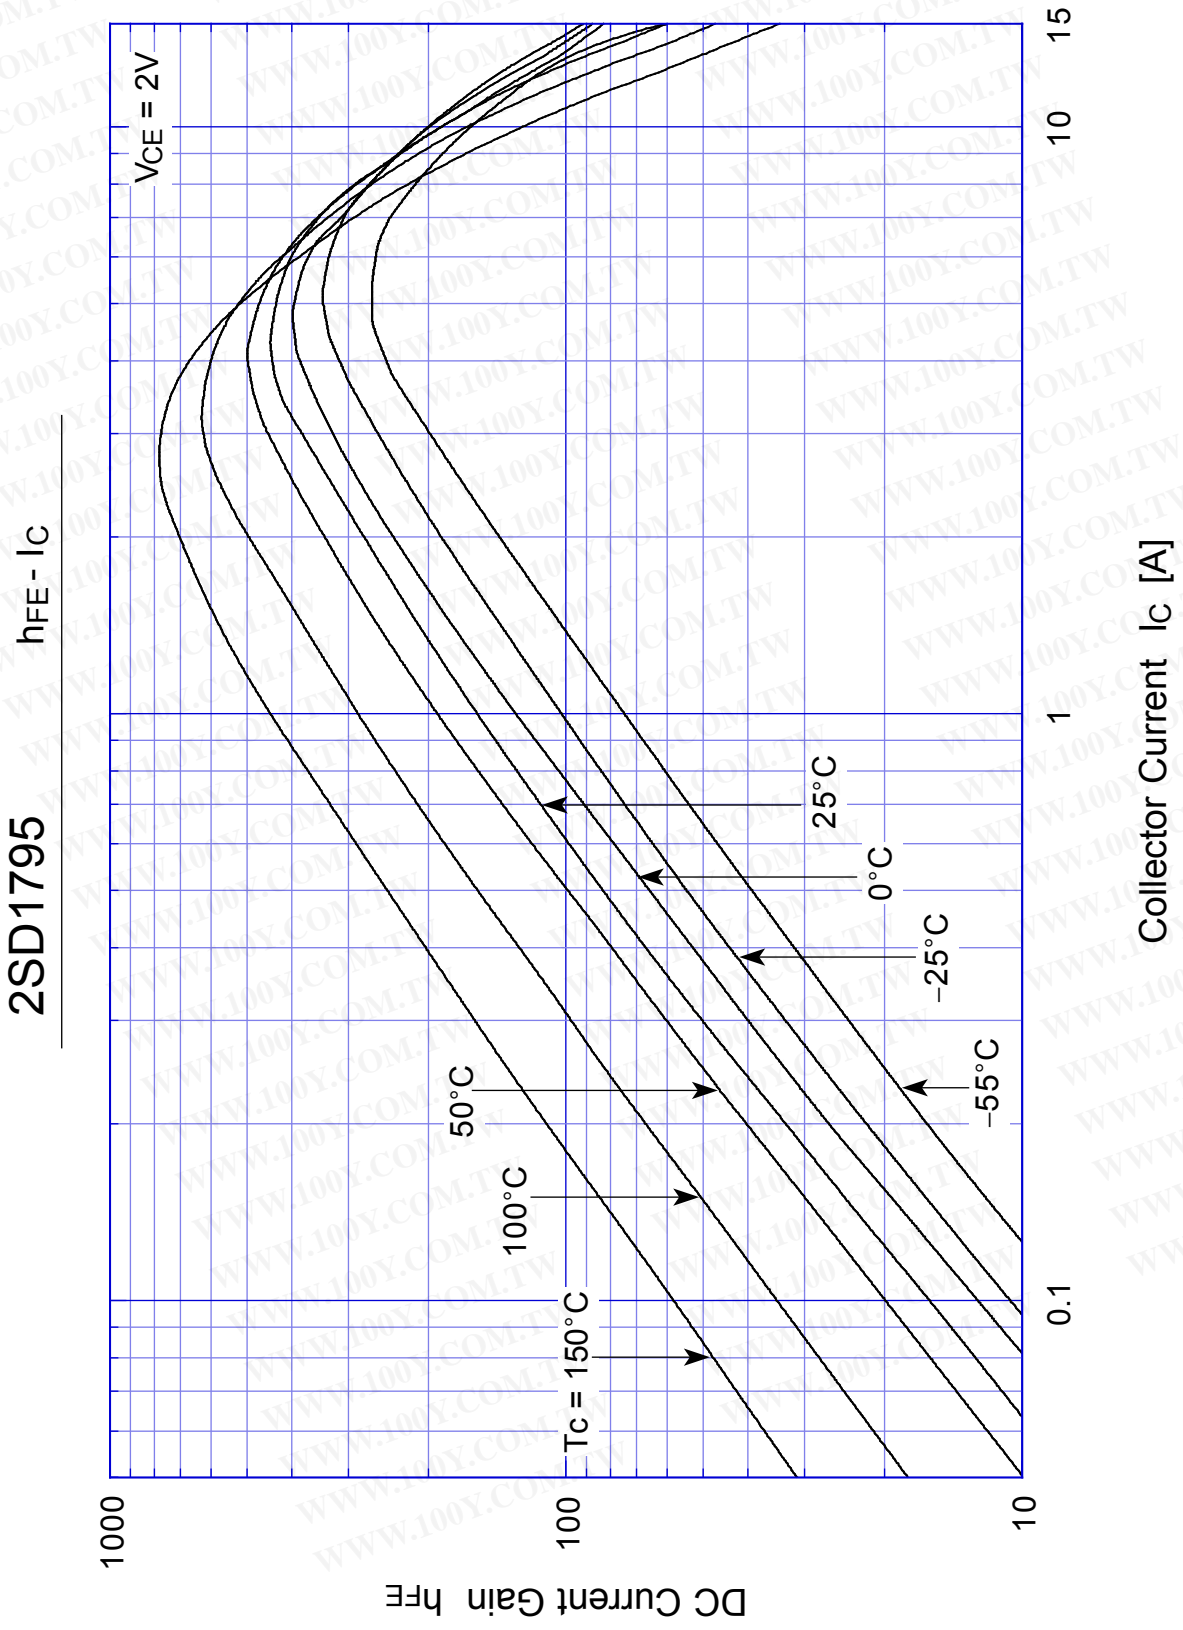


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2SD1795 Saturation Voltage

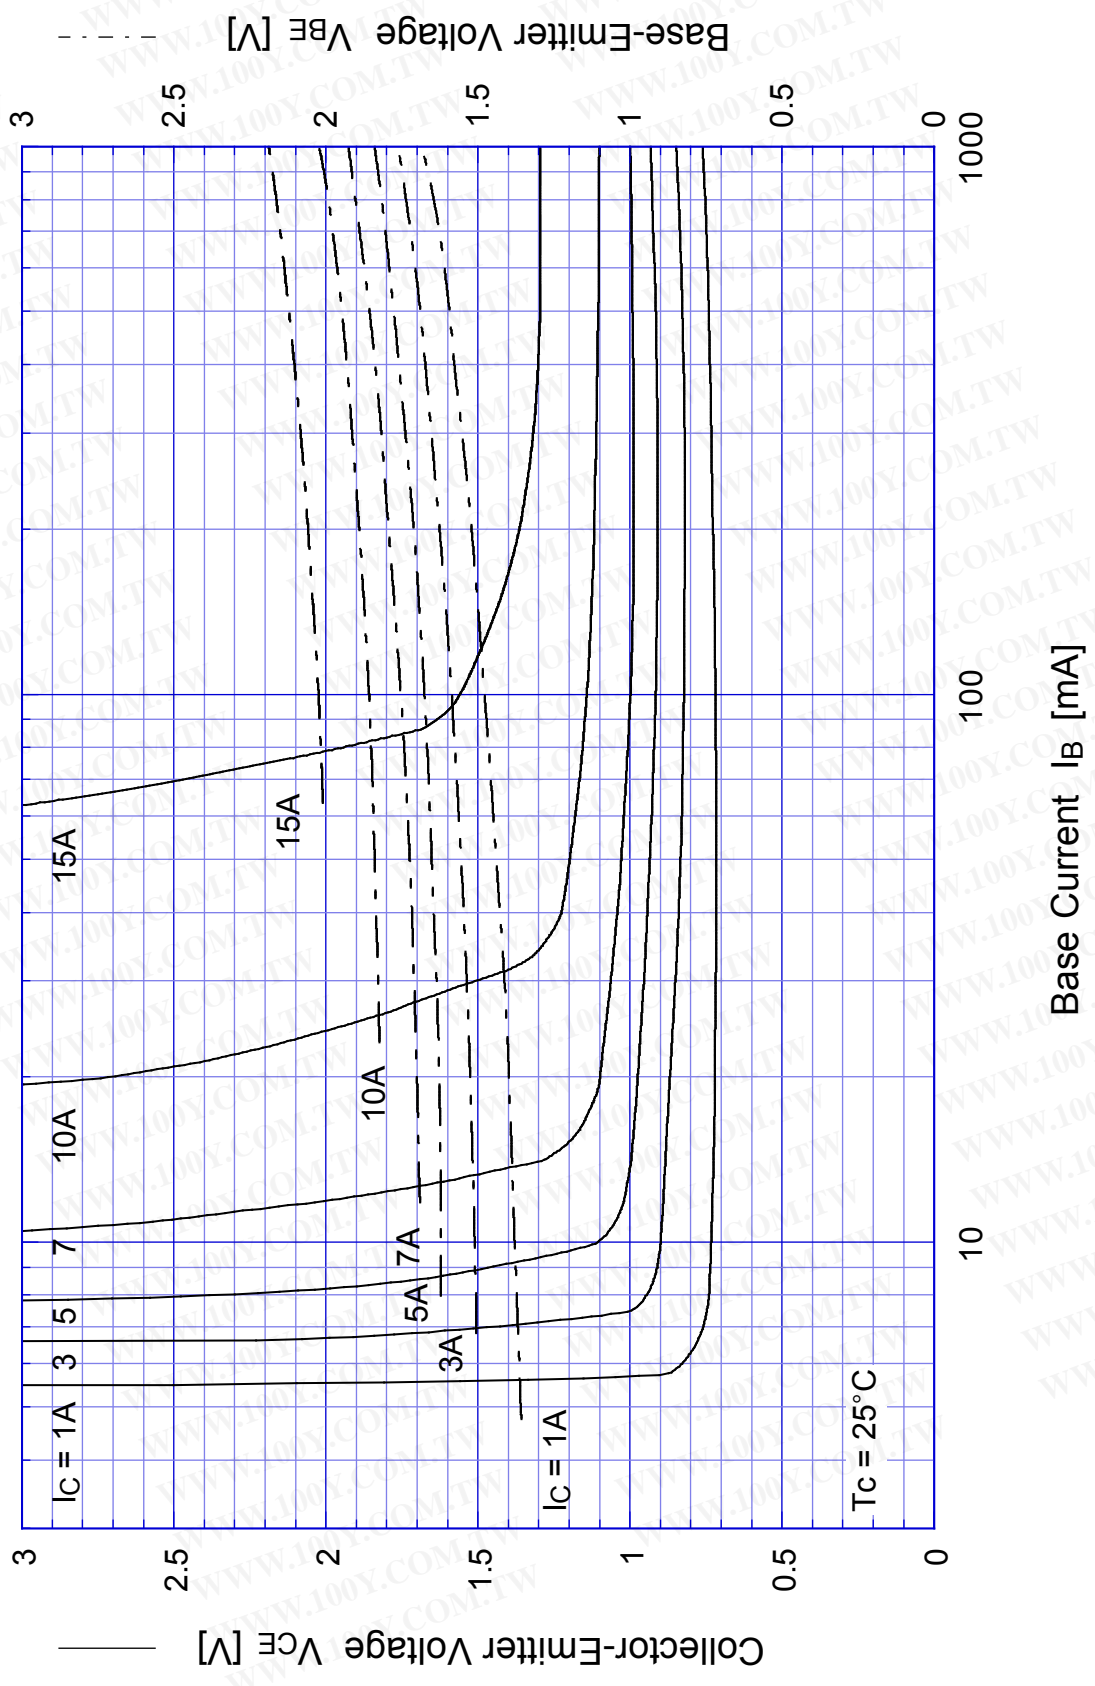

2SD1795


Switching Time - I_C

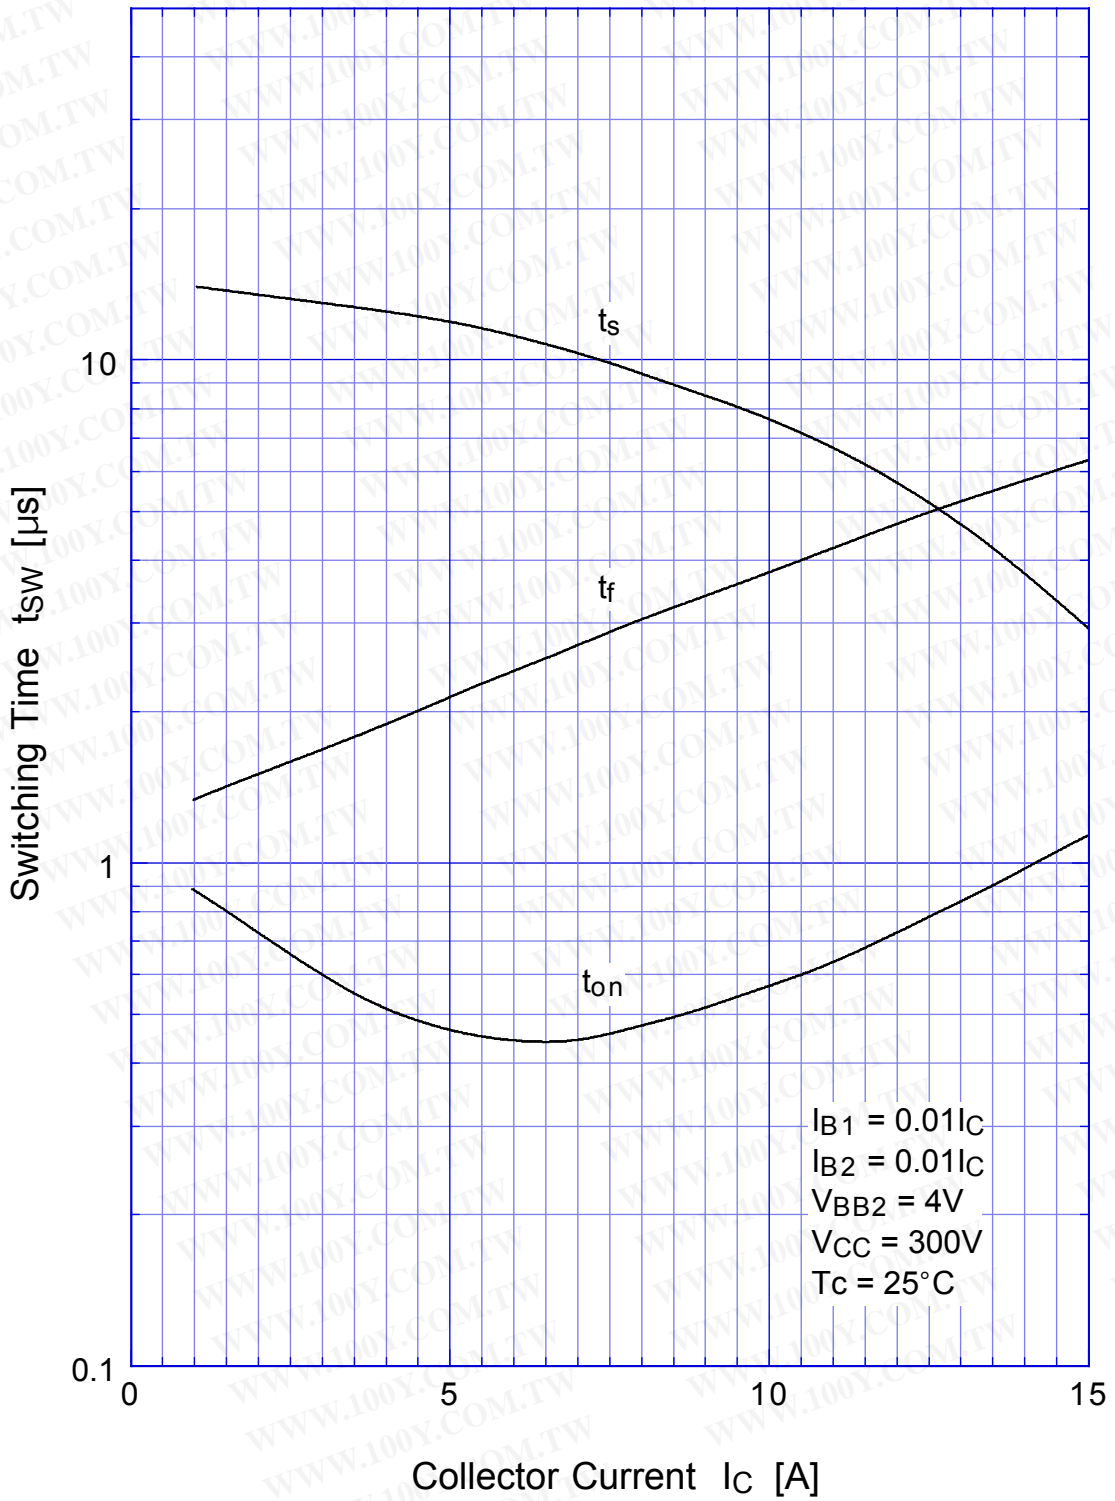


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2SD1795

Switching Time - Tc

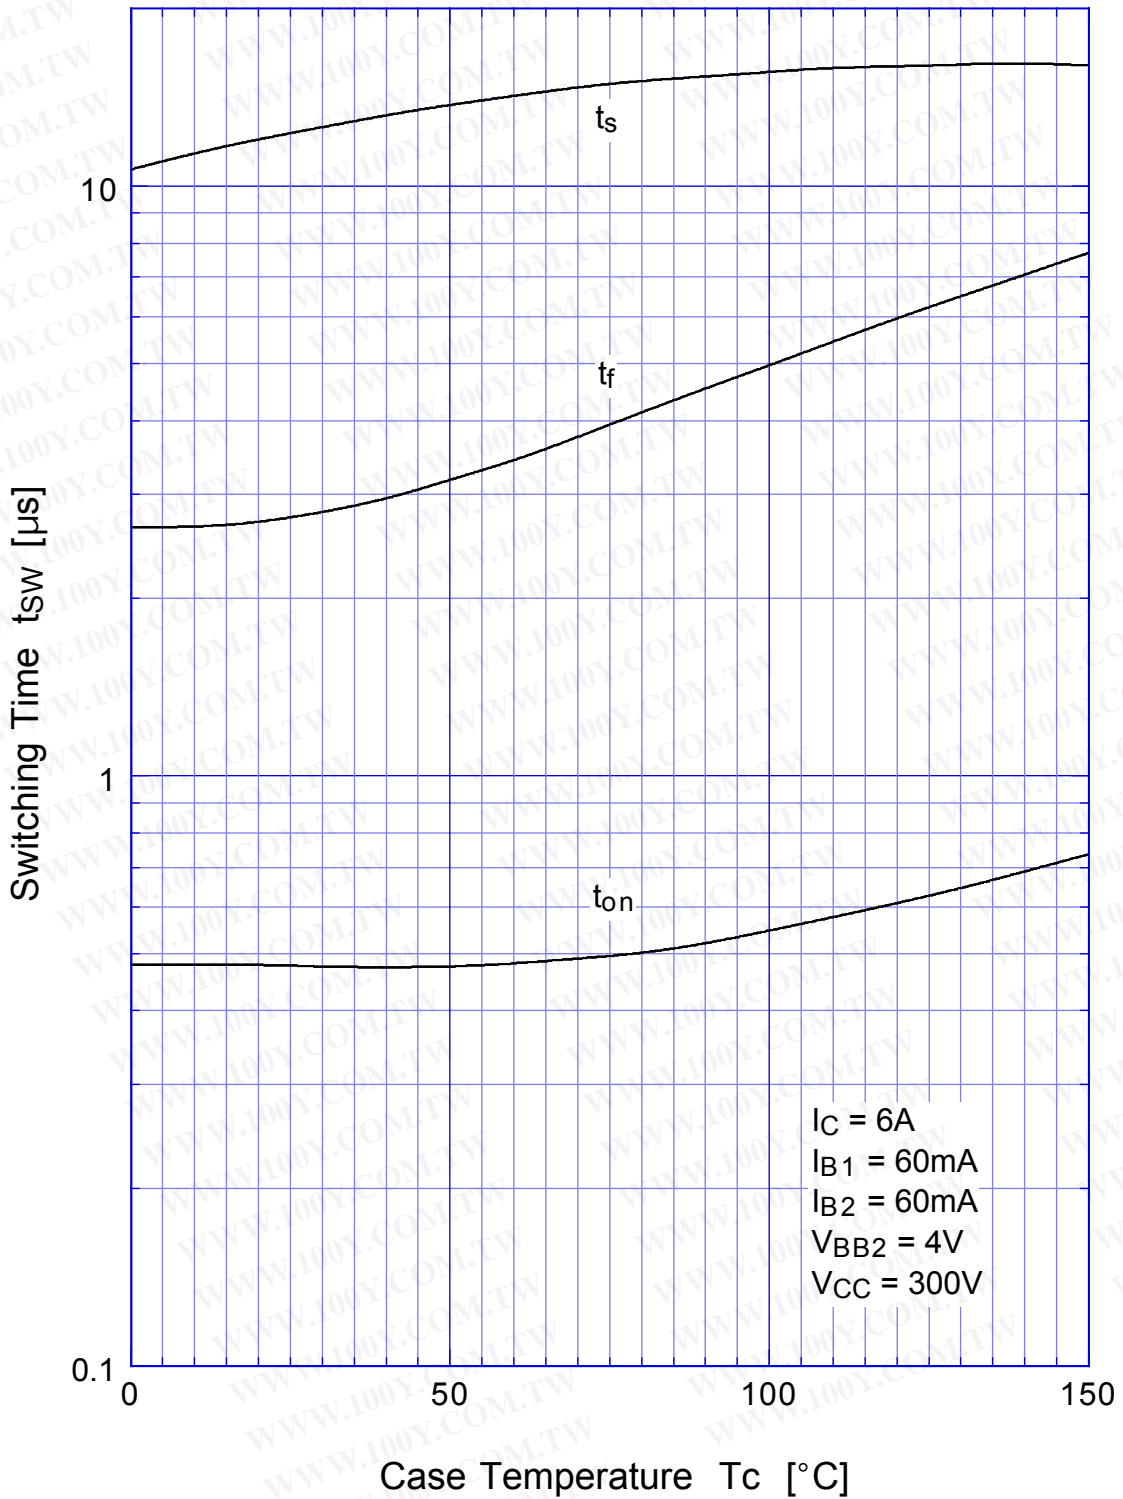


勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

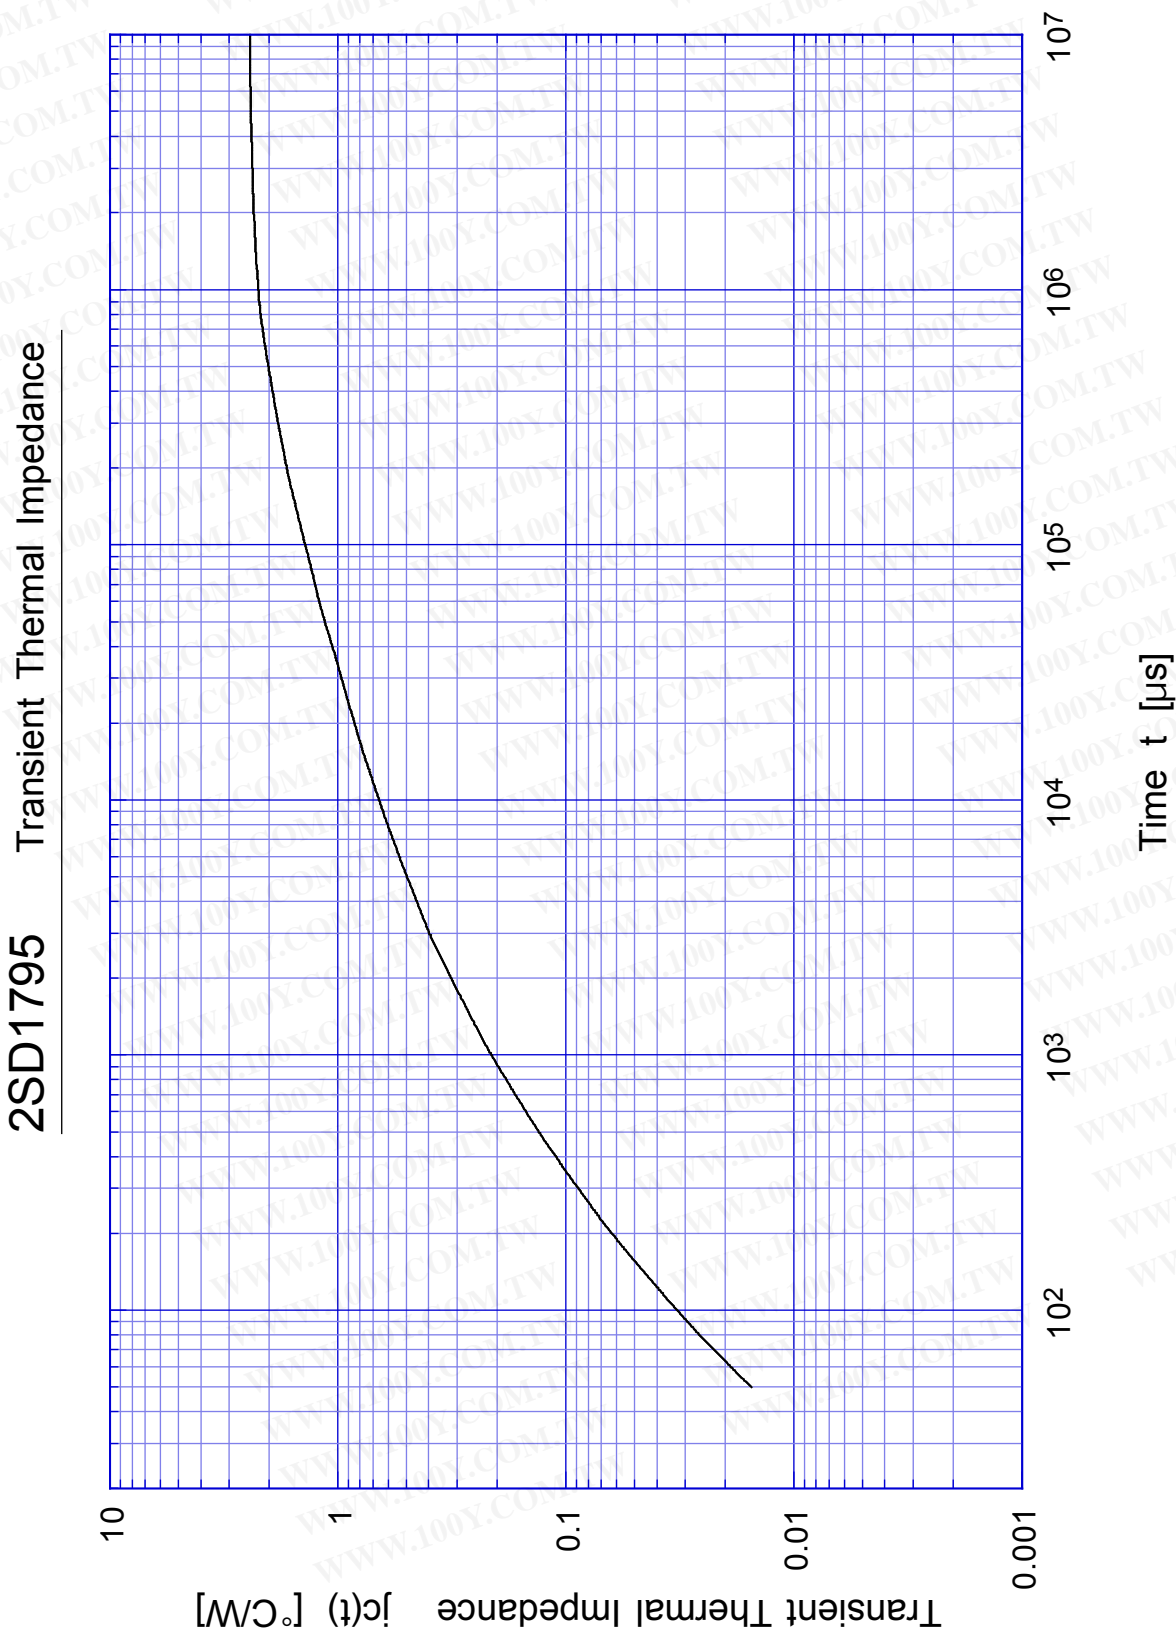

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


2SD1795

Forward Bias SOA

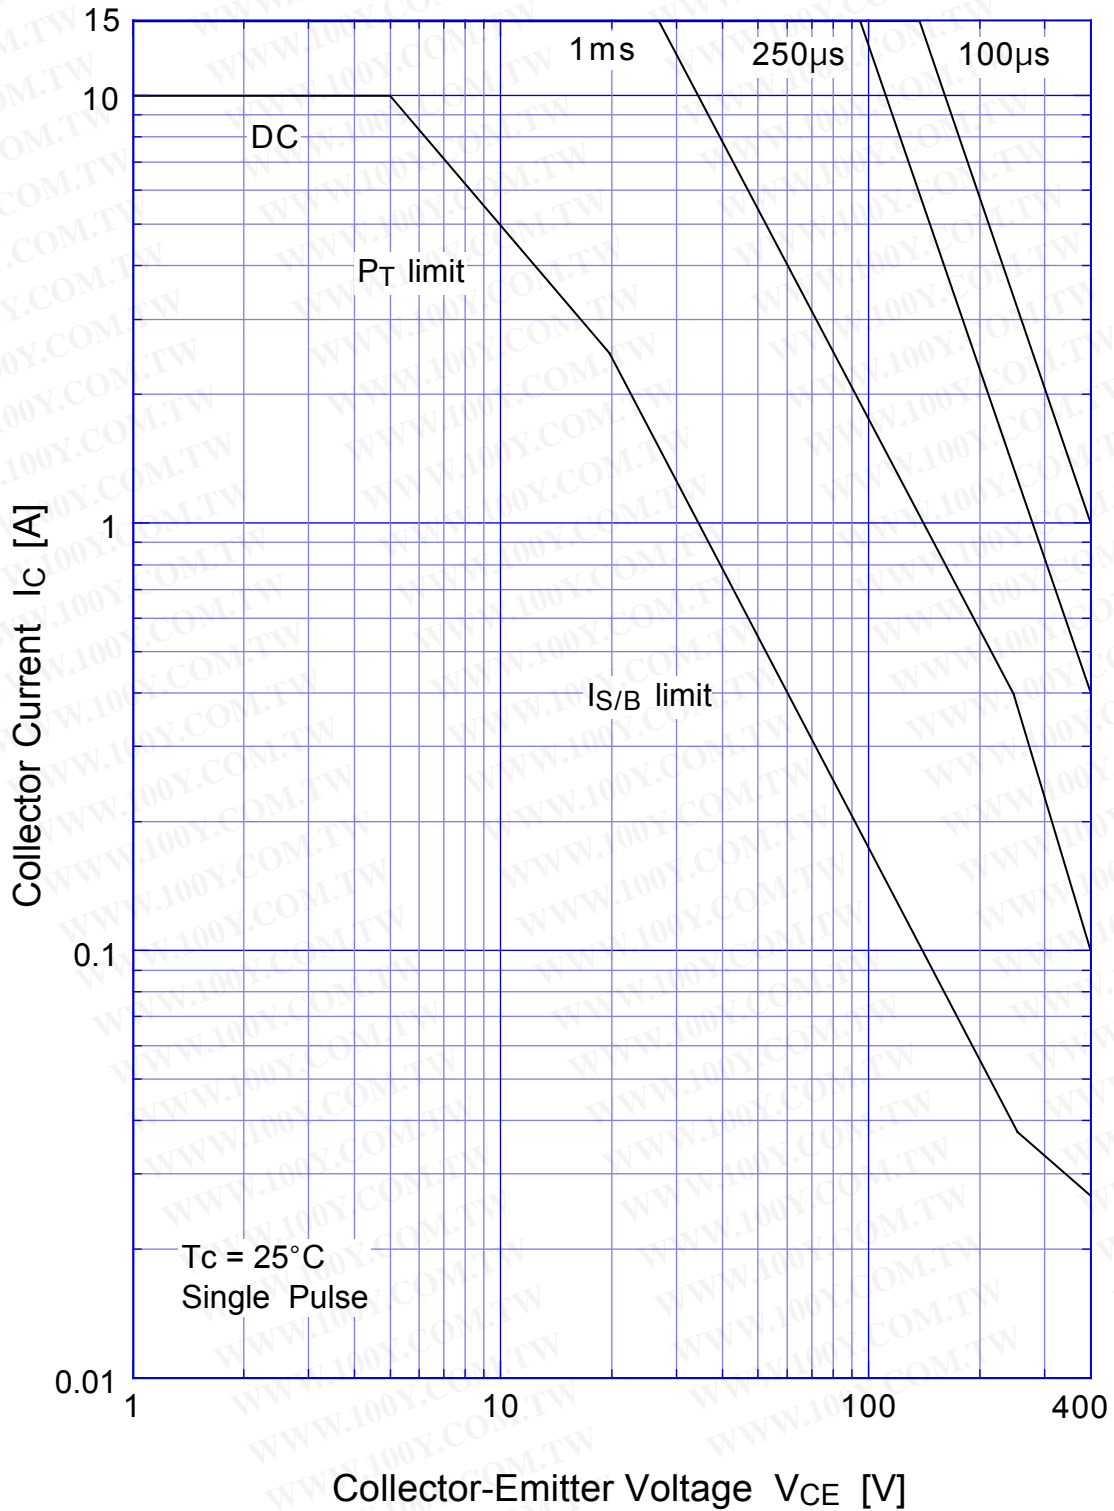

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)


2SD1795 Collector Current Derating

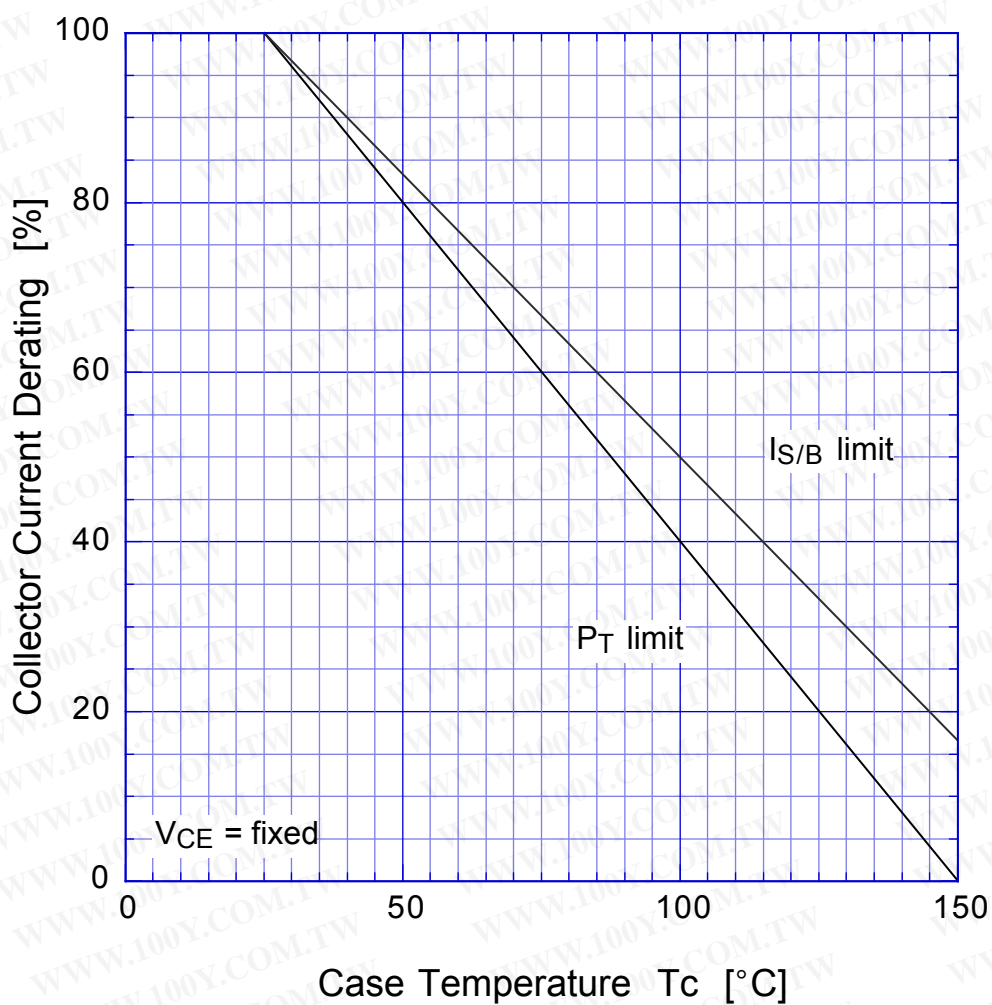

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

2SD1795

Reverse Bias SOA

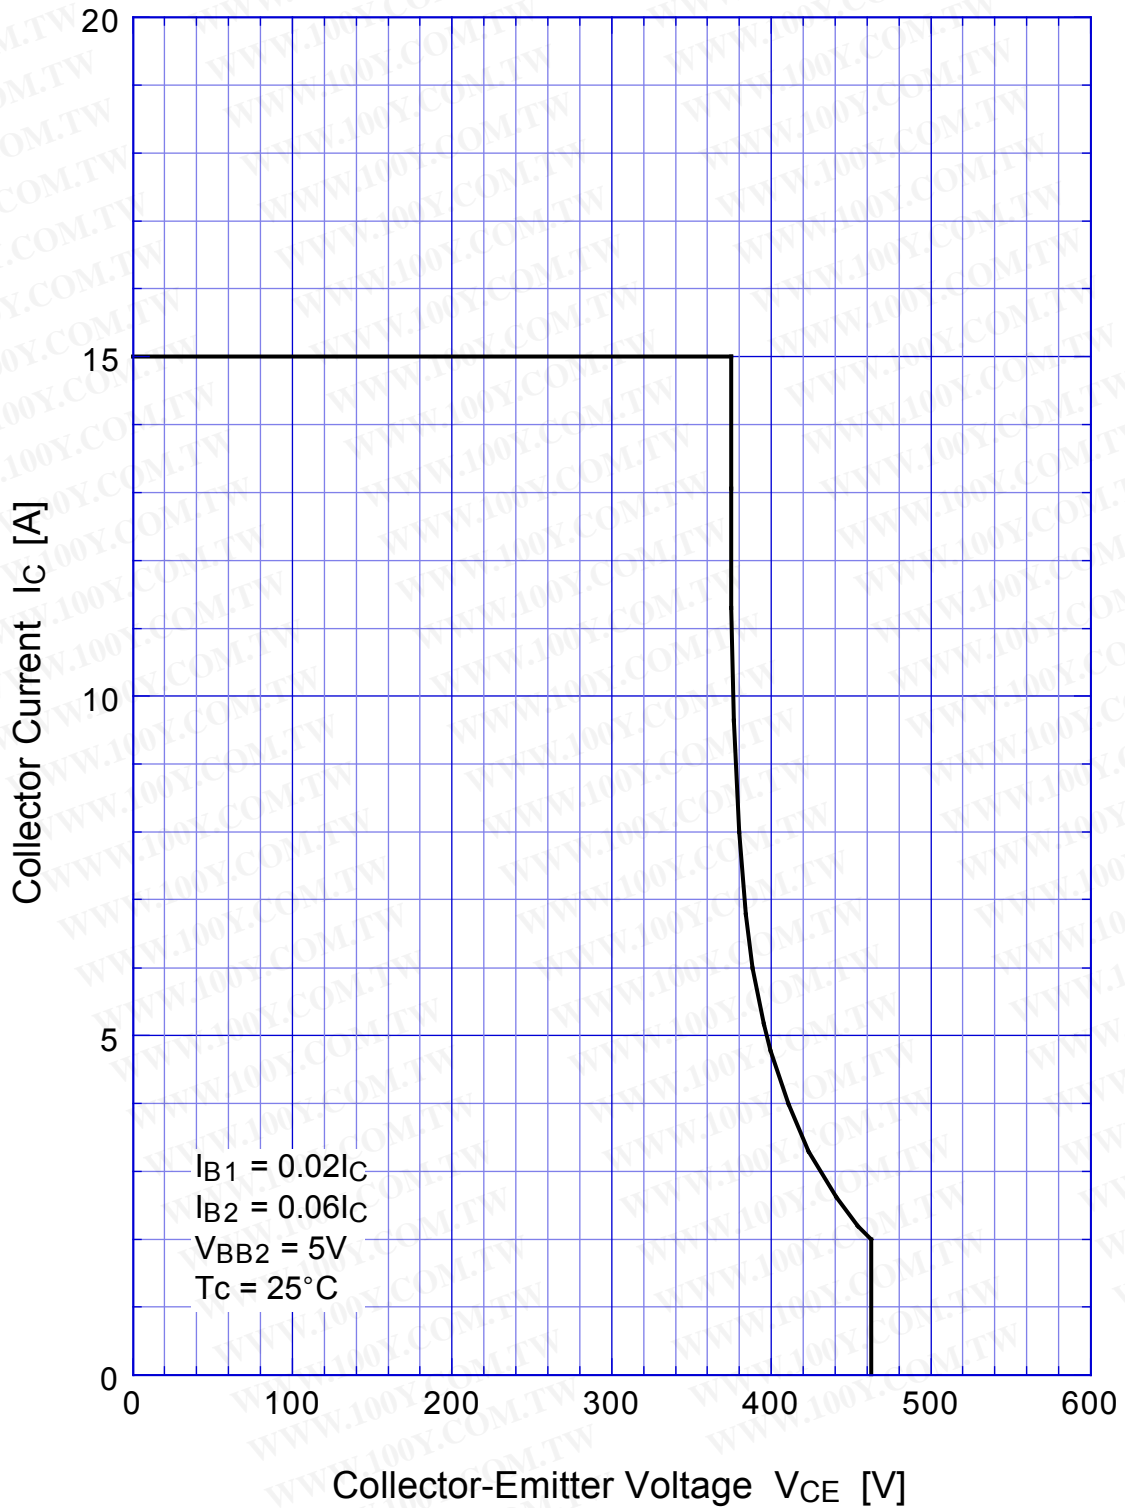

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)