




勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

■ 技术参数 SPECIFICATIONS

- ◆ 适用线规: AWG#28~#22
Applicable Wire: AWG#28~#22
- ◆ 额定电压: 250V DC,AC(rms)
Rated voltage: 250V DC,AC(rms)
- ◆ 额定电流: 3A (AWG #22)
Rated Current: 3A (AWG #22)
- ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/min.
- ◆ 工作温度: -25°C ~ +85°C
Working Temp : -25°C ~ +85°C
- ◆ 绝缘电阻: ≥1000 MΩ
Insulation resistance: ≥1000 MΩ
- ◆ 接触电阻: ≤20mΩ
Contact resistance: ≤20mΩ

■ 材料 MATERIAL

- ◆ 绝缘体: 尼龙66, UL94-V0
Insulator: Nylon66, UL94-V0
- ◆ 插针: 黄铜 PIN: Brass

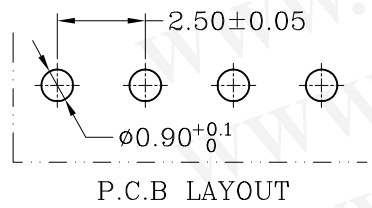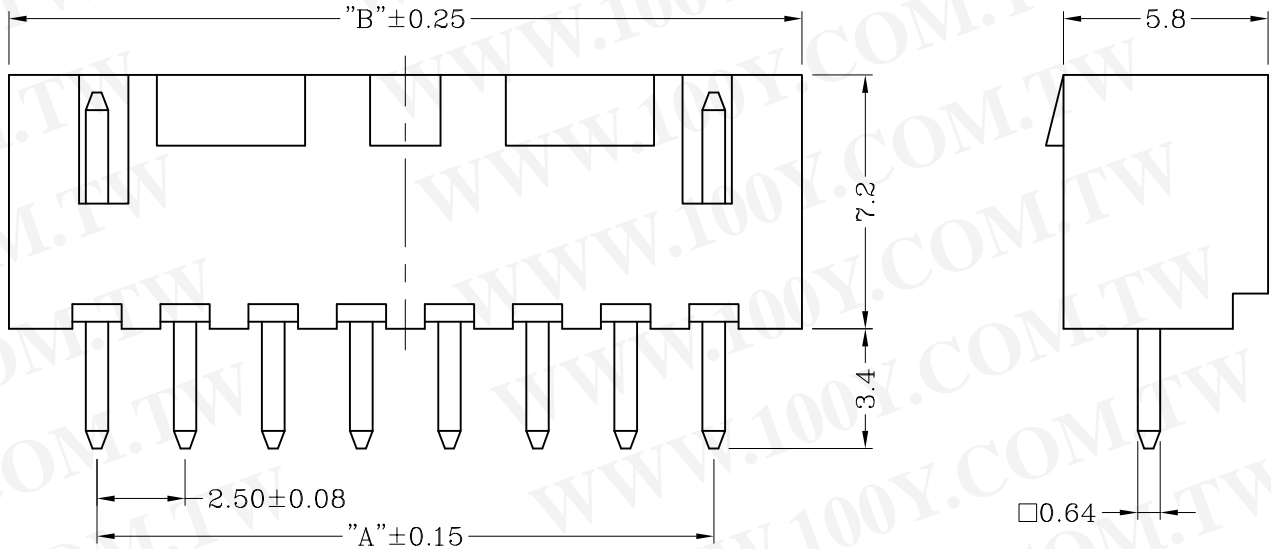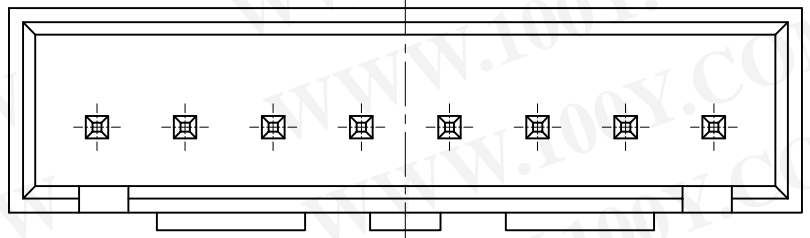

	2A	3A	4A	5A	6A	7A	8A	9A	10A	11A	12A	13A	14A	15A	16A
DIM.A	2.50	5.00	7.50	10.00	12.50	15.00	17.50	20.00	22.50	25.00	27.50	30.00	32.50	35.00	37.50
DIM.B	7.5	10.0	12.5	15.0	17.5	20.0	22.5	25.0	27.5	30.0	32.5	35.0	37.5	40.0	42.5

GENERAL TOLERANCE XX. ±0.40 X. ±0.30 .X ±0.25 .XX ±0.15	SCALE: 5:1	DRAWN:	DATE: 2010.10.16	DWG. NO. :	TITLE: 成品图	REV. A
	UNIT: mm	CHECK:	DATE: 2010.10.16	E:\DWG\Production\XHS		
	SIZE: A4	APPROVE:	DATE: 2010.10.16	PARTS NO. :	XHS-NA	SHEET: 1/1