


1015-14-黑色+加工

1015 #14-黑色+加工 前後上錫剝皮各 5mm/中段連接處上熱縮管處理/不用接香蕉頭或鱷魚夾

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

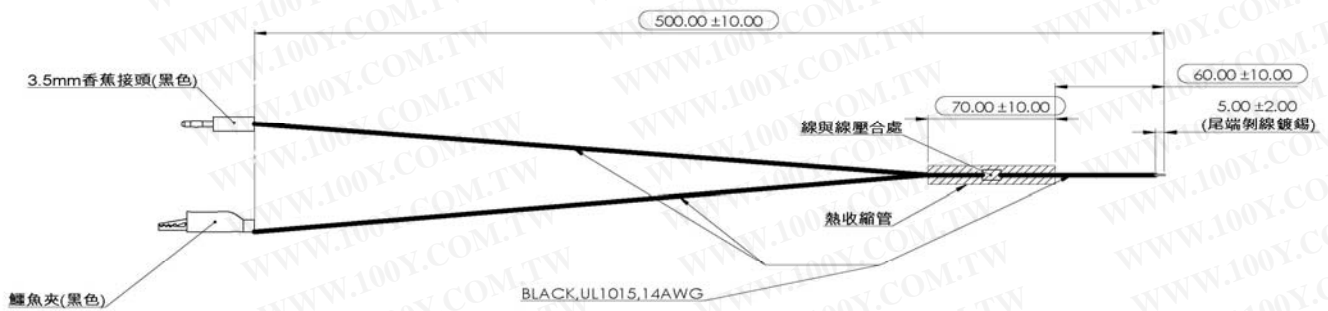

Note:
1. Wire: BLACK, UL1015, 14AWG
2. denote critical dimension

Tolerance Unspecified

Select V			V	Select V			V
	A	B	C		A	B	C
0.5~3	±0.03	±0.05	±0.08	315~1000	±0.03	±0.8	±1.5
3~6	±0.05	±0.1	±0.15	1000~2000	±0.05	±1.2	±2.0
6~30	±0.08	±0.2	±0.30	0~30°	±0.1°	±0.3°	±0.8°
30~120	±0.12	±0.3	±0.40	31~60°	±0.3°	±0.5°	±1.0°
120~315	±0.20	±0.5	±1.0	61~90°	±0.5°	±0.8°	±1.2°

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)