


15EDGKM-3.5/3.81



订购方式：

PDF文档下载

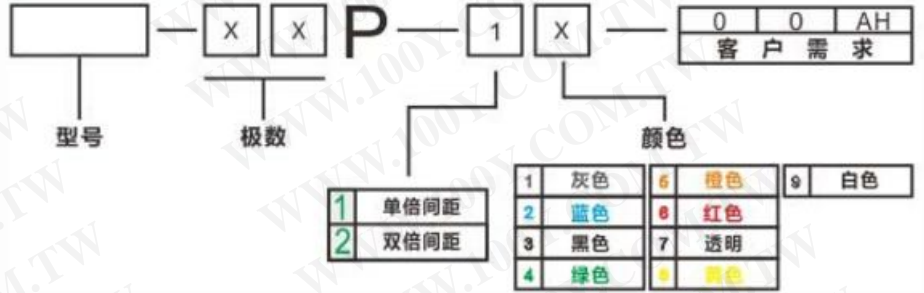

项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch) [mm]	3.5/3.81
极数 (Poles)	02-24P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40025627
额定电压 (Rated voltage) [V]	250
额定电流 (Rated current) [A]	7
额定连接容量 (Rated connection capacity) (solid/stranded) [mm ²]	1.5
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II/2/II
额定冲击电压 (Rated impulse voltage) [KV]	2.5
额定扭矩 (Rated torque) [N·m]	0.2
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

应用组别(Use group)	B	C	D
额定电压(Rated voltage) [V]	300	/	300
额定电流(Rated current) [A]	8	/	8
额定连接容量(Rated connection capacity) (solid/stranded) [AWG]	28-16		
额定扭矩 (Rated torque) [Lb. in]	1.77		
通用数据(General data)	/		
螺丝(Screw)	M2		
阻燃等级(Inflammability class)UL94	V-0		
环境温度(Ambient temperature) [°C]	-40~+105		
相对湿度(Relative humidity)	5%-95%		
抽样检验标准(Inspection standard)	MIL-STD-105E II		
允收水准(AQL)	0.65		
保质期(Warranty)	12 months		
材质和电镀(Material and plating)	/		
绝缘材质(Housing)	PA66		
螺丝(Screws)	Steel, Zn plated 钢, 镀锌		
触点材料(Contact)	Copper alloy, Sn plated 铜合金, 镀锡		
方盒(Cage)	Copper alloy, Ni plated 铜合金, 镀镍		
接线方法 (Wire connecting)			
推荐剥线长度6-7mm; Recommended stripping length 6-7mm;			
1.) 单股硬导线, 剥好对应长度的导线后, 用额定的扭力拧紧; For solid wire, stripping wire to the appointed length, then tightening with rated torque.			
2.) 多股柔性导线, 剥好对应长度的导线后, 可以直接连接或者配套使用对应标准规格的冷压端头, 用额定的扭力拧紧; For stranded wire: stripping wire to the appointed length, mating with corresponding type of ferrule, then tightening with rated torque.			
注意事项: 扭力要平稳, 不能使用爆发力; (Tightening process should be steady, can't use explosive force.)			

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REV	ECN	DESCRIPTION	DRFT	DATE

NOTES1:

- 1. Rated voltage/current : 300V / 8A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M2 , 1.77Lb.in
- 4. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(kV)	2.5kV
Rate voltage(V)	250V
Rate current(A)	7A







- 2. Torque value : M2 , 0.2N·m
- 3. Wire range : 0.5~1.5mm²

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 3.5/3.81mm, Poles : N=02~24P
- 3. Stripping length : 6~7mm
- 4. Operating temperature : -40°C~+105°C
- 5. Undimensioned tolerances:

Pitch range	In		mm		Nominal dimension range	mm	Tolerance
	Over	Under	Over	Under			
6	TO	TO	TO	TO	0.1/10	±2	
	10	10	10	10	150		
	150	150	150	150	±2		

6. RoHS Compliance

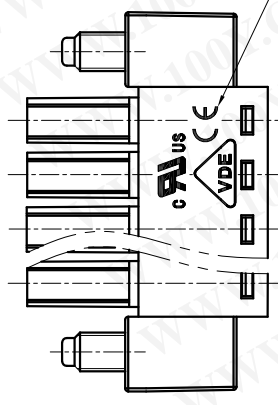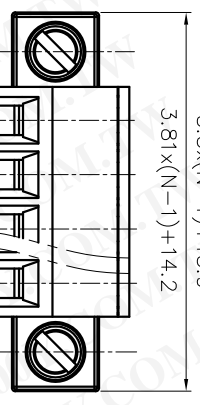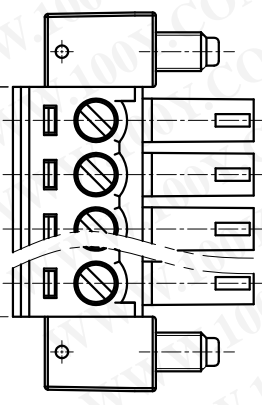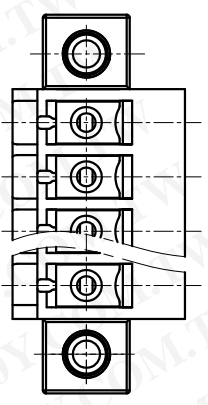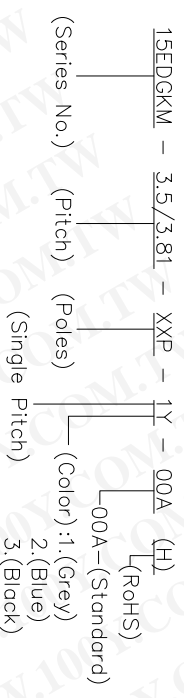

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

DETACHED LISTS

PART NO.:	/	NAME:	NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司	
APPD:	/	TITLE:	CUSTOMER DRAWING	
CHKD:	/	DRAWING NO.:	/	REV
DRFT:	/	THIRD ANGLE PROJECTION	DO NOT SCALE DRAWING	SCALE
			SCALE	1:1

15EDGKM-5.08



订购方式：

PDF文档下载



项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch) [mm]	5.08
极数 (Poles)	02-12P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40025627
额定电压 (Rated voltage) [V]	450
额定电流 (Rated current) [A]	7
额定连接容量 (Rated connection capacity) (solid/stranded) [mm ²]	0.5~1.5
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II/2/II
额定冲击电压 (Rated impulse voltage) [KV]	4.0
额定扭矩 (Rated torque) [N·m]	0.2
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

应用组别(Use group)	B	C	D
额定电压(Rated voltage)[V]	300	/	300
额定电流(Rated current)[A]	8	/	8
额定连接容量(Rated connection capacity) (solid/stranded) [AWG]	28-16		
额定扭矩 (Rated torque) [Lb. in]	1.77		
通用数据(General data)	/		
螺丝(Screw)	M2		
阻燃等级(Inflammability class)UL94	V-0		
环境温度(Ambient temperature)[°C]	-40~+105		
相对湿度(Relative humidity)	5%-95%		
抽样检验标准(Inspection standard)	MIL-STD-105E II		
允收水准(AQL)	0.65		
保质期(Warranty)	12 months		
材质和电镀(Material and plating)	/		
绝缘材质(Housing)	PA66		
螺丝(Screws)	Steel, Zn plated钢 镀锌		
触点材料(Contact)	Copper alloy, Sn plated铜合金, 镀锡		
方盒(Cage)	Copper alloy, Ni plated铜合金, 镀镍		
接线方法 (Wire connecting)			
推荐剥线长度6-7mm; Recommended stripping length 6-7mm;			
1.) 单股硬导线, 剥好对应长度的导线后, 用额定的扭力拧紧; For solid wire, stripping wire to the appointed length, then tightening with rated torque.			
2.) 多股柔性导线, 剥好对应长度的导线后, 可以直接连接或者配套使用对应标准规格的冷压端头, 用额定的扭力拧紧; For stranded wire: stripping wire to the appointed length, mating with corresponding type of ferrule, then tightening with rated torque.			
注意事项: 扭力要平稳, 不能使用爆发力; (Tightening process should be steady, can't use explosive force.)			

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

1. Rated voltage/current : 300V / 8A
2. Withstanding voltage : AC1600V/1Min.
3. Torque value : M2 , 1.77Lb.in
4. Wire range : 28~16AWG

IEC Standard

1. Pollution degree	2
Overvoltage category	II
Rate impulse voltage(KV)	4.0KV
Rate voltage(V)	450V
Rate current(A)	7A

2. Torque value : M2 , 0.2N·m
3. Wire range : 0.5~1.5mm²






NOTES2:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=02~12P
3. Stripping length : 6~7mm
4. Operating temperature : -40°C~+105°C
5. Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				— ∩ □	
To	Over	To	Over	To	Over	0.1/10	
6	10	30	60	100	150	<	
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6. RoHS Compliance

15EDGKM - 5.08 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color) (RoHS)
 00A-(Standard)
 (Color): 1.(Grey)2.(Blue)3.(Black)4.(Green)5.(Orange)
 6.(Red)7.(Transparent)8.(Yellow)9.(White)

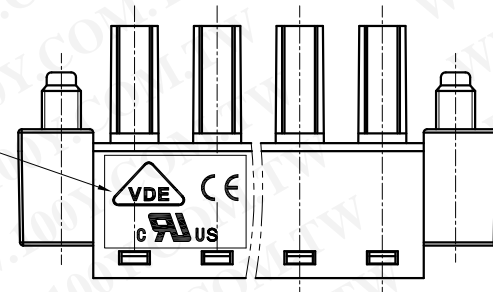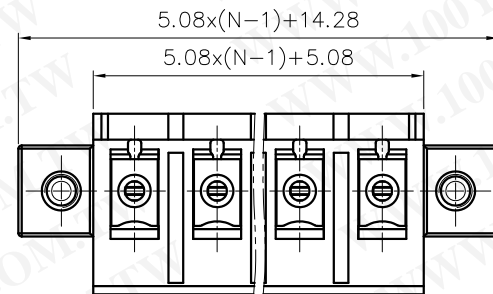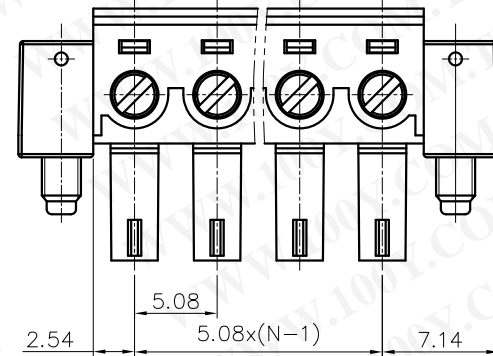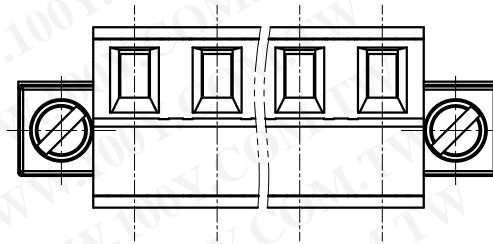


DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	 THIRD ANGLE PROJECTION		 DO NOT SCALE DRAWING		DRAWING NO.: / SHEET 1/1
PART NO.: /		宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD NAME: 15EDGKM-5.08-XXP-1Y-00A(H)			
TITLE: CUSTOMER DRAWING		REV	D0		
SCALE: 1:1					

15EDGRM-3.5/3.81



订购方式：

PDF文档下载

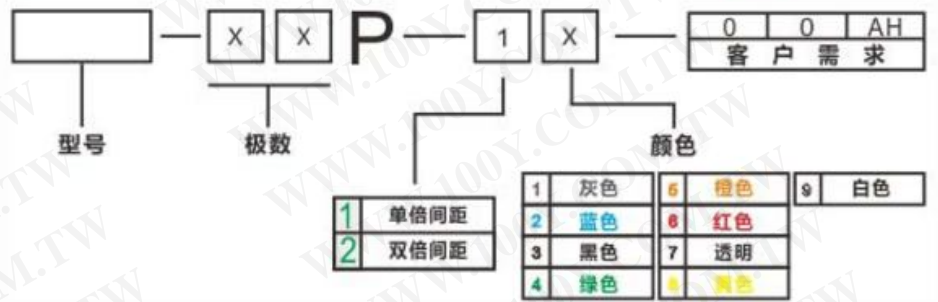

项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch) [mm]	3.5/3.81
极数 (Poles)	02-22P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40025627
额定电压 (Rated voltage) [V]	250
额定电流 (Rated current) [A]	7
额定连接容量 (Rated connection capacity) (solid/stranded) [mm ²]	/
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II/2/II
额定冲击电压 (Rated impulse voltage) [KV]	2.5
额定扭矩 (Rated torque) [N·m]	/
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

应用组别 (Use group)	B	C	D
额定电压 (Rated voltage) [V]	300	/	300
额定电流 (Rated current) [A]	8	/	8
额定连接容量 (Rated connection capacity) (solid/stranded) [AWG]	/	/	/
额定扭矩 (Rated torque) [Lb. in]	/	/	/
通用数据 (General data)	/	/	/
剥线长度 (Stripping length) [mm]	/	/	/
螺丝 (Screw)	/	/	/
阻燃等级 (Inflammability class) UL94	/	V-0	/
环境温度 (Ambient temperature) [°C]	/	-40~+105	/
相对湿度 (Relative humidity)	/	5%-95%	/
抽样检验标准 (Inspection standard)	/	MIL-STD-105E II	/
允收水准 (AQL)	/	0.65	/
保质期 (Warranty)	/	12 months	/
材质和电镀 (Material and plating)	/	/	/
绝缘材质 (Housing)	/	PA66	/
触点材料 (Contact)	/	Copper alloy, Sn plated 铜合金, 镀锡	/

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard







1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:


- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=02~22P
- 3.Operating temperature : -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							0.1/10	
	Over 6 TO 6	Over 10 TO 10	Over 10 TO 24	Over 30 TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5.RoHS Compliance

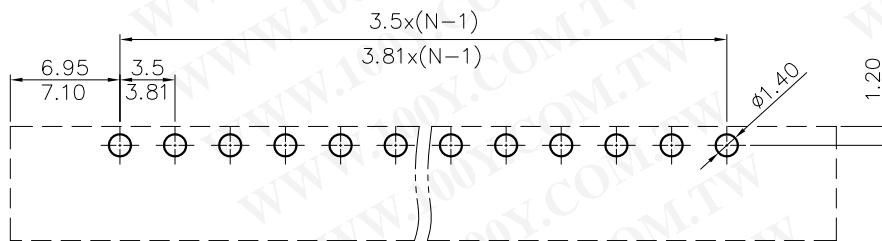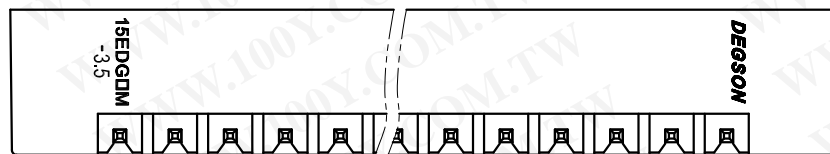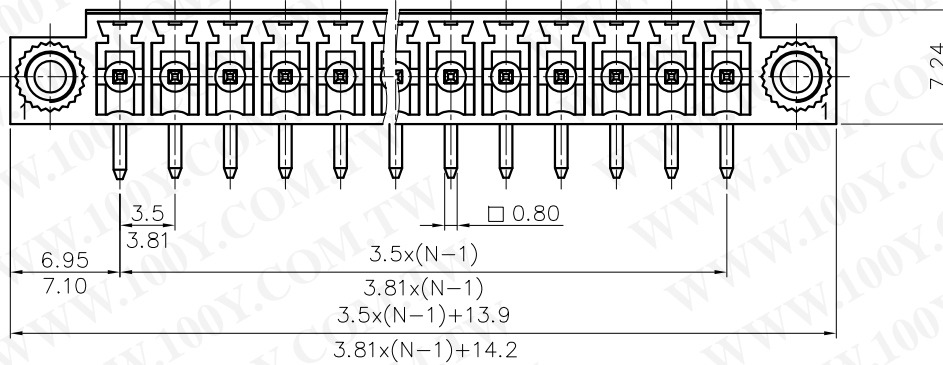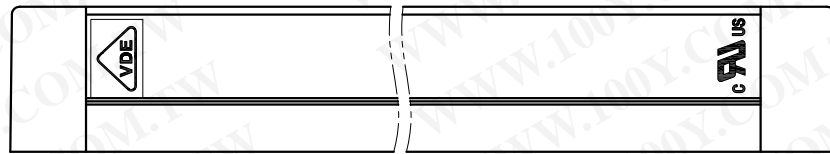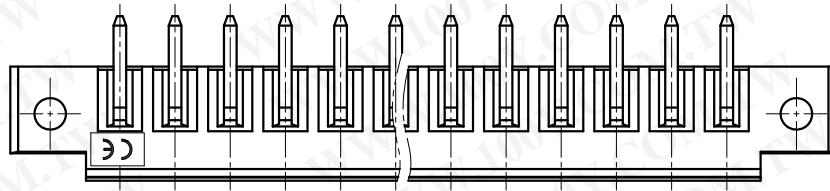

PCB LAYOUT

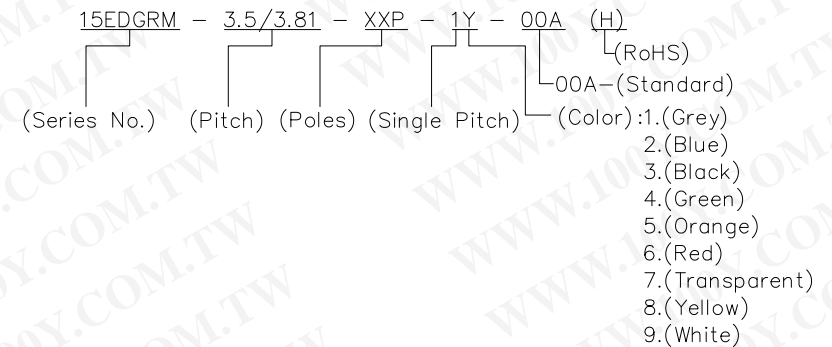


DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 15EDGRM-3.5/3.81-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING		REV	DO
	DRFT:	DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1

15EDGRM-5.08



订购方式：


PDF文档下载

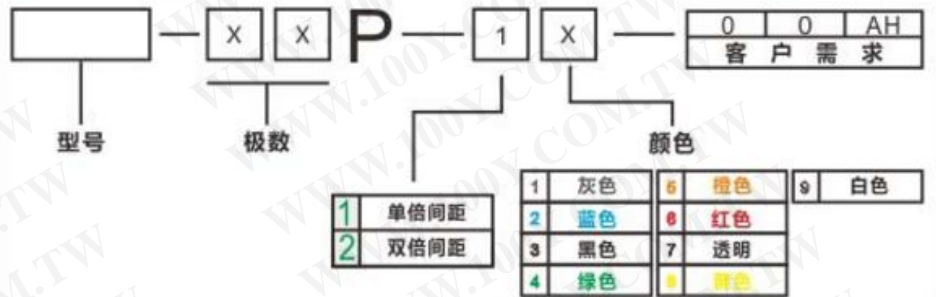

项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch)[mm]	5.08
极数 (Poles)	2-12P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40022408
额定电压 (Rated voltage)[V]	450
额定电流 (Rated current)[A]	7
额定连接容量 (Rated connection capacity)(solid/stranded) [mm ²]	/
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II /2/II
额定冲击电压 (Rated impulse voltage)[kV]	2.5
额定扭矩 (Rated torque)[N·m]	/
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

应用组别 (Use group)	B	C	D
额定电压 (Rated voltage)[V]	300	/	300
额定电流 (Rated current)[A]	8	/	8
额定连接容量 (Rated connection capacity) (solid/stranded) [AWG]	/	/	/
额定扭矩 (Rated torque) [Lb. in]	/	/	/
通用数据 (General data)	/	/	/
剥线长度 (Stripping length)[mm]	/	/	/
螺丝 (Screw)	/	/	/
阻燃等级 (Inflammability class)UL94	/	V-0	/
环境温度 (Ambient temperature)[°C]	/	-40~+105	/
相对湿度 (Relative humidity)	/	5%-95%	/
抽样检验标准 (Inspection standard)	/	MIL-STD-105E II	/
允收水准 (AQL)	/	0.65	/
保质期 (Warranty)	/	12 months	/
材质和电镀 (Material and plating)	/	/	/
绝缘材质 (Housing)	/	PA66	/
触点材料 (Contact)	/	Copper alloy, Sn plated铜合金, 镀锡	/

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

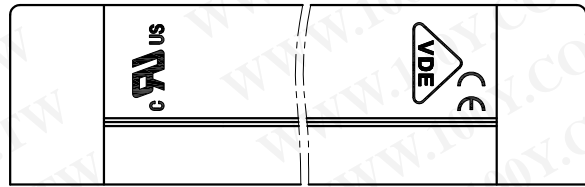

NOTES1:

UL Standard

1. Rated Voltage/Current : 300V / 8A
2. Withstanding Voltage : AC1600V/1Min.

IEC Standard




1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	450V
Rate Current(A)	7A

NOTES2:



1. Dimension shall be interpreted per ASME Y14.5-2009
2. Pitch : 5.08mm, Poles : N=02~12P
3. Operating temperature: -40°C~+105°C
4. Undimensioned Tolerances:

Pitch Range In mm		Nominal Dimension Range					0.1/10
To	Over	To	Over	To	Over		
6	10	30	60	100	150	±2'	
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00		

5. RoHS Compliance

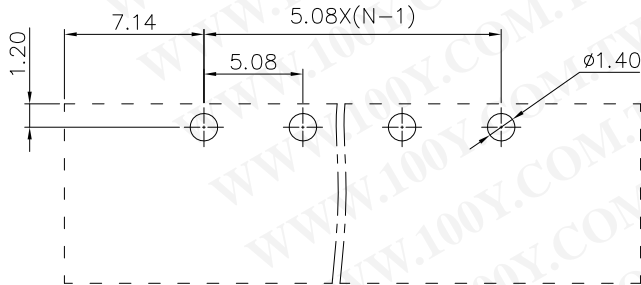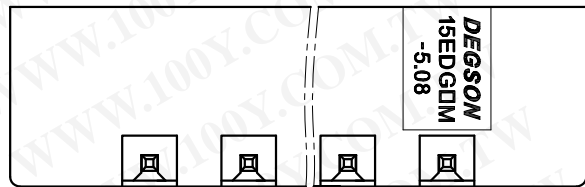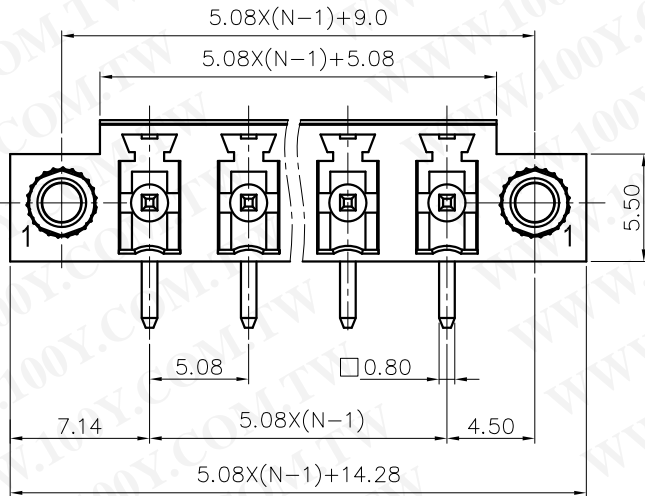

PCB LAYOUT

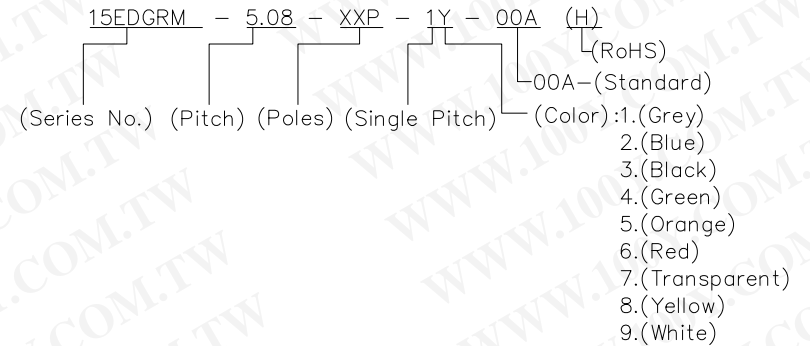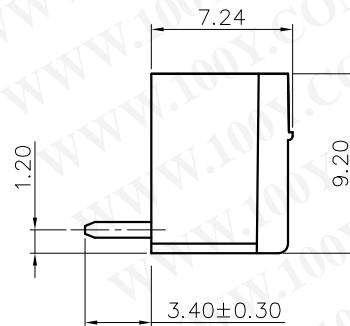

DETACHED LISTS	PART NO.:	/			
	APPD:	/			
	CHKD:	/			
	DRFT:	/			
	NAME:		NINGBO DEGSON ELECTRICAL CO., LTD		
TITLE:		CUSTOMER DRAWING			
DRAWING NO.:		/			
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING			
REV		DO			
SHEET		1/1			
SCALE		1:1			

15EDGVM-3.5/3.81



订购方式：

PDF文档下载



项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch) [mm]	3.5/3.81
极数 (Poles)	02-22P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40025627
额定电压 (Rated voltage) [V]	250
额定电流 (Rated current) [A]	7
额定连接容量 (Rated connection capacity) (solid/stranded) [mm ²]	/
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II/2/II
额定冲击电压 (Rated impulse voltage) [KV]	2.5
额定扭矩 (Rated torque) [N·m]	/
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

应用组别 (Use group)	B	C	D
额定电压 (Rated voltage) [V]	300	/	300
额定电流 (Rated current) [A]	8	/	8
额定连接容量 (Rated connection capacity) (solid/stranded) [AWG]	/	/	/
额定扭矩 (Rated torque) [Lb. in]	/	/	/
通用数据 (General data)	/	/	/
剥线长度 (Stripping length) [mm]	/	/	/
螺丝 (Screw)	/	/	/
阻燃等级 (Inflammability class) UL94	/	V-0	/
环境温度 (Ambient temperature) [°C]	/	-40~+105	/
相对湿度 (Relative humidity)	/	5%-95%	/
抽样检验标准 (Inspection standard)	/	MIL-STD-105E II	/
允收水准 (AQL)	/	0.65	/
保质期 (Warranty)	/	12 months	/
材质和电镀 (Material and plating)	/	/	/
绝缘材质 (Housing)	/	PA66	/
触点材料 (Contact)	/	Copper alloy, Sn plated 铜合金, 镀锡	/

REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

NOTES1:

UL Standard

- 1.Rated voltage/current : 300V / 8A
- 2.Withstanding voltage : AC1600V/1Min.

IEC Standard







1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	2.5KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 3.5/3.81mm, Poles : N=02~22P
- 3.Operating temperature : -40°C~+105°C
- 4.Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							0.1/10	
	TO 6	Over 6 TO 10	Over 10 TO 24	TO 30	Over 30 TO 60	Over 60 TO 100	Over 100 TO 150		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

5.RoHS Compliance

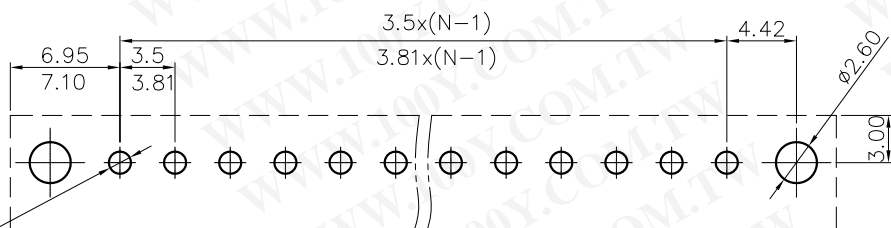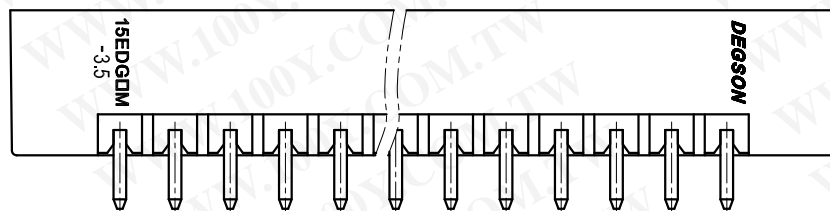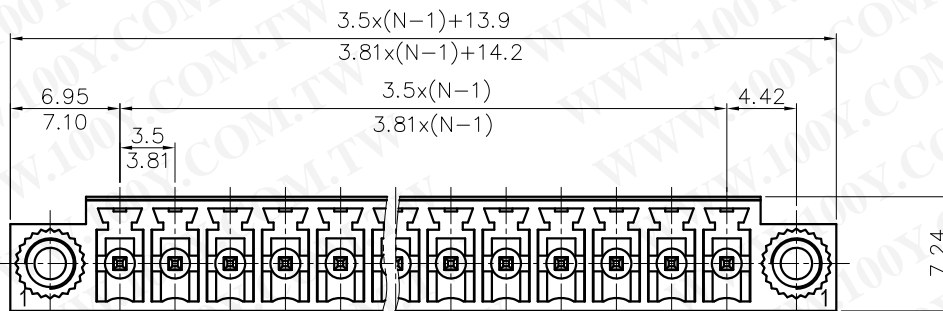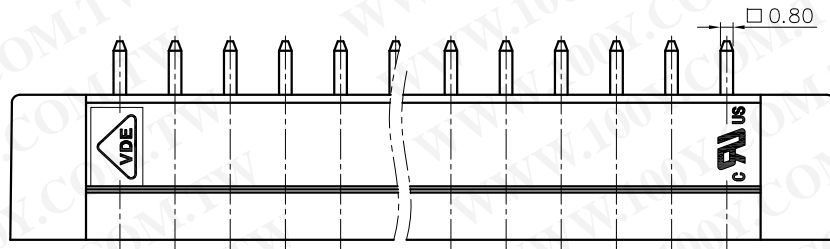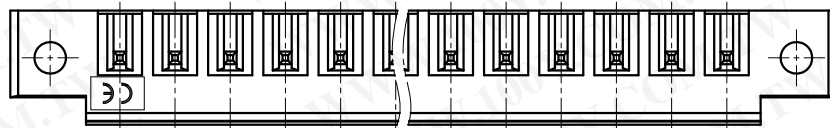

15EDGVM - 3.5/3.81 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 15EDGVM-3.5/3.81-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING		REV	DO
	DRFT:	DRAWING NO.:		SHEET	1/1
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SCALE	1:1

φ1.40

PCB LAYOUT

THIRD ANGLE PROJECTION

MM (INCH)

DO NOT SCALE DRAWING


SCALE 1:1

15EDGVM-5.08



订购方式：

PDF文档下载





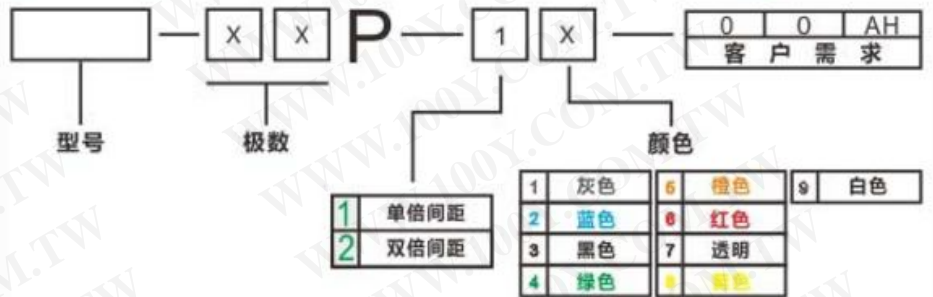


项目 (Item)	数据 (Data)
认证 (APPROVAL)	认证查询连接 认证查询连接
测试标准 (Test standard)	IEC/EN61984: 2009 / UL1059
产品间距 (Pitch) [mm]	5.08
极数 (Poles)	2-12P
EN61984测试数据 (EN61984 Test data)	VDE certificate NO. 40022408
额定电压 (Rated voltage) [V]	450
额定电流 (Rated current) [A]	7
额定连接容量 (Rated connection capacity) (solid/stranded) [mm ²]	/
过压类别/污染等级/绝缘材料组别 (Surge voltage category/pollution degree/material group)	II /2/II
额定冲击电压 (Rated impulse voltage) [KV]	2.5
额定扭矩 (Rated torque) [N·m]	/
UL1059测试数据 (UL1059 Test data)	UL File Number E228872

应用组别 (Use group)	B	C	D
额定电压 (Rated voltage) [V]	300	/	300
额定电流 (Rated current) [A]	8	/	8
额定连接容量 (Rated connection capacity) (solid/stranded) [AWG]	/	/	/
额定扭矩 (Rated torque) [Lb. in]	/	/	/
通用数据 (General data)	/	/	/
剥线长度 (Stripping length) [mm]	/	/	/
螺丝 (Screw)	/	/	/
阻燃等级 (Inflammability class) UL94	/	V-0	/
环境温度 (Ambient temperature) [°C]	/	-40~+105	/
相对湿度 (Relative humidity)	/	5%-95%	/
抽样检验标准 (Inspection standard)	/	MIL-STD-105E II	/
允收水准 (AQL)	/	0.65	/
保质期 (Warranty)	/	12 months	/
材质和电镀 (Material and plating)	/	/	/
绝缘材质 (Housing)	/	PA66	/
触点材料 (Contact)	/	Copper alloy, Sn plated 铜合金, 镀锡	/

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

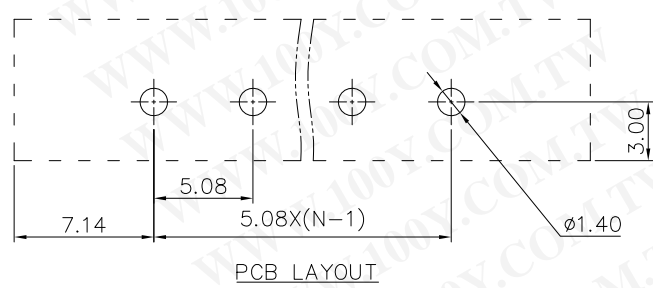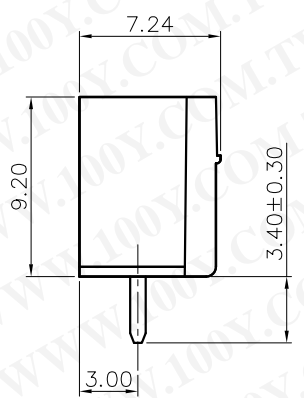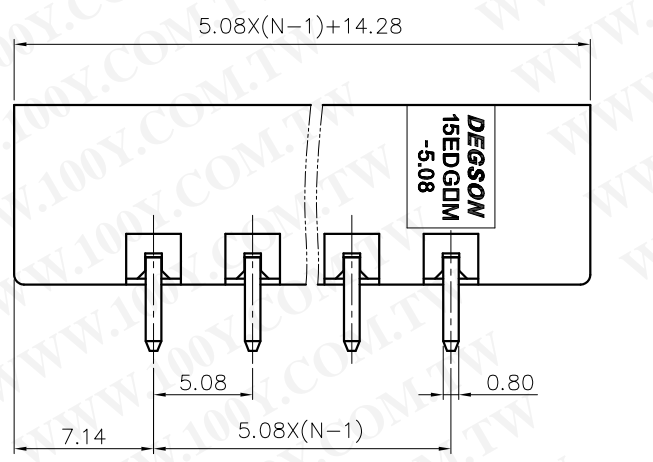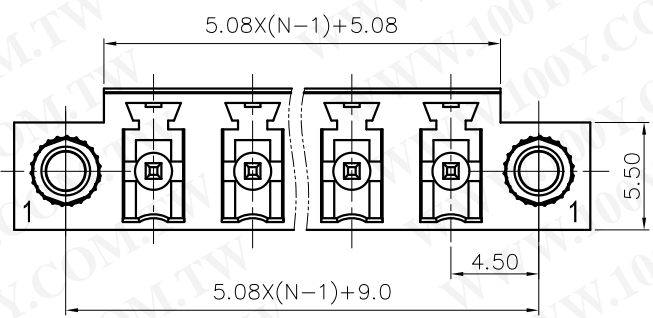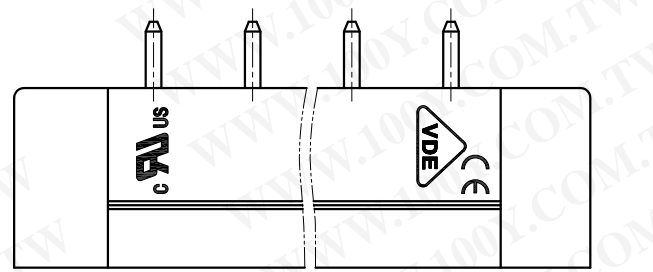

NOTES1:
 UL Standard
 1. Rated Voltage/Current : 300V / 8A
 2. Withstanding Voltage : AC1600V/1Min.

IEC Standard

1. Pollution Degree	2
Overvoltage Category	II
Rate Impulse Voltage(KV)	4.0KV
Rate Voltage(V)	250V
Rate Current(A)	7A

NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.08mm, Poles : N=02~12P
 3. Operating temperature: -40°C~+105°C
 4. Undimensioned Tolerances:

Pitch mm	Range In			Nominal Dimension Range				mm	
	TO	Over TO	Over TO	TO	Over TO	Over TO	Over TO		
5.08	6	10	24	30	60	100	150	0.1/10	
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2*

5. RoHS Compliance

15EDGVM - 5.08 - XXP - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color) (RoHS)

00A-(Standard)

1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: 15EDGVM-5.08-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING		SHEET	1/1
		SCALE: 1:1			