

THIS DRAWING IS UNPUBLISHED.


RELEASED FOR PUBLICATION

© COPYRIGHT - By - TE CONNECTIVITY



ALL RIGHTS RESERVED.

REVISIONS

P	LYR	DESCRIPTION	DATE	DWN	APVD
V		REVISED PER ECR-20-000822	27MAY2020	PC	SW

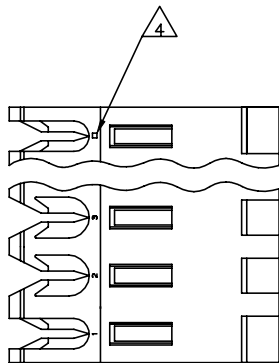

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

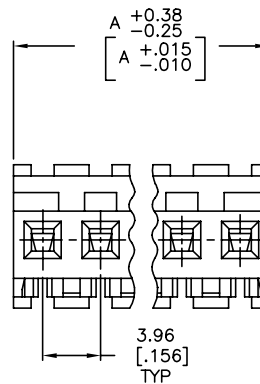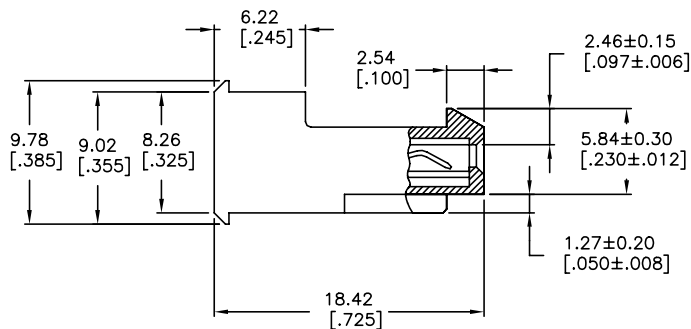

1 MATERIAL: CONNECTOR - NYLON UL94V-2 (RED).
CONTACTS - 0.30[.012] THICK COPPER ALLOY
(BRIGHT TIN-LEAD 0.00203[.000080] MIN. THICK
FOR CONTACTS 640601-2 THRU 2-640601-4)
(MATTE WHISKER MITIGATED TIN 0.00203[.000080] MIN
THICKNESS OVER NICKEL UNDERPLATE FOR
3-640601-2 THRU 5-640601-4).

2 CONTACTS ACCEPT 22 AWG WIRE WITH 2.41[.095] MAX INSULATION DIAMETER.

3 CONTACTS MUST ACCEPT 1.14±0.03[.045±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.

4 IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.

5 DIMENSIONS IN BRACKETS ARE IN INCHES.

6 HOUSING FEATURES ARE: FEED-THRU WITH LOCKING RAMP.

7 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

8 OBSOLETE PARTS

OBSOLETE	95.10	[3.744]	24	5-640601-4
	91.14	[3.588]	23	5-640601-3
	87.17	[3.432]	22	5-640601-2
	83.21	[3.276]	21	5-640601-1
	79.25	[3.120]	20	5-640601-0
	75.29	[2.964]	19	4-640601-9
	71.32	[2.808]	18	4-640601-8
	67.36	[2.652]	17	4-640601-7
	63.40	[2.496]	16	4-640601-6
	59.44	[2.340]	15	4-640601-5
	55.47	[2.184]	14	4-640601-4
	51.51	[2.028]	13	4-640601-3
	47.55	[1.872]	12	4-640601-2
	43.59	[1.716]	11	4-640601-1
	39.62	[1.560]	10	4-640601-0
	35.66	[1.404]	9	3-640601-9
	31.70	[1.248]	8	3-640601-8
	27.74	[1.092]	7	3-640601-7
	23.77	[.936]	6	3-640601-6
	19.81	[.780]	5	3-640601-5
	15.85	[.624]	4	3-640601-4
	11.89	[.468]	3	3-640601-3
	7.92	[.312]	2	3-640601-2
OBSOLETE	95.10	[3.744]	24	2-640601-4
	91.14	[3.588]	23	2-640601-3
	87.17	[3.432]	22	2-640601-2
	83.21	[3.276]	21	2-640601-1
	79.25	[3.120]	20	2-640601-0
	75.29	[2.964]	19	1-640601-9
	71.32	[2.808]	18	1-640601-8
	67.36	[2.652]	17	1-640601-7
	63.40	[2.496]	16	1-640601-6
	59.44	[2.340]	15	1-640601-5
	55.47	[2.184]	14	1-640601-4
	51.51	[2.028]	13	1-640601-3
	47.55	[1.872]	12	1-640601-2
	43.59	[1.716]	11	1-640601-1
	39.62	[1.560]	10	1-640601-0
	35.66	[1.404]	9	640601-9
	31.70	[1.248]	8	640601-8
	27.74	[1.092]	7	640601-7
	23.77	[.936]	6	640601-6
	19.81	[.780]	5	640601-5
	15.85	[.624]	4	640601-4
	11.89	[.468]	3	640601-3
	7.92	[.312]	2	640601-2

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. LEWIS 12 FEB 91	TE Connectivity Ltd.	
DIMENSIONS: mm [INCHES]		CHK R. SWING 12 FEB 91	APVD D. CLARK 19 FEB 91	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME MTA-156 CONNECTOR ASSEMBLY, 22 AWG, STANDARD		
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		PRODUCT SPEC 108-1051		
MATERIAL 1		APPLICATION SPEC 114-1020		
FINISH 1		SIZE A2		
		CAGE CODE 00779		
		DRAWING NO C=640601		
		RESTRICTED TO -		
		CUSTOMER DRAWING		
		SCALE 4:1		
		SHEET 1 OF 1		
		REV V		