
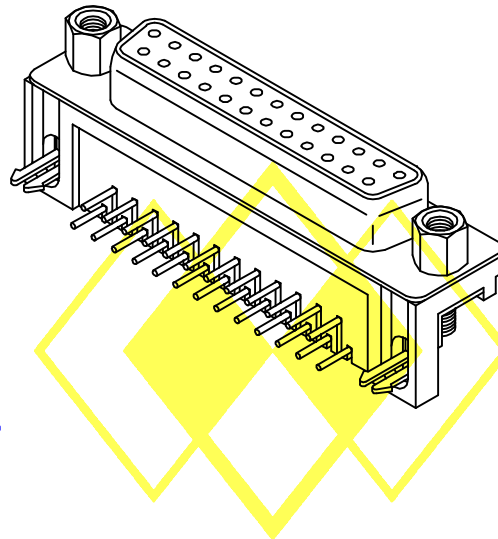


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

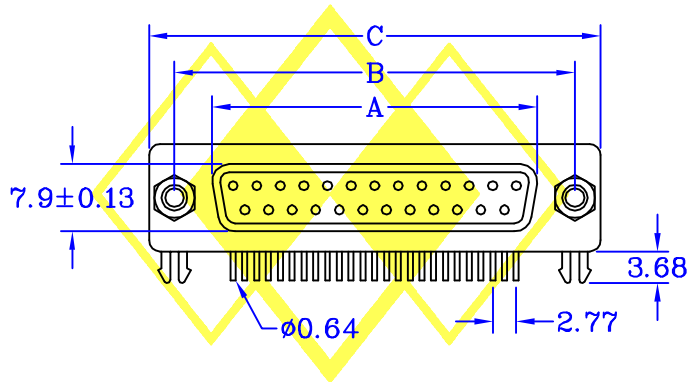

SPECIFICATIONS



ELECTRICAL

- Contact Current Rating : 5 Ampere
- Contact Resistance : 25 mΩ Max
- Insulator Resistance : 1,000 MΩ Min
- Dielectric Withstanding Voltage : 500 V AC RMS 60 Seconds

MATERIAL

- Insulator : PBT UL 94V-0
- Contact : Brass
- Contact Plated : Gold Plated OR Tin Plated
- Shell : Steel
- Shell Plated : Nickel Plated
- Screw : Brass
- Screw Plated : Nickel Plated

Operation Temperature : - 40°C to + 105°C

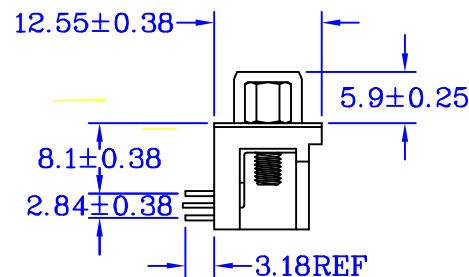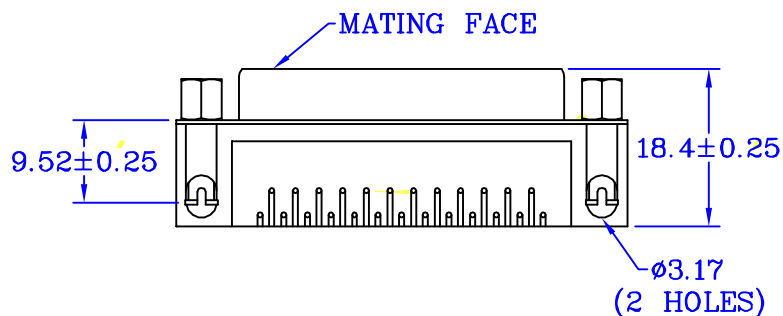

DRASXXSB102	DIMENSIONS		
CONTACTS	A	B	C
9	16.33	24.99	30.81
15	24.66	33.32	39.14
25	38.38	47.04	53.04
37	54.84	63.50	69.32

繪圖 DRAWN BY
FUFU

日期 DATE

核對 CHECKED BY
WENDY

比例 SCALE
1:1

DRASXXSB102

圖號 361-XX-10
DRAWING NO.