
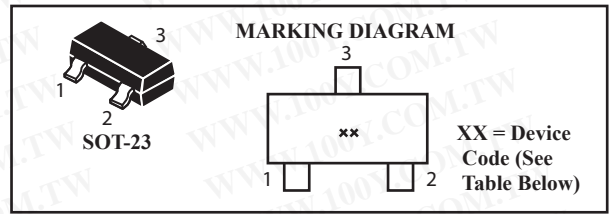


勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
 Http://www.100y.com.tw

BC856A/B-BC857A/B
 BC858A/B/C-BC859B/C

General Purpose Transistor PNP Silicon



Maximum Ratings ($T_A=25^\circ\text{C}$ unless otherwise noted)

Rating	Symbol	Value	Unit
Collector-Emitter Voltage	BC856	-65	V
	BC857	-45	
	BC858, BC859	-30	
Collector-Base Voltage	BC856	-80	V
	BC857	-50	
	BC858, BC859	-30	
Emitter-Base Voltage	V_{EBO}	-5.0	V
Collector Current-Continuous	I_C	-100	mAdc

Thermal Characteristics

Characteristics	Symbol	Max	Unit
Total Device Dissipation FR-5 Board (1) (Note 1.) $T_A=25^\circ\text{C}$ Derate above 25°C	P_D	225 1.8	mW $\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	556	$^\circ\text{C}/\text{W}$
Total Device Dissipation Alumina Substrate, (Note 2.) $T_A=25^\circ\text{C}$ Derate above 25°C	P_D	300 2.4	mW $\text{mW}/^\circ\text{C}$
Thermal Resistance, Junction to Ambient	$R_{\theta JA}$	417	$^\circ\text{C}/\text{W}$
Junction and Storage, Temperature	T_J, T_{stg}	-55 to +150	$^\circ\text{C}$

1.FR-5=1.0 x 0.75 x 0.062 in. 2.Alumina=0.4 x 0.3 x 0.024 in. 99.5% alumina.

Electrical Characteristics ($T_A=25^\circ\text{C}$ Unless Otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

Off Characteristics

Collector-Emitter Breakdown Voltage ($I_C = -10\text{mA}$)	BC856 Series BC857 Series BC858, BC859 Series	$V_{(BR)CEO}$	-65 -45 -30	- - -	- - -	V
Collector-Emitter Breakdown Voltage ($I_C = -10\ \mu\text{A}$, $V_{EB} = 0$)	BC856 Series BC857 Series BC858, BC859 Series	$V_{(BR)CES}$	-80 -50 -30	- - -	- - -	V
Collector-Base Breakdown Voltage ($I_C = -10\ \mu\text{A}$)	BC856 Series BC857 Series BC858, BC859 Series	$V_{(BR)CBO}$	-80 -50 -30	- - -	- - -	V
Emitter-Base Breakdown Voltage ($I_E = -1.0\ \mu\text{A}$)	BC856 Series BC857 Series BC858, BC859 Series	$V_{(BR)EBO}$	-5.0 -5.0 -5.0	- - -	- - -	V
Collector Cutoff Current ($V_{CB} = -30\text{V}$) ($V_{CB} = -30\text{V}$, $T_A = 150^\circ\text{C}$)		I_{CBO}	- -	- -	-15 -4.0	nA mA

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BC856A/B-BC857A/B
 BC858A/B/C-BC859B/C

Electrical Characteristics (TA=25°C Unless Otherwise noted)

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

On Characteristics

DC Current Gain ($I_C = -10\mu A, V_{CE} = -5.0V$) BC856A, BC857A, BC858A BC856B, BC857B, BC858B BC858C	h_{FE}	-	90	-	-
($I_C = -2.0mA, V_{CE} = -5.0V$) BC856A, BC857A, BC858A BC856B, BC857B, BC858B, BC859B BC858C, BC859C		125	180	250	
		220	290	475	
		420	520	800	
Collector-Emitter Saturation Voltage ($I_C = -10mA, I_B = -0.5mA$) ($I_C = -100mA, I_B = -5.0mA$)	$V_{CE(sat)}$	-	-	-0.3	V
		-	-	-0.65	
Base-Emitter Saturation Voltage ($I_C = -10mA, I_B = -0.5mA$) ($I_C = -100mA, I_B = -5.0mA$)	$V_{BE(sat)}$	-	-0.7	-	V
		-	-0.9	-	
Base-Emitter On Voltage ($I_C = -10mA, I_B = -0.5mA$) ($I_C = -100mA, I_B = -5.0mA$)	$V_{BE(on)}$	-0.6	-	-0.75	V
		-	-	-0.82	

Small-signal Characteristics

Current-Gain-Bandwidth Product ($I_C = -10mA, V_{CE} = -5.0VDC, f = 100MHz$)	f_T	100	-	-	MHz
Output Capacitance ($V_{CB} = -10V, f = 1.0MHz$)	C_{obo}	-	-	4.5	pF
Noise Figure ($I_C = -0.2mA, V_{CE} = -5.0Vdc, R_s = 2.0k\Omega, f = 1.0kHz, BW = 200Hz$) BC856, BC857, BC858 Series BC859, Series	NF	-	-	10 4.0	dB

Device Marking

BC856A=3A; BC856B=3B; BC857A=3E; BC857B=3F; BC858A=3J
 BC858B=3K; BC858C=3L; BC859B=4B; BC859C=4C

BC856A/B-BC857A/B
BC858A/B/C-BC859B/C

BC857/BC858/BC859 Series

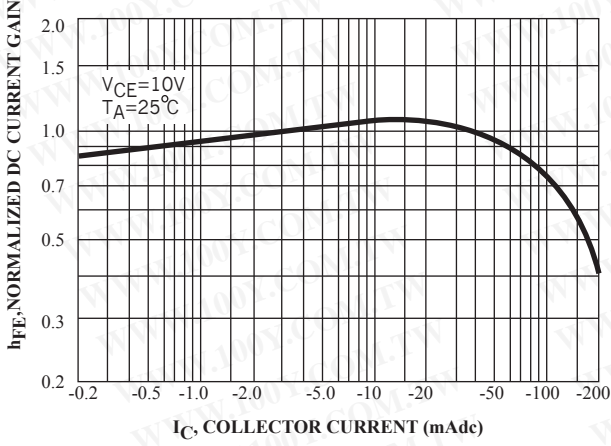


Figure 1. Normalized DC Current Gain

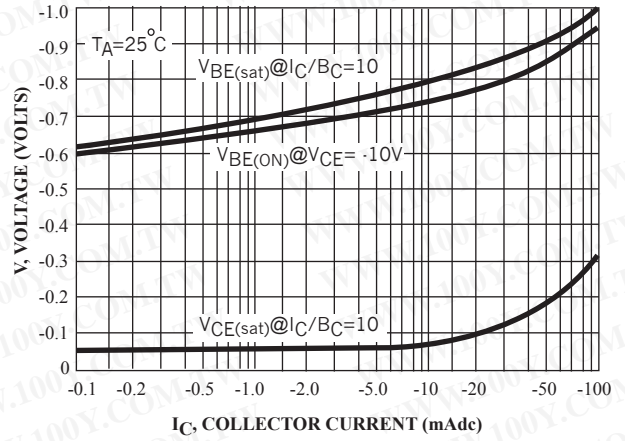


Figure 2. "Saturation" And "On" Voltage

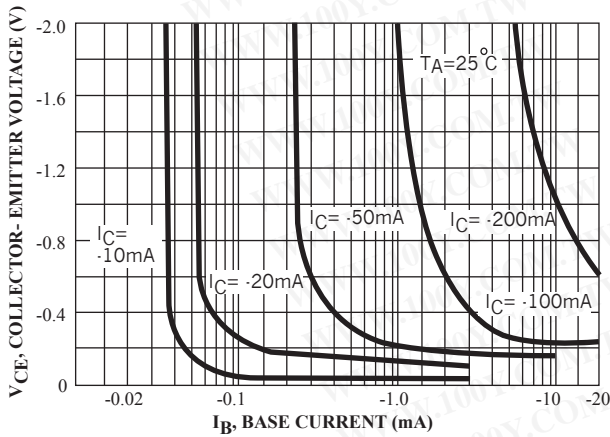


Figure 3. Collector Saturation Region

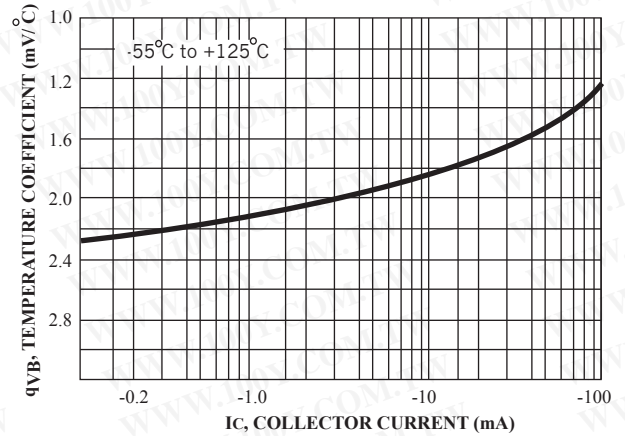


Figure 4. Base-Emitter Temperature Coefficient

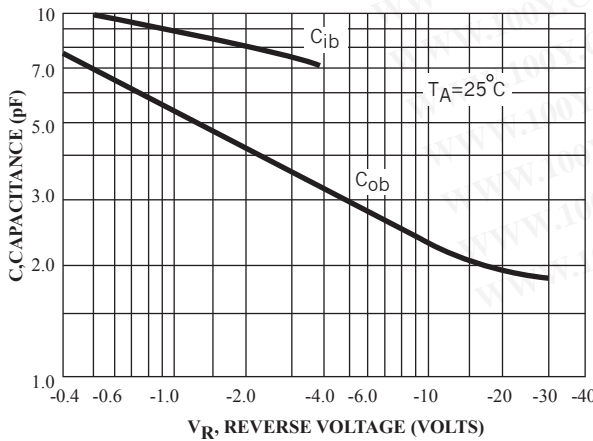


Figure 5. Capacitances

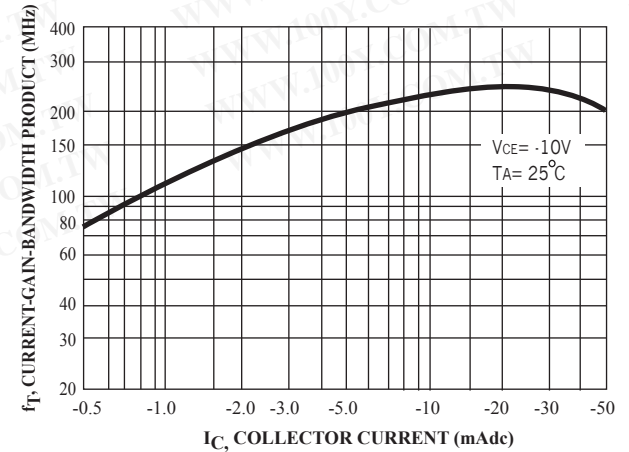


Figure 6. Current-Gain- Bandwidth Product

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

BC856A/B-BC857A/B
BC858A/B/C-BC859B/C

BC856 Series

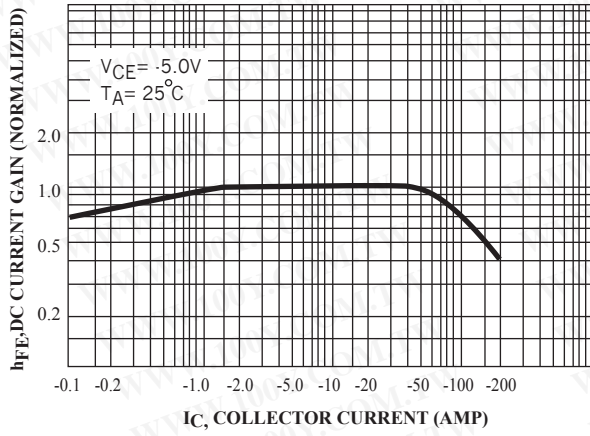


Figure 7. DC Current Gain

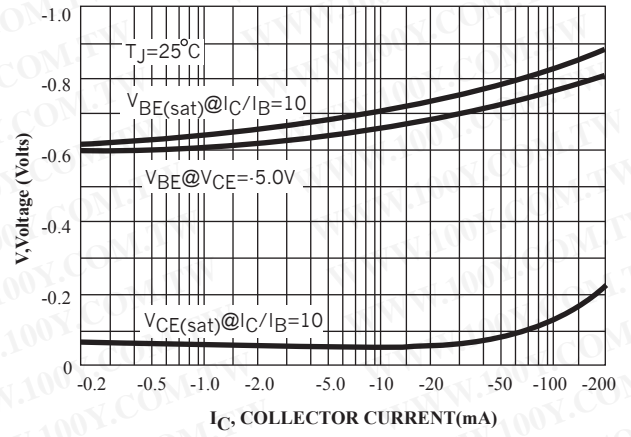


Figure 8. "ON" Voltage

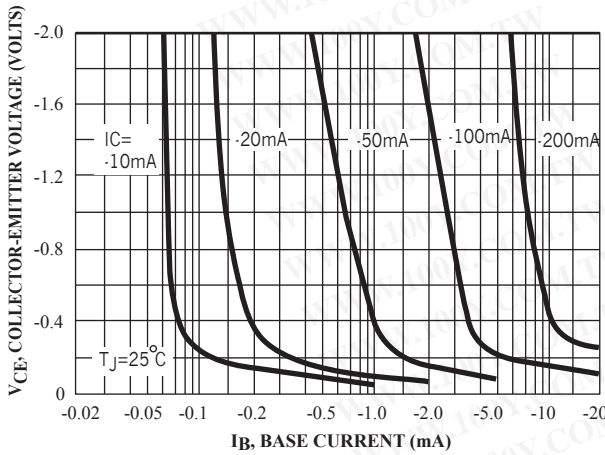


Figure 9. Collector Saturation Region

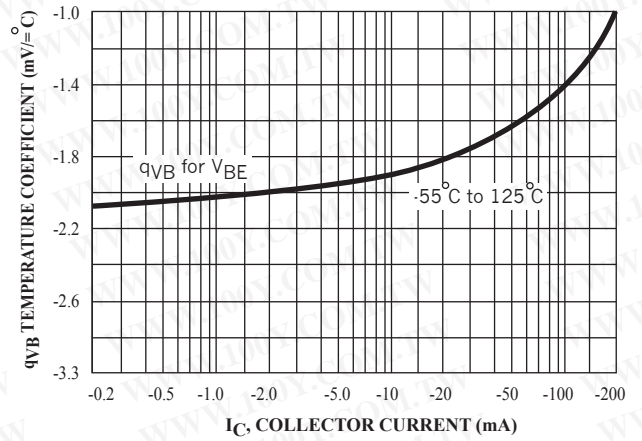


Figure 10. Base-Emitter Temperature Coefficient

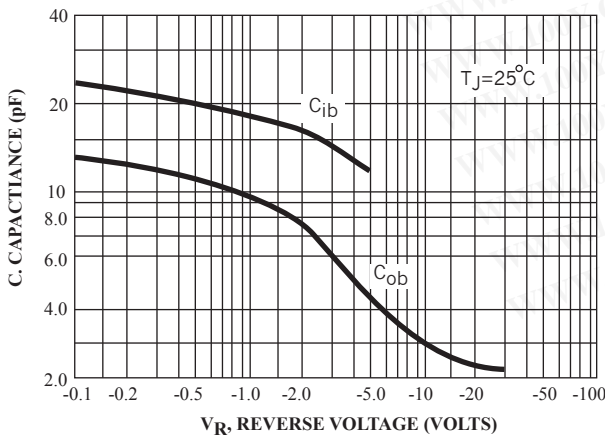


Figure 11. Capacitance

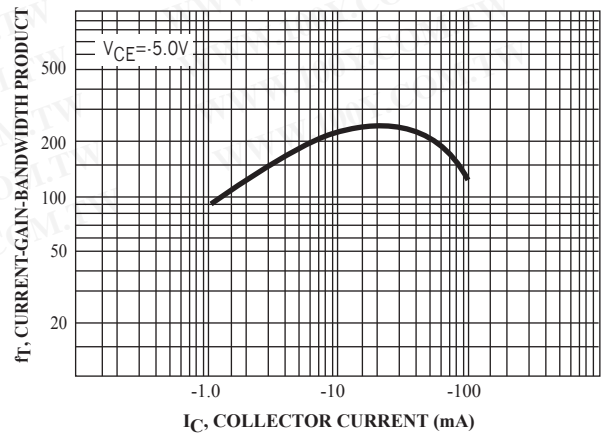


Figure 12. Current-Gain-Bandwidth Product