


技术参数 SPECIFICATIONS


- 线数 (Poles) : 2、3、6、9
- 适用线规 (Applicable wire) : AWG28#~18#
- 适应基板厚度 (Applicable PC board thickness) : 1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 300V.Ac/Dc
- 额定电流 (Current rating) : 10A max
- 接触电阻 (Contact resistance) : ≤0.015Ω
- 绝缘电阻 (Insulation resistance) : ≥1000MΩ
- 耐压 (Withstand voltage) : 1500V.Ac/1min
- 材料 (Material) :
 - 插头 (Plug housing) : 尼龙 (PA66) UL94V-2 (0)
 - 插座 (Receptacle housing) : 尼龙 (PA66) UL94V-2 (0)
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

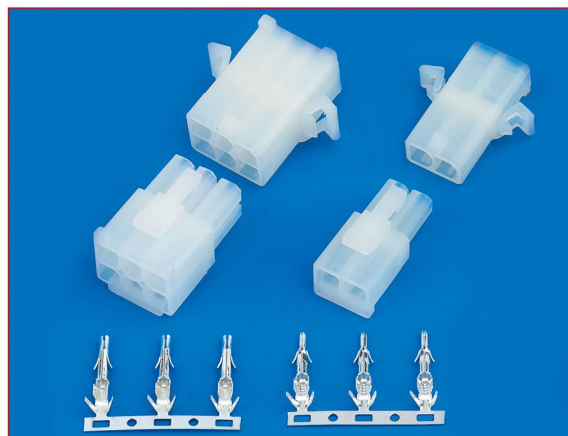


端子 TERMINAL (CL014/OTP)

型号 PART No.	适用线规 Applicable wire mm ²	AWG #	电线外径 Insulation O.D mm	数量 Quantity
HX45000-01PT	0.09~0.3	28~22	0.9~1.7	4000PCS/盘
HX45001-01RT	0.09~0.3	28~22	0.9~1.7	4000PCS/盘
HX45000-21PT	0.2~0.75	24~18	1.5~3.0	3500PCS/盘
HX45001-21RT	0.2~0.75	24~18	1.5~3.0	3500PCS/盘

HX45001-RT (CL014/OTP)



HX45000-PT (CL014/OTP)



线数 (Poles)	额定电压 (Voltage rating)	额定电流 (Current rating)	插头 (Plug Housing)	插座 (Receptacle Housing)	安装尺寸 (Mounting Measurement)
2	300V	10A	HX55001-2R (5025)	HX55000-2P (5025)	
3	300V	10A	HX55001-3R (5025)	HX55000-3PF (5025)	
6	300V	8A	HX55001-6R (5025)	HX55000-6P (5025)	
9	300V	8A	HX55001-9R (5025)	HX55000-9P (5025)	