

1.25mm 超薄端子線 2p3p4p-6p 腳 貼片插頭接插件

A1254MOLEX51146 座

顏色分類: 2P 3P 4P 5P 6P 7P 8P 9P 10P 11P 12P

插頭方向: 單頭 雙頭同向 雙頭反向

裁線長度: 15CM=150MM



线材：1571-28AWG



主要技术特性 MAIN SPECIFICATIONS


间距 (Pitch): 1.25mm
线数 Poles: 2~30
适用线规 Applicable Wire: AWG#28~32#
适用基板厚度 Applicable PC board thickness: 0.6~1.2mm
温度范围 Temperatur Range: -25℃~+85℃
额定电压 Voltage Rating: 125V AC, DC
额定电流 Current Rating: 1A AC, DC
接触电阻 Contact Resistance: 20mΩ Max
绝缘电阻 Insulation Resistance: 100MΩ Min
耐压 Withstanding Voltang: 500V

材 料 MATERIAL

端子 Terminal: Phosphor bronz
孔 座 Housing: PBT UL94V-0
针 座 Wafer: Nylon6T UL94V-0


● Terminal

1.25超薄-T

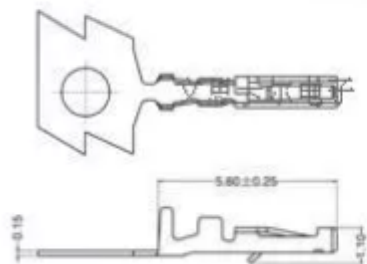


● Housing

1.25超薄-Y

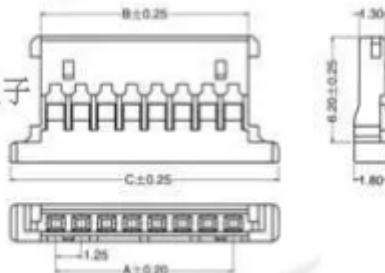

● Wafer

1.25超薄-AWB(卧贴)

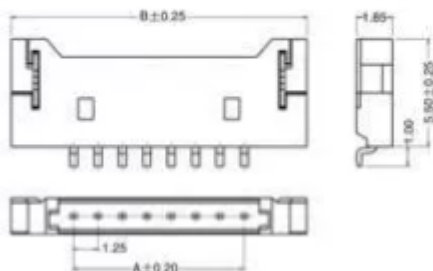

● Housing

型号Type	尺寸(mm)		
	A	B	C
A1250-02Y	1.25	2.72	5.72
A1250-03Y	2.50	3.97	6.97
A1250-04Y	3.75	5.22	8.22
A1250-05Y	5.00	6.47	9.47
A1250-06Y	6.25	7.72	10.72
A1250-07Y	7.50	8.97	11.97
A1250-08Y	8.75	10.22	13.22
A1250-30Y	36.25	37.72	40.72

● Wafer

型号Type	尺寸(mm)	
	A	B
A1250-02AWB	1.25	7.65
A1250-03AWB	2.50	8.90
A1250-04AWB	3.75	10.15
A1250-05AWB	5.00	11.40
A1250-06AWB	6.25	12.65
A1250-07AWB	7.50	13.90
A1250-08AWB	8.75	15.15
A1250-30AWB	36.25	42.65