
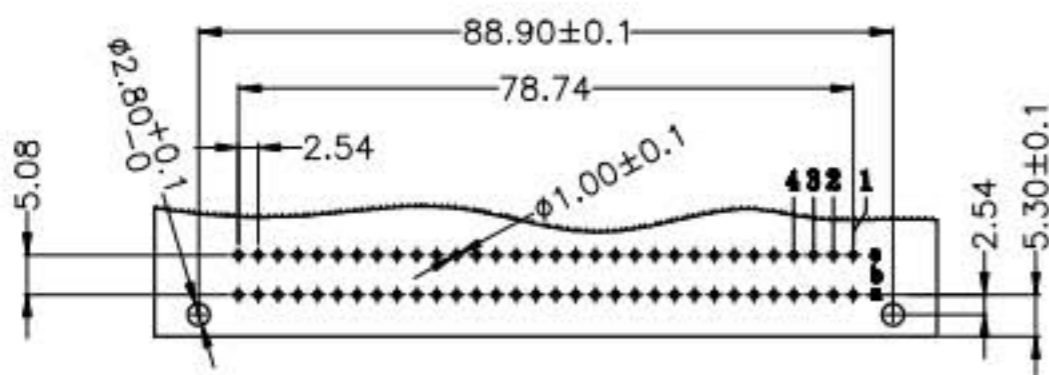
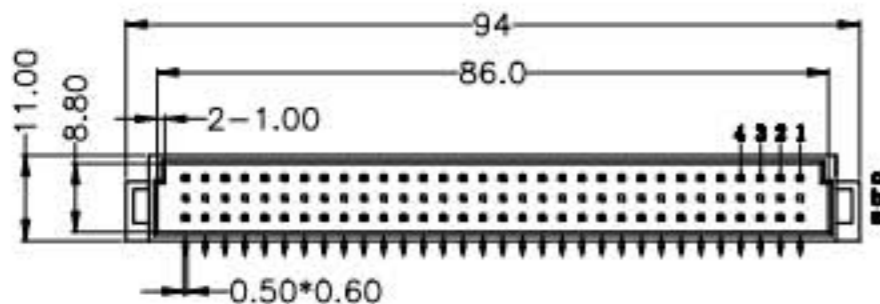
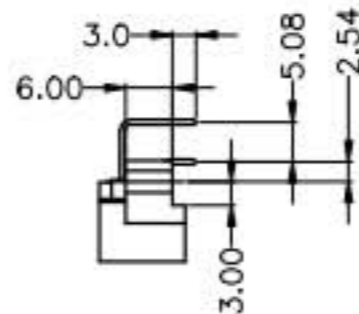


RoHS Compliant Customer Drawing

REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

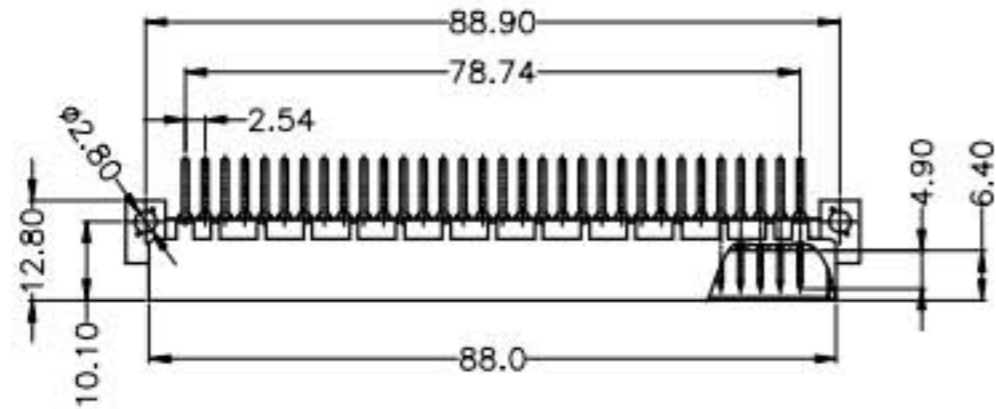

PCB LAYOUT(RECOMMENDED)  
(TOP VIEW TOL. :±0.05)

**SPECIFICATION**

**MATERIAL**

Housing: PBT+30%G. F UL94V-0 COLOR: BEIGE

Contacts: Brass

**CONTACT PLATING**

G-GOLD FLASH PLATED ALL OVER, N1 UNDER PLATED ALL OVER.

T-TIN PLATED ALL OVER, N1 UNDER PLATED ALL OVER.

S-GOLD FLASH PLATED ON CONTACT AREA, TIN PLATED ON SOLDER TAIL, N1 UNDER PLATED ALL OVER.

**ELECTRICAL**

Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -40° C TO +105° C

Part no. A02 A - 064 M X R 0002  
1 2 3 4 5 6 7

1. SERIES NO.

2. TYPE:

A=Standard

3. CONTACT NUMBER

4. CONTACT TYPE:

M=Male

5. CONTACT AREA PLATING:

R=3u" (Selective)

6. FUNCTION OPTION:

R=Right angle

7. Serial Number

勝特力材料 886-3-5773766  
勝特力电子(上海) 86-21-34970699  
勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

公差一覽表			nextwin <sup>®</sup> CONNECTOR		
TOLERANCE UNLESS OTHERWISE			單位	圖號	管正志
X.	±0.35	X*	±5°	mm	管正志
.X	±0.30	.X*	±2°	角法	管正志
.XX	±0.25	.XX*	±1°	比例	管正志
.XXX	±0.02	.XXX*	±0.5°	SCALE	1:1
DATE	2010. 11. 23		版本	AD	管正志
			APP		
					產品名稱
					管式插座 364 弯针 A型
					產品料號
					A02A-064MSR0002
					圖號
					ADAF 00