
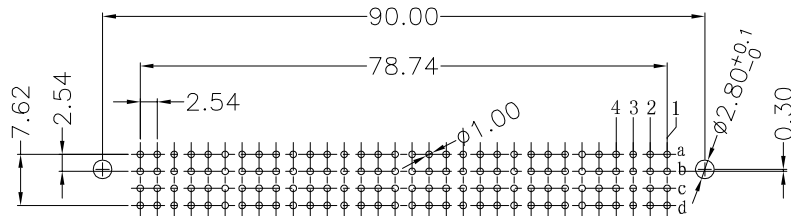
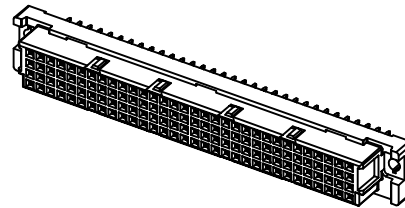
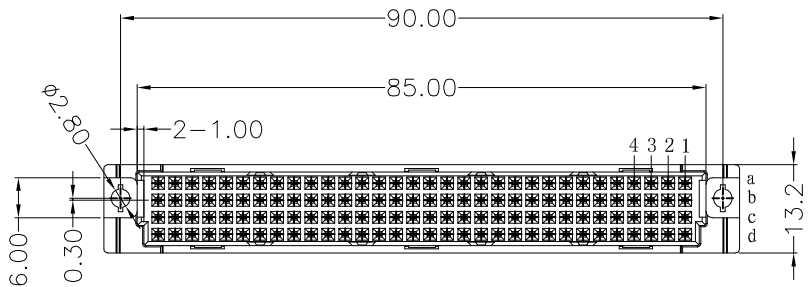



REV.	ECN NO.	DESCRIPTION	DATE	DESIGN

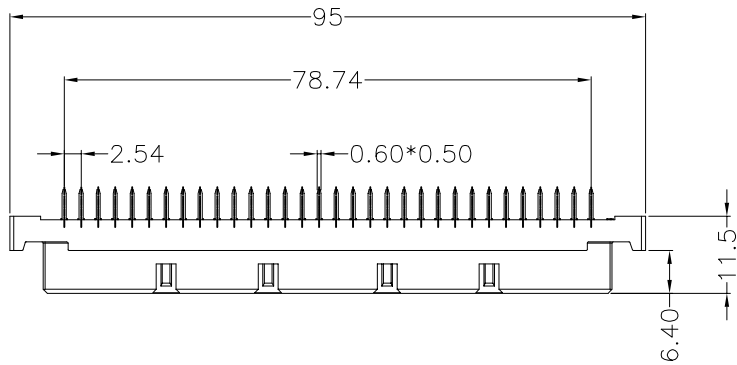

PCB LAYOUT(RECOMMENDED)
(TOP VIEW TOL. :±0.05)

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

SPECIFICATION

MATERIAL

Housing:PBT+30%G. F UL94V-0

Contacts:PhosPhor Bronze

CONTACT PLATING

G=GOLD FLASH PLATED ALL OVER,Ni UNDER PLATED ALL OVER.

T=TIN PLATED ALL OVER,Ni UNDER PLATED ALL OVER.

S=GOLD FLASH PLATED ON CONTACT AREA, TIN

PLATED ON SOLDER TAIL, Ni UNDER PLATED ALL OVER.

A=5u" (Selective)

R=3u" (Selective)

B=10u" (Selective)

P=8u" (Selective)

C=15u" (Selective)

E=2u" (Semi-Gold Matte Tin)

D=30u" (Selective)

F=3u" (Semi-Gold Matte Tin)

V=1u" (Selective)

U=5u" (Semi-Gold Matte Tin)

N=3u" (Gold)

ELECTRICAL

Current rating: 2 Amps .

Contact resistance: 20 mΩ initial

Insulation resistance: 1000 MΩ min @ 500 VDC

Dielectric withstanding voltage: 1000 VAC / minute

Operating temperature: -55° C TO +125° C

Part no. A03 A - 128 F X S 0 A X X
1 2 3 4 5 6 7 8 9 10

1. SERIES NO.

7. PROCESS OPTION:

2. TYPE:

0=Non Distribution

A=Standard

8. ROW SPACING:

3. CONTACT NUMBER

A=2.54mm(a+b+c+d)

4. CONTACT TYPE:

F=Female

9. CONTACT LENGTH:

5. CONTACT AREA PLATING:

SEE SPECIFICATION

A=2.8mm

B=4.0mm

F=3.5mm

6. FUNCTION OPTION:

S=STRAIGHT

10. INSULATOR COLOR:

5=BEIGE

A=Champagne

B=灰白色

公差一览表				TOLERANCE UNLESS OTHERWISE					
X.	±0.35	X°.	±5°	单位	mm	制图	管正志	产品名称	欧式插座 128P 直孔
.X	±0.30	.X°.	±2°	UNITS		DRAWING			
.XX	±0.25	.XX°.	±1°	角法		设计	管正志	产品料号	A03A-128FXS0AXX
.XXX	±0.02	.XXX°.	±0.5°	VIEW		DESIGN		PART NO.	
日期	2010.05.13	版本	A0	SCALE	1:1	审核		图号	A03A-128FXS0AXX-A0
DATE		VER		APPD		核准		DRAW NO	