


# PIN HEADER 2.0mm SMD

## MATERIAL

Insulator: NYLON-6T / PBT G.F  
 Contact Pin: Brass Square Pin  
 Plated: Gold plated  
 Tin plated

## SPECIFICATION

Current Rate: 1 AMP  
 Insulation Resistance: 5000M  $\Omega$  Min at DC 500V.  
 Contact Resistance : 20m $\Omega$  Max. at DC 100mA.  
 Operation Temperature: -55°C → 105°C

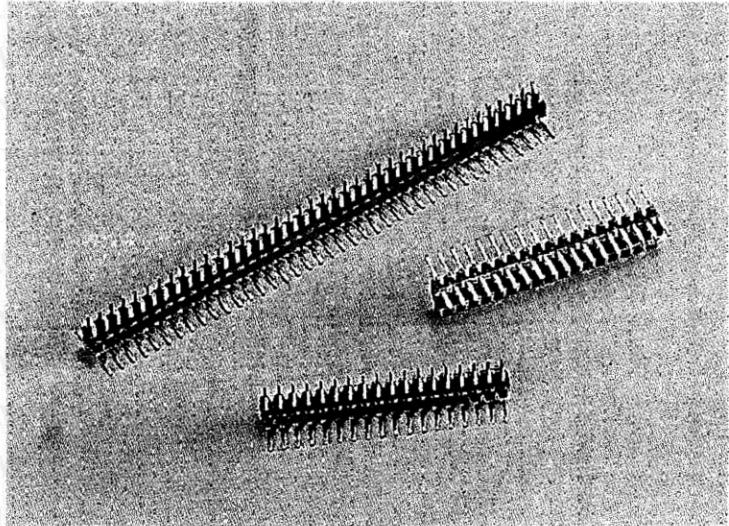

## HOW TO ORDER

PH 02 D 2 ★★ ★★ D ★★ ★★ B B  
 1 2 3 4 5 6 7 8 9 10

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

## 5 NO.OF.CONTACT


02.04.06.....80

## 6 CONTACT PLATING

GF--GOLD FLASH  
 01--GOLD 1U"  
 03--GOLD 3U"  
 05--GOLD 5U"  
 10--GOLD 10U"  
 PB-  
 T1-TIN 80U"  
 T2-TIN 100U"  
 T3-TIN 120U"  
 T4-TIN 160U"  
 H03--SELECTIVE GOLD 3U"  
 HF--SELECTIVE GOLD G.F

## 8 CATALOGUE INDICATOR

REF Code

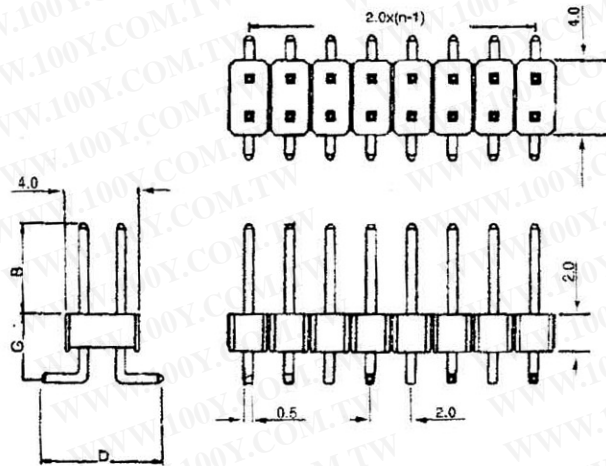

Code	D	B	G
0001	10.0	3.7	3.55