

1

2

3

4

5

A

B

C

D

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力電子(上海) 86-21-34970699  
 勝特力電子(深圳) 86-755-83298787  
<http://www.100y.com.tw>

## Specifications:


Current rating:1.0A AC,DC  
 Voltage rating:50V AC, DC  
 Contact resistance:20m ohm Max  
 Insulation resistance:1000M ohm Min  
 Withstanding voltage:500V AC/minute  
 Operating Temperature:-40°C ~ +105°C

## Materials:

Insulator:PBT UL94V-0  
 Standard Color:Black  
 Terminal:Phosphor Bronze  
 Finish:Gold Plated

## Dimension:

Pin.No	Dim.A	Dim.B	Pin.No	Dim.A	Dim.B
6	2.54	8.00	28	16.51	21.97
8	3.81	9.27	30	17.78	23.24
10	5.08	10.54	34	20.32	25.78
12	6.35	11.81	40	24.13	29.59
14	7.62	13.08	44	26.67	32.13
16	8.89	14.35	50	30.48	35.94
18	10.16	15.62			
20	11.43	16.89			
24	13.97	19.43			
26	15.24	20.70			

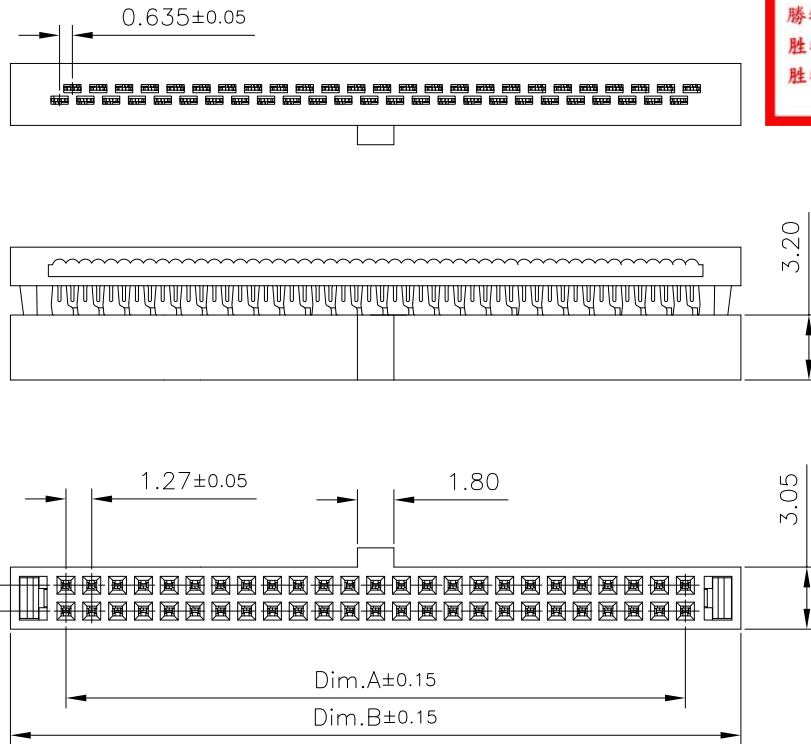

## Mating Part Number

3220-ALL	3210-XX-001-11-XX	3210-XX-001-12-XX
3210-XX-002-12-XX	3210-XX-003-12-XX	

RoHS Compliant

DRAWN:

Jerry

CHECKED:

APPROVAL:

Rory

GENERAL TOLERANCE:


.X =  $\pm 0.20$   
 .XX =  $\pm 0.15$

UNIT: MM

SCALE: 1:1

SHEET: 1 / 2

PROJECTION:



# CnC Tech

Industrial Cable and Connector Technology

DESCRIPTION:

1.27x1.27mm Flat Cable IDC Socket

PART NO:

3230-XX-0102-00

SIZE

A4

REV

DATE

FILE

BY

05-FEB-2020