

1	2	3	4	5
---	---	---	---	---

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical

Current Rating : 1 Amp






Contact Resistance : 30 mΩ max.

Insulation Resistance : 3000 MΩ min.



Dielectric Withstanding Voltage : 500V AC for 1minute

Operating Temperature : -40℃ to +105℃

• Mating Suggestion : C15, C18, C17 & C18 series.

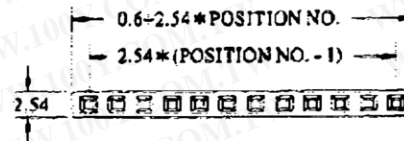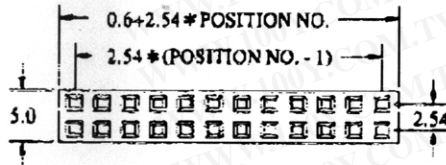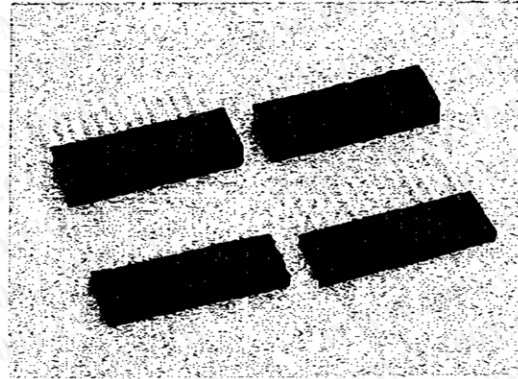

RECOMMENDED P.C.B LAYOUT

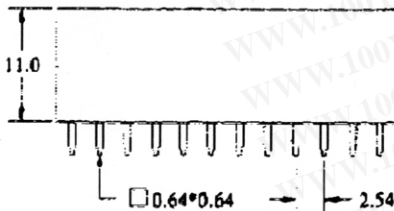

RECOMMENDED P.C.B LAYOUT

				DRAWN:	GENERAL TOLERANCE:	<div style="border: 1px solid red; padding: 5px;"> 勝特力材料 886-3-5753170 勝特力电子(上海) 86-21-54151736 勝特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw </div>	SIZE
E							
D							
C				CHECKED:	UNIT:		
B					SCALE:		
A			JECSON		SHEET:	DESCRIPTION:	A4
REV	Date	FILE	BY		PROJECTION:	PART NO:	