


# 2W2弯脚公母焊板头



纯铜镀金插针，抗氧化强



## Pivot Dimension

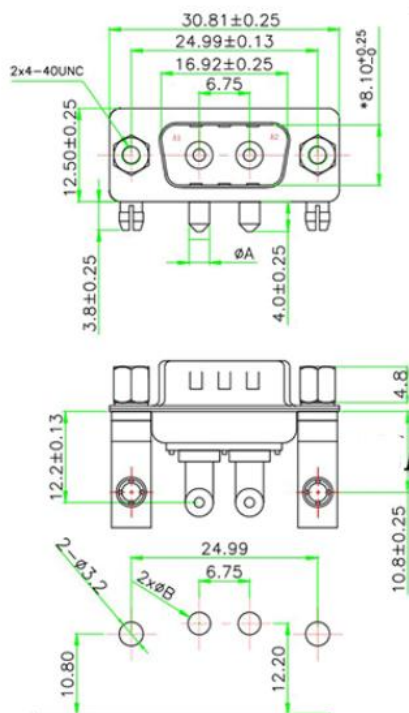

## RoHS Component



Pin No	电流强度(A)	ø1	PCB 间距
1	10	1.7	2.0
2	20	2.75	3.05
3	30	3.3	3.6
4	40	3.8	4.10

## MATERIALS AND FINISH

SHELL: STEEL OR COPPER ALLOY MATERIAL, Tin/Ni OR Au FINISHED.  
CONNECTOR INSULATOR: PBT THERMOPLASTIC, 30% GLASS FILLED, UL 94V-0 RATED.

HIGH POWER CONTACT CURRENT RATING: 10, 20, 30 OR 40 AMPS.  
THE WORKING VOLTAGE: 300V.  
HIGH POWER CONTACT RESISTANCE: 2.7 MILLIOHMS MAX.  
DIELECTRIC WITHSTANDING VOLTAGE: 1000 V AC FOR 1 MINUTE.  
INSULATION RESISTANCE: 2000 MEGAOHMS MIN.  
TEMPERATURE RATING: -55° ~ +125°.

TOLERANCE: XX ±0.20 XXX ±0.30 XXXX ±0.13 X* ±0* X* ±0*	DRAWN BY: _____ DATE: 2009.03.30	PART NAME: 2W2 公 电流母板式焊10.8支架 插4-40UNC*1.8螺柱
_____	CHECKED BY: _____ DATE: 2009.01.18	DRAW NO. _____ PART NO. _____

勝特力電材超市-龍山店 886-3-5773766  
 勝特力電材超市-光復店 886-3-5729570  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
<http://www.100y.com.tw>